

73 Amateur Radio Today

AUGUST 1994
ISSUE # 407
USA \$2.95
CANADA \$3.95
A WGI Publication
International Edition

**Five Easy
Projects
You Can
Build**

**73 Reviews
Azden's 6m Mobile
Drake's New Receiver
JPS' Digital Filter**

**Special Advertising Insert
Summer Catalog from
Radio City, Inc.**

*****5-DIGIT 68103
#00000191946#MR JUN76
SERIALS PROCESSING DEPT
UNIV MICROFILMS INT
300 N ZEEB RD
ANN ARBOR MI 48103-1553



The IC-Δ100H Takes The Magic Beyond 3 Wishes!

Exclusive Triple Band Capability

- Three independent band units for 2 M, 440 MHz and 1.2 GHz operation (simultaneous receive).
- Three independent displays can freely select the desired band unit.
- Each display indicates S/R/F, volume and squelch levels.
- Each display is controlled by a separate volume and tuning knob.
- Select from 3 external speaker jacks.


8 POSSIBLE COMBINATIONS!

#1	#2	#3
2M	440MHz	1.2GHz
2M	440MHz	440MHz
2M	2M	1.2GHz
2M	2M	440MHz
440MHz	440MHz	1.2GHz
440MHz	440MHz	440MHz
440MHz	2M	1.2GHz
440MHz	2M	440MHz

More than a tri-band radio, the IC-Δ100H gives you true freedom of choice!

- No removal or installation of additional band units required.
- Each operating band has a separate antenna connector to enable duplex/triplexer use without any mismatching antenna loss (not one common antenna for multi-signal, one band operation like you see in competitive models).

Cross band double duplex (transmit on one band while receiving on two others) and full crossband duplex (transmit on one band and receive on another) is possible. The one-touch PTT enables telephone-like conversations without having to continually press PTT.

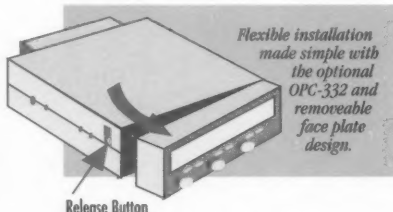

Remote Installation Options

- One Body** – install as a complete unit.
- Separate** – detach the front panel and mount each separately (see illustration).
- Remote** – Mount the main body in the trunk (OPC-333 and OPC-335 req.).

Incredible Performance

- AFC-RIT, AFC-VXO, manual RIT and manual VXO modes to compensate for "off frequency" of the Tx station (1.2 GHz).
- High Sensitivity – less than .16μV.
- Double-conversion superhetrodyne receiver system.
- More than 2.4 W audio output power.

Memory Bank System

642 memory channels organized in two separate banks* (very convenient for two ham families).

Options	Bank/User #1			Bank/User #2			TOTAL
Bank	#1	#2	#3	#1	#2	#3	
Normal*	100	100	100	100	100	100	600
Scan Edge	6	6	6	6	6	6	36
Call	1	1	1	1	1	1	6
Total IC-Δ100H Memory Channels:							642

The memory bank system can even be customized for "his" and "hers" operation!

- Priority Watch** – Scans one (or more) memory channels per band while operating on a VFO frequency.
- Transfer call** or memory channel contents to VFO. Particularly useful when searching for signals around a memory channel frequency and for recalling the offset frequency, tone frequency, etc.
- 14 DTMF** autodial memories for autopatching, accessing repeaters and controlling other equipment, etc.

* Stores operating frequency, duplex direction, offset frequency, subaudible tone frequency, encode on/off, tone squelch on/off and skip information.

Microphone Remote Controls

A multi-function keyboard with complete control over the IC-Δ100H.

The beep tones for each band are different and distinguishable so you can keep your eyes on the road.

Over 22 functions are at

your fingertips with the IC-Δ100's unique microphone keyboard (see chart above)!

You Can Control All Of These Functions From The Microphone Keyboard!	
<input checked="" type="checkbox"/> Power On/Off <input checked="" type="checkbox"/> Select Main Band <input checked="" type="checkbox"/> Change Operating Band <input checked="" type="checkbox"/> Volume Adjust <input checked="" type="checkbox"/> Squelch Adjust <input checked="" type="checkbox"/> Mode Select <input checked="" type="checkbox"/> Duplex Select <input checked="" type="checkbox"/> Frequency Select <input checked="" type="checkbox"/> Memory Channel Select <input checked="" type="checkbox"/> Mute Bands <input checked="" type="checkbox"/> Scan or Priority Watch <input checked="" type="checkbox"/> Pager On/Off	<input checked="" type="checkbox"/> Code Squelch <input checked="" type="checkbox"/> Tone, Tone Squelch <input checked="" type="checkbox"/> Pocket Beep On/Off <input checked="" type="checkbox"/> AFC On/Off <input checked="" type="checkbox"/> Attenuator On/Off <input checked="" type="checkbox"/> Set Mode <input checked="" type="checkbox"/> DTMF Auto or Manual <input checked="" type="checkbox"/> Operating Freq. Annc. (with opt. UT-66 synth.) <input checked="" type="checkbox"/> Write VFO Contents to Memory or Call Channel <input checked="" type="checkbox"/> Lock All Mic Keys or Keyboard Only

Other Great Features

- External remote control via another transceiver (UT-75 required)
- Tri, dual or mono band operation
- Sub band access/mute/busy beep functions
- Optional pocket beep and tone squelch
- Opt. pager/code squelch
- Tone encoder built in
- Multiple scans

ICOM America, Inc. Corporate Headquarters:
2380-116th Ave. N.E., Bellevue, WA 98004
All stated specifications subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions. The ICOM logo is a registered trademark of ICOM, Inc. Δ1005947



IC-Δ100H Triple Band Mobile Transceiver (shown with the optional OPC-332)



For more information call our brochure hotline: (266) 450-6088

CIRCLE 175 ON READER SERVICE CARD

ICOM



STARTEK INTERNATIONAL INC. FREQUENCY COUNTERS

FIND FREQUENCIES FAST with the StarTek ATH™ Series
Four **AUTO TRIGGER & HOLD** Models, **TWO Priced Below \$200!!**

NEW!
ATH-10



\$149.
\$179 value

**MADE
IN
USA**

WARRANTY
5 Years Parts
1 Year Labor

Optional #TA-90 Antenna

ATH™ SERIES FEATURES:

- Easy to use - simple controls
- Ultra fast response time
- Extra **BRIGHT LED** digits
- AC or Battery operation
- Maximized sensitivity



\$189.
\$235 value



ACCESSORIES

#CC-90	Soft Case for all models.....	\$12.
#TA-90	Telescope BNC antenna.....	12.
#TA-90-L	Telescope Elbow BNC antenna.....	16.
#RD-150	150 MHz Rubber Duck antenna.....	16.
#RD-2750	27 & 50 MHz Rubber Duck antenna.....	28.
#RD-450	450 MHz Rubber Duck antenna.....	16.
#RD-800	Cellular phone band RD antenna.....	29.
#C/6A ABOVE 7 items, SAVE \$30.99.		
#M-207-IC	Interface Cable MFJ ant. analyzers.....	10.
#P-110	200 MHz 1X-10X probe.....	39.
#LP-22	Low Pass, Audio probe.....	25.
#DC-10	Direct, 50 OHM probe.....	20.

Model 1350

Economy Frequency Counter
1-1300 MHz, 3 gate times,
Hold switch
(No ATH or Bar Graph)....\$119.

All instruments are
true Pocket Size:
4" High x 3.5" Wide x
1" Deep, <14 cubic in.
and are shipped with
factory installed
Ni-Cad batteries and
AC charger/adaptor.
Antennas are
optional.

FEATURES

	ATH-10 \$149 reg \$179	ATH-15 \$189 reg \$235	ATH-30 \$249 reg \$299	ATH-50 \$289 reg \$339
FREQUENCY RANGE	1 MHz - 1200 MHz	1 MHz - 1500 MHz	1 MHz - 2800 MHz	5 HZ - 2800 MHz
AUTO TRIGGER & HOLD	YES	YES	YES	YES
SIGNAL BAR GRAPH	NO	YES	YES	YES
LOW BATTERY IND.	NO	YES	YES	YES
ONE-SHOT & RESET	NO	OPTIONAL	YES	YES
HI-Z LOW RANGE	NO	NO	NO	YES

OPTION #HST-15 is a high accuracy, high stability, time base upgrade that
can be ordered with any ATH series model (0.2PPM TCXO).....\$100.

Extend readability distance with **BAND PASS FILTERS. \$49 ea.**

#LP-60	DC - 60 MHz	#BP-150	130 - 500 MHz
#HP-400	400 - 1500 MHz	#HP-800	800 - 2000 MHz
#BP-4 All 4 Filters \$189			

Factory Direct
Order Lines

SAME DAY SHIPMENT
Orders & Information
305-561-2211
800-638-8050

FAX 305-561-9733



STARTEK INTERNATIONAL INC.

398 NE 38th St., Ft. Lauderdale, FL 33334


Terms: Shipping/handling charges U.S. & Canada 5% (\$5 min., \$10 max) Others add 15%. FL residents add 6% tax. COD fee \$5.
VISA, MC, Discover accepted. Prices & specifications subject to change without notice or obligation.

CIRCLE 24 ON READER SERVICE CARD

COMET


MODERN, MULTI-BAND ANTENNA SYSTEMS

BASE/REPEATER ANTENNA PRODUCTS



Featuring the COMET exclusive SLC System. The SLC actually increases the gain of the Dual/TriBand Antennas. A completely pre-formed phasing coil and phosphorous copper element produces a low-loss, highly effective, high gain antenna. All COMET antennas are pre-tuned and come complete with all mounting hardware. Simply mount to your mast and experience incredible COMET performance!

COMET DUAL-BAND



GP-9(N) Dual-Band 146/446MHz Base/Repeater Antenna
Gain & Wave: 146MHz 8.5dBi $\frac{1}{2}$ wave x 3 VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 11.9dBi $\frac{1}{2}$ wave x 8 Length: 17' 8" Weight: 5lbs. 11ozs.
Connector: SO-239 (GP-9), N-type (GP-9N) Mounts to Mast Size: 1.25"-2.50"
Construction: Heavy duty fiberglass, 3 sections, 92MPH wind survival



GP-6 Dual-Band 146/446MHz Base/Repeater Antenna
Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 Length: 10' 2" Weight: 3lbs. 8oz.
Connector: Gold-Plated SO-239 Mounts to Mast Size: 1.25"-2.50"
Construction: Heavy duty fiberglass, 2 sections, 112MPH wind survival



GP-3 Dual-Band 146/446MHz Base/Repeater Antenna
Gain & Wave: 146MHz 4.5dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 200W PEP
446MHz 7.2dBi $\frac{1}{2}$ wave x 3 Length: 5' 10" Weight: 2lbs. 9ozs.
Connector: Gold-Plated SO-239 Mounts to Mast Size: 1.25"-2.50"
Construction: Single piece fiberglass, 130MPH wind survival

COMET MONO-BAND



CA-ABC23 Mono-Band 146MHz Base/Repeater Antenna
Gain & Wave: 146MHz 7.8dBi $\frac{1}{2}$ wave x 3 VSWR: 1.5:1 or less Max Power: 200W PEP
Connector: SO-239 Length: 14' 12" Weight: 3lbs. 8ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Thick-wall aluminum, 3 sections, 70MPH wind survival



CA-712EF Mono-Band 446MHz Base/Repeater Antenna
Gain & Wave: 446MHz 9dBi $\frac{1}{2}$ wave x 12 VSWR: 1.5:1 or less Max Power: 200W PEP
Connector: N-type Length: 10' 5" Weight: 2lbs. 12ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Heavy duty fiberglass, 2 sections, 105MPH wind survival



CA-62DB Mono-Band 6 Meter FM Antenna
Gain & Wave: 52MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 500W PEP
Connector: SO-239 Length: 21' 8" Weight: 5lbs. 11ozs.
Mounts to Mast Size: 1.25"-2.50"
Construction: Thick-wall aluminum, 5 sections, 100MPH wind survival

COMET products are available from most major dealers. For customer service, or a complete catalog, please call us at 800/962-2611. We're confident COMET products and accessories will enable you to enjoy Amateur Radio to its fullest!




NCG COMPANIES
1275 North Grove Street, Anaheim, CA 92806
(714) 630-4541 FAX (714) 630-7024

COMET TRI-BAND




GP-15 Tri-Band 52/146/446MHz Base/Repeater Antenna
Gain & Wave: 50-54MHz 3.0dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 300W PEP
146MHz 6.2dBi $\frac{1}{2}$ wave x 2 Length: 7' 11" Weight: 3 lbs. 1 oz.
446MHz 8.6dBi $\frac{1}{2}$ wave x 4 Mounts to Mast Size: 1.25"-2.50"
Connector: Gold-Plated SO-239 Construction: Single piece heavy-duty fiberglass,
112MPH wind survival 50MHz band is tunable by radial adjustment, 2MHz band-width.



CX-333 Tri-Band 146/223/446MHz Base/Repeater Antenna
Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 120W PEP
223MHz 7.8dBi $\frac{1}{2}$ wave x 3 Length: 10' 2" Weight: 3 lbs. 10 ozs.
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 Mounts to Mast Size: 1.25"-2.50"
Connector: Gold-Plated SO-239
Construction: Heavy duty fiberglass, 2 sections, 112MPH wind survival



GP-93 Tri-Band 146/446/1280MHz Base/Repeater Antenna
Gain & Wave: 146MHz 4.5dBi $\frac{1}{2}$ wave VSWR: 1.5:1 or less Max Power: 300W PEP (146MHz)
446MHz 7.2dBi $\frac{1}{2}$ wave x 3 Length: 5' 7" Weight: 200W PEP (446/1.2)
1280MHz 10dBi $\frac{1}{2}$ wave x 6 Mounts to Mast Size: 1.25"-2.50" Weight: 2 lbs. 8ozs.
Connector: Gold-Plated N-type
Construction: Single piece heavy duty fiberglass, 112MPH wind survival



GP-98 Tri-Band 146/446/1280MHz Base/Repeater Antenna
Gain & Wave: 146MHz 6.5dBi $\frac{1}{2}$ wave x 2 VSWR: 1.5:1 or less Max Power: 300W PEP (146MHz)
446MHz 9.0dBi $\frac{1}{2}$ wave x 5 Length: 9' 8" Weight: 200W PEP (446/1.2)
1280MHz 13.5dBi $\frac{1}{2}$ wave x 12 Mounts to Mast Size: 1.25"-2.50" Weight: 3 lbs. 8ozs.
Connector: Gold-Plated N-type
Construction: Heavy-duty fiberglass, 2 sections, 112MPH wind survival

CROSS NEEDLE METERS

- Separate Meter and RF Sensor allows for convenient placement of the meter.
- Cross Needle Meter provides FWD, REF, and VSWR simultaneously.
- The RF-Sensor is a compact design, and has an extremely low-loss circuit.
- Beautifully illuminated when connected to power supply.
- 6 foot cable standard.
- Optional EKS-3 10 foot extension cable for a total of 16 feet between the sensor and meter.
- Compact Size: (L) 4.75" x (W) 1.75" x (H) 3.5"

CMX-1	CMX-2	CMX-3
1.8-60MHz	1.8-200MHz	140-525MHz
0-2KW	0-200W	0-200W
30/300/2KW	20/50/200W	20/50/200W



NEW!

THE TEAM

PUBLISHER/EDITOR
Wayne Green W2NSD/1

ASSOCIATE PUBLISHER/EDITOR
David Cassidy N1GPH

MANAGING EDITOR
Hope Currier

SENIOR/TECHNICAL EDITOR
Charles Warrington WA1RZW

EDITORIAL ASSOCIATE
Joyce Sawtelle

CONTRIBUTING EDITORS
Bill Brown WB8ELK
Mike Bryce WB8VGE
Joseph E. Carr K4IPV
David Cowhig WA1LBP
Michael Geier KB1UM
Jim Gray W1XU/7
Chuck Houghton WB6IGP
Arnie Johnson N1BAC
Dr. Marc Leavey WA3AJR
Andy MacAllister WA5ZIB
Joe Moell K0OV
Carole Perry WB2MGP
Jeffrey Sloman N1EWO

ADVERTISING SALES MANAGER
Dan Harper
ADVERTISING COORDINATOR
Judy Walker
1-603-924-0058
1-800-274-7373
FAX: 1-603-924-9327

GRAPHIC DESIGN
Suzanne Self

GRAPHIC SERVICES
FilmWorks, Inc.
Antrim NH

GRAPHICS MANAGER
Linda Drew

CIRCULATION MANAGER
Harvey Chandler
To subscribe: 1-800-289-0388

WAYNE GREEN, INC.

Editorial Offices
70 Route 202N
Peterborough NH 03458
1-603-924-0058;
FAX: 1-603-924-9327

Subscription Services
1-800-289-0388

Foreign Subscribers
1-609-461-8432

Reprints: \$3.00 per article.
Back issues: \$4.00 each.
Write to 73 Amateur Radio Today,
Reprints, 70 Route 202N,
Peterborough, NH 03458.

Printed in the U.S.A. by Quad
Graphics, Thomaston, Georgia.

73 Amateur Radio Today

August 1994
Issue #407

TABLE OF CONTENTS

FEATURES

- 10 Stand-Alone DDS**
The Kendraboard provides PC-free frequency control.VA3BHW
- 26 A Novel Dual-Band, Single Feedline, VHF/UHF Antenna**
Good performance for less than a sawbuck.W7KOH
- 30 Design and Build a Dummy Antenna**
A 40W, 50 ohm RF dummy load with a VSWR of 1.3:1 at 500 MHz ...VE5ZE
- 53 The Coleman (Mini)-Kilowatt**
Extend your station's working range for next to nothing.WB2WIK/6
- 65 Mini-Joystick Scanning**
Shift your tuning into high gear!WB2WPM

REVIEWS

- 22 The Azden PCS-7500H 6 Meter FM Transceiver**
50 watts on 6 in an attractive, low-cost mobile.WB2WIK/6
- 38 The Drake SW8 World Band Shortwave Receiver**
A constant companion, at home or on the go!WA4BLC
- 42 JPS Communications' NRF-7**
Clean up your audio with state-of-the-art DSP.WB8RRT

DEPARTMENTS

- 72 Above and Beyond**
- 81 Ad Index**
- 76 Ask Kaboom**
- 89 Barter 'n' Buy**
- 62 Carr's Corner**
- 76 Dealer Directory**
- 17 Feedback Index**
- 70 Ham Help**
- 66 Hams with Class**
- 57 Hamsats**
- 69 Homing In**
- 6 Letters**
- 4 Never Say Die**
- 90 New Products**
- 68 Packet & Computers**
- 96 Propagation**
- 60 QRP**
- 8 QRX**
- 96 Random Output**
- 58 RTTY Loop**
- 78 73 International**
- 85 Special Events**
- 76 Updates**



What are these two smiling about? Turn to page 10 to find out.

FEEDBACK... FEEDBACK!

It's like being there—right here in our offices! How? Just take advantage of our FEEDBACK card on page 17. You'll notice a feedback number at the beginning of each article and column. We'd like you to rate what you read so that we can print what types of things you like best. And then we will draw one Feedback card each month for a free subscription to 73.

On the cover: Time to heat up the soldering iron and get into a 73 construction project! (Photo by David Cassidy N1GPH.)

FB

Editorial Offices
70 Route 202N
Peterborough NH 03458
phone: 603-924-0058

Advertising Offices
70 Route 202N
Peterborough NH 03458
phone: 800-274-7373

Circulation Offices
70 Route 202N
Peterborough NH 03458
phone: 603-924-0058

Manuscripts Contributions in the form of manuscripts with drawings and/or photographs are welcome and will be considered for possible publication. We can assume no responsibility for loss or damage to any material. Please enclose a stamped, self-addressed envelope with each submission. Payment for the use of any unsolicited material will be made upon publication. A premium will be paid for accepted articles that have been submitted electronically (CompuServe ppn 70310.775) or on disk as an IBM-compatible ASCII file. You can also contact us at the 73 BBS at (603) 924-9343, 300—2400 baud, 8 data bits, no parity, one stop bit. All contributions should be directed to the 73 editorial offices. "How to Write for 73" guidelines are available upon request. US citizens must include their Social Security number with submitted manuscripts.

73 Amateur Radio Today (ISSN 1052-2522) is published monthly by Wayne Green Inc., 70 Route 202 North, Peterborough NH 03458. Entire contents ©1994 by Wayne Green Inc. No part of this publication may be reproduced without written permission of the publisher. For Subscription Services, write to 73 Amateur Radio Today, P.O. Box 7693, Riverton NJ 08077-7693, or call 1-800-289-0388. The subscription rate is: one year \$24.97, two years \$39.97; Canada: \$34.21 for one year, \$57.75 for two years, including postage and 7% GST. Foreign postage: \$19.00 surface or \$42.00 airmail additional per year. All foreign orders must be accompanied by payment in US funds. Second class postage paid at Peterborough, NH, and at additional mailing offices. Canadian second class mail registration #178101. Canadian GST registration #125393314. Microfilm Edition—University Microfilm, Ann Arbor MI 48106. POSTMASTER: Send address changes to 73 Amateur Radio Today, P.O. Box 7693, Riverton NJ 08077-7693.

Contract: Under orders from Uncle Wayne you are hereby obligated to share this copy of 73 with someone new. Or better yet, beat the rush and give a gift subscription!

NEVER SAY DIE

Wayne Green W2NSD/1



Fan or Fanatic?

I've known several hams whose wives divorced them, naming amateur radio as the correspondent. Look, this is supposed to be a hobby! I know many DXers who stay home from work when there is a new country on the air. I know repeater nuts who have an HT with them day and night, tuned to their repeater.

There have been some times in my life when I've gone overboard hamming. I would spend my afternoons building equipment, my nights operating, and my mornings sleeping. I was so busy hamming that I didn't have time to land a job. I lived happily on my unemployment payments. The positive side was that I sure built a lot of stuff. I had the whole cellar packed solid with steel shelves of ham equipment. I had so much stuff I'd built, and so many parts for building, that when I decided to move to New Hampshire in 1962 it took five truckloads to move everything. I'd kept the stuff beyond what my cellar could hold in several nearby rented garages.

I had a 75m AM kilowatt, another all-band PP-813 kilowatt, an SCR-522 with a surplus kilowatt amplifier on 2m, about 50 watts on 6m with another converted 522, all kinds of Teletype and test equipment. I worked DX. I was active in most of the major contests. I worked RTTY, NBFM, AM, aurora on 2m, and so on. I had tons of fun doing it.

This all turned out to be solid gold for me when I unexpectedly found myself the editor of *CQ* magazine. All that time spent on my background suddenly was useful. Indeed, I couldn't have done the job if I hadn't invested all that time in the hobby.

But outside of gunning for the thankless job of editing a ham rag, the total devotion of your life to amateur radio is dumb. I don't doubt for one minute that there really is a special place in heaven for rabid DXers, I just happen to think that it is well padded. There are probably well-padded cells for our other fanatics.

Mind you, I have no quarrel with hams working DX, as long as it isn't actually important to them. Working DX and earning a place on the ARRL Honor Roll is fine, as long as it isn't important. I got up somewhere over 300

countries worked and stopped counting. I had great fun pioneering NBFM and then SSB. I had fun with SSTV, when that got started. And RTTY. I loved learning and doing. It was wonderful fun exploring 10 GHz and working seven states from my little hill in southern New Hampshire. I've enjoyed competing in just about every contest the ARRL has come up with. In retrospect, I can't think of any amateur radio activity that I regret having investigated. And there aren't many I've missed. But I've never let the hobby become an obsession, and I've never had one word of complaint from my wife about my ham activities.

It's a hobby. It's for fun. So get the most out of it you can. Think about it—are you in a rut? Are you just getting on the air and gassing with the same 75m crowd endlessly? I tried that for a couple of years and got over it. Oh, I had some wonderful time with W1MLJ in Barre (VT), W1IF, Bill and Olga, in Peabody (MA), and Homer W1KPL in Jaffrey (NH). But that didn't keep me from mountaintop expeditions on 2 meters, from racking up a fair DX score, or winning sweepstakes contests for my section.

How come you haven't put up an antenna and tried some satellite contacts? What's the matter with you? It's a ball!

Tried Rallying Yet?

Have you ever, as a ham, provided communications for a local sports car club putting on a rally? You and your ham club can have a ball—just offer your services to car clubs, or even to the Sports Car Club of America (SCCA), which organizes the national rallies.

For that matter, if you haven't ever gone on a rally, you've missed a lot of fun. A bunch of us hams around Brooklyn (NY) used to go on rallies just about every weekend. And you don't have to have a sports car to do it, though it's more fun in a sports car.

There are a lot of different kinds of rallies, but the ordinary garden variety rally consists of from 10 to around 100 cars, each with a driver and navigator team, driving over ordinary roads and highways, and at below the speed limit, following a set of sometimes tricky route instructions.

The cars paste large numbers on their sides so the people at the checkpoints can identify them, and are started at one-minute intervals. The organizers give the teams the route instructions one minute before blastoff. These are called time-speed-distance (TSD) rallies. The instructions give the speed to be driven over each segment of the rally, and usually provide fairly simple instructions for making turns and speed changes.

Saturday morning rallies are often short, running perhaps 75 miles. A weekend rally can cover several hundred to over a thousand miles. On busy rally weekends I used to be able to go on a Friday night rally, another Saturday, and still a third on Sunday. There were a ton of rallies around Long Island.

Every few miles there is a checkpoint—usually hidden. They time you as you pass, usually taking one point off your score for every 1/100th minute early or late. That's about a half second.

The winners are seldom off more than one point per checkpoint on the average. This means, if you have any serious intention of winning, you have to be able to measure your mileage down to a hundredth of a mile, and your time to the hundredth of a minute. Then the navigator, in addition to helping the driver find turns and speed-change locations (change average speed to 35.71 mph at the Wishing Well sign), also has to run a calculator or computer and let the driver know what his odometer should read when the watch's second hand is straight up.

In most sports cars fitted for rallies the hundredths odometer and a stopwatch bracket are mounted on the dash so the driver can see them at a glance. The navigator reads off the instructions and computes. This is no job for anyone who tends to get carsick!

There are little complications which affect the calculations. Since no two cars have odometers that read exactly the same, in order to match your speed with that of the car used to lay out the rally, you need a mileage check. This is usually at 10 miles out. When you reach the point where the official car's odometer reads 10 miles you see what your odometer reads, and from then on you have to correct

all of the instruction average speeds to take this difference into consideration. Hey, if it was easy, it wouldn't be so much fun. To win rallies you have to be a precision driver and a navigator who makes faultless calculations on the run and under pressure. If you get hung up in traffic or by stoplights you have to get back on schedule as quickly as possible. There's nothing like getting stuck behind a little old lady on a back country road to cause stress. Tough.

Most rallyists have a shortwave converter to pick up the time signals from CHU or WWV, just to make sure their watch isn't a half second off after a few hours bumping along on back roads.

Hams can help car clubs by helping work the checkpoints and then radioing in the points lost by each team to the finish line. That makes it possible to determine the winners much faster. Without radios, the checkpoint people have to drive to the finish with their scores, and then the organizers have to total them up. With many rallies having a dozen or so checkpoints, this can take awhile. It's better to get the results announced quickly and hand out the trophies so everyone can go home and get some rest.

I was reminded of this the other day when I was out in the barn looking through some boxes and came upon a couple cartons of old rally trophies. The silver is a little tarnished now. I should polish 'em up, I suppose. Back in 1958, when I bought my Porsche Speedster, I got involved with rallies, and I enjoyed them until I moved to New Hampshire in 1962. There's not much in rallies up here in the mountains and I miss 'em.

They've probably got some great computers for TSD these days. Thirty years ago most of us used the Curta calculators. They were made in Liechtenstein and looked like pepper grinders. They were made for currency calculations, but they were ideal for rallies. I liked 'em so much I went to Liechtenstein and became an importer. I found the very best rally watches (Hanhart) in Schwenningen, Germany, and imported those too. I had quite a good importing business going selling rally equipment—including my own special speed tables, which beat the heck out of any others.

I wonder if Walter Cronkite remembers coming to my house in Brooklyn to buy a Curta calculator? He used to be big on rallying—until he and his navigator ended up in a lake one day.


You might want to try some local car rallies and see how much fun they are. Who knows, if you get addicted you might go for a Miata, they're so reasonable. They're the closest thing there is to the good old Porsche Speedster. In the meanwhile your club members can have a lot of fun helping local car clubs with their checkpoints and getting scores in early.

Poisoning Little Minds

One of the things that helped suck

Continued on page 82

Simply A Superior 1.3 GHz Spectrum Analyzer

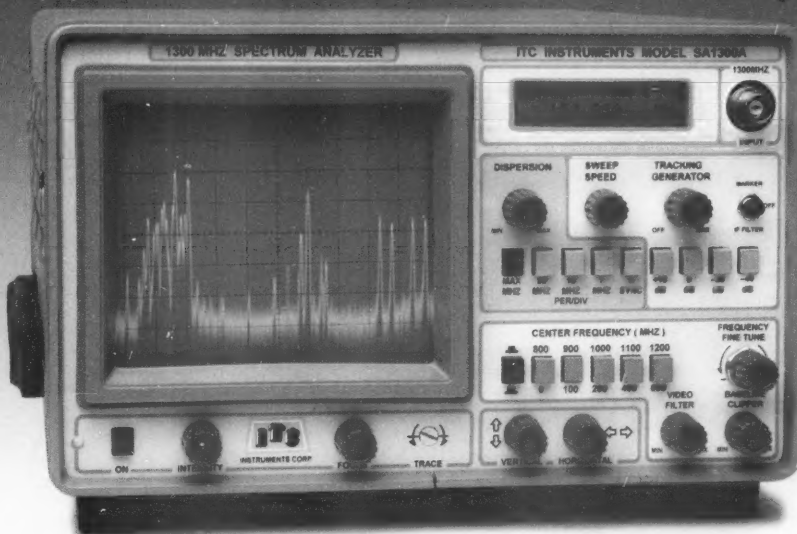

1-1300 MHz In One Sweep \$1,795.

MADE IN USA -10KHz Resolution Band Width -7 Digit Center Frequency Display

**MARINE, TWO-WAY, HAM, AM FM SW BROADCAST RADIO - CATV, SATELLITE. SYS., SURVEILLANCE
TUNE DUPLEXERS, AMPS, FILTERS, SECURITY TRANS, & RECEIVERS - EMI, RFI, FCC, TESTING**

EXCLUSIVE DISPERSION ZOOM
ITC SA Series exclusive Dispersion Zoom lets you zoom in on **any Center Frequency** signal, from any one of five calibrated Dispersion positions. Preset at >140 MHz, 50MHz, 10MHz 1MHz and zero MHz per division. The SA1300A displays greater than 1300 MHz on the screen at one time yet allows instant zoom to any Dispersion Scan Width as low as zero MHz per div. Allowing for total control over all **Dispersion Scan Widths** settings.

80 dB ON SCREEN

130 dB total Dynamic range **110 dBm Sensitivity**. At Narrow and Wide Band Width settings. Performance you would expect only from a \$10,000 Analyzer.

ULTIMATE LOW COST ANALYZER
ITC Spectrum Analyzers are the best performance to price ratio Analyzers on the market today. No other low cost Analyzer comes close to the Superior performance and quality of an ITC Analyzer. **Total flexibility and ease of operation.** SA1300A gives you full control over the Resolution Band Width and Freq. Span widths. Plus Vertical Position, Baseline Clipper, Sweep Speed, Video Filter, 4 Input Attenuator settings, 10 Frequency Select settings.

MODEL SA1800B 1800 MHz

Covers 1-1300 MHz and 850-1850 MHz in one sweep. Ideal for Satellite service. The **SA1800B** has the same general specifications as the model SA1300A.

INTRODUCTORY OFFER

**SA1300A & OPT.s 1, 3, 6
ONLY \$1795.00** note 1

**SA1800B & OPT.s 1, 3, 6
ONLY \$2195.00** note 1
\$1995.00 Opt. 1, 6 ONLY

SA1300A	\$1595.00
SA1800B	\$1895.00
OPT. 1 50MHz MARKER	\$200.00
OPT. 3 +/- 5KHz Res B.W	\$350.00
OPT. 5 1000 MHz Tracking Generator	\$250.00
OPT. 6 7 Digit Center Frequency Display	\$300.00

Note 1: Introductory Price for limited time only.

TAKE ADVANTAGE

CALL 1-800-566-1818

To: Order - For Information & Special Intro. Offer
Terms MC, VISA, AE, Check, COD, PO (OAC), LC, Transfer

DISTRIBUTED BY: ADVANTAGE INSTRUMENTS CORP.

3276 KITCHEN DR. P.O. BOX 2152 CARSON CITY NV. 89702

1-800-566-1818 702-885-0234 FAX 702-885-7600

PRICES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE OR OBLIGATION. F.O.B. CARSON CITY NV. NV. RESIDENTS ADD SALES TAX.

CIRCLE 149 ON READER SERVICE CARD

LETTERS

Number 2 on your Feedback card

From the Ham Shack

Bill Haddad WD9HXH, Whiting IN
I wonder how many of the old geezers of our hobby really know how slow their CW communications is compared to modern technology. Perhaps I can get their attention with my own experience. Back in 1942 as a radio operator in the Navy Department in Washington, DC, my first assignment was to monitor the FOX broadcast. This was an 18 wpm CW broadcast to all ships at sea. This broadcast operated 24 hours a day, seven days a week.

I began to wonder how many words I would have sent at that speed in the 50-some years since leaving the Navy Department. I put this on my calculator and found that in 50 years I would have sent 473,364,000 words. At today's 155 megabits per second, all of those 50 years of sending could be transmitted in 3.38 minutes. Need I say more?

Paul A. Robertson N2XZF, Rochester NY [Letter to Steve Katz WB2WIK/6] With reference to your excellent article on building a half-gallon amplifier in the April 1994 issue of *73 Amateur Radio Today* (page 40), I would like to add a strong admonition about the insulation material used on the tube featured. The material is beryllium oxide, an extremely toxic substance if inhaled. It is benign if left undisturbed, but can cause problems if proper precautions are not observed. Possibly we are lulled into a sense of security by the appearance of this material because it looks like plain old ceramic. Not so!

The simple precautions are this: Do not abrade, fracture, or in any other way cause the material to become airborne. These precautions also apply to the insulation (ceramic) used on RF power transistors—you know, those ones that look like butterflies or helicopters.

Paul—Thanks for your nice letter. Yours was one of many letters I've received to date on this article, and the only one pointing out my oversight in not printing a warning regarding the hazards of contact with beryllium oxide, BeO.

You're absolutely right, BeO is horrible stuff. Fortunately, the tube itself doesn't use any (externally), it's only the thermal link which mounts between the tube and the heat sink that does. I did recommend that any potential user of a commercial RF deck get hold of a data sheet on the tube prior to doing anything, and if you look at the Eimac data sheet on the 8560A tube referenced and shown in my article, it is absolutely loaded with hazard warnings! Thankfully, the thermal link sold by Eimac to go with this family of conduction-cooled tubes has such a polished surface that it would be extremely difficult to come in contact with any BeO powder, which, as you know, is the real hazard. (The polished surface is stabilized and quite safe to handle.)

Another "fortunately" is: They've

now gotten away from BeO in favor of aluminum nitride, which is nearly thermally as conductive and is completely safe to handle in any form. I see that the industry trend is to avoid BeO whenever possible and use aluminum nitride for electrical isolation and thermal conduction. BeO is still used inside a lot of electronic power components, including tubes, but it's pretty safe inside there. . . . Steve WB2WIK

Gene WØGLI and XYL Della Twait, Cylinder IA Wayne, this is just a short note to tell you that my XYL and I enjoyed reading the "Never Say Die" column in the February '94 issue. We are both interested in electromedicine and magnetic therapy. A friend showed us some magnetic pads produced by a Japanese company called Nikken. My wife is a long-term asthma sufferer and has showed improvement since she started using it.

George Gray WB2CHP, Spring Valley NY Wayne, In your otherwise exciting (as usual) "Never Say Die" for May, you included a remark indicating that you have fallen for the propaganda of such outfits as "Handgun Control, Inc." regarding the National Rifle Association, and I would like to try to disabuse you on this. The NRA is not some nut outfit refusing to allow criminals (who will never be disarmed) to be disarmed, but several million citizens who refuse to allow victims to be disarmed. (Let's not pretend that these anti-gun groups only want to outlaw some nebulous, undefined "assault weapons" [If I attack you with a golf club, is that an assault weapon?], they admit their ultimate goal is to outlaw all firearms!)

Let's look at what a wonderful world we could have if the NRA's lobbying failed and these anti-gun nuts had their way. The Colombian drug cartels could expand into smuggling guns and ammunition (increased employment), we could have hundreds of thousands of bathtub (all right, garage) shotgun and ammo makers (big cottage industry), half a million ATF agents making raids similar to the ones in Tulsa or Waco (more increased employment plus a reduction of the surplus population). Every college student will have to carry a pistol in his hip pocket (remember Prohibition?), and organized crime will get another big boost. More increased employment!

Of course there is a downside. Massacres such as the LIRR shooting (notice how effective New York's gun laws are; no one else on the train was armed!) would become commonplace, armed robbery would become very commonplace, and we would become subject to coups by the armed forces any time they did not like the way the government was handling some specific problem. (No one would have the power to oppose them.)

So maybe the NRA's lobbying is

not having a bad effect on our quality of life, but is an attempt to keep it from deteriorating further!

George—I'm deeply disappointed in you. If you've been reading my editorials for any length of time you should know that I don't "fall" for any propaganda. I do my homework and think for myself. . . . even about guns.

George, there are nuts on both sides of the gun arguments. I believe I've read and heard all sides, to the extent that I haven't seen a new idea from either camp in a long time. It's the same old crap both ways.

You are probably 100% right. We should allow kids of any age to take guns to school and kill each other when they get mad . . . or even slightly irritated. Even assault guns. We can always have more kids, and teachers are cheap. That's the easy part. I doubt we'd have any problem keeping our population up, but even if we did see it dropping a bit illegal immigration would take up the slack, and that means still more gun customers and money for the industry.

The survival of the fittest is nature's way, right? If everyone on the LIRR train had been armed, the surviving passengers could have blasted the guy out of his shoes after he emptied his first clip. Of course, you might also blast the little old lady who pushes in first when the door opens and grabs the seat you were heading for. That'll teach her a lesson. Just blow away one of her knees so she won't be so damned fast next time.

So let's keep importing those assault rifles and cheap handguns. It'll make everyone a lot more polite. It'll also help the sale of bulletproof glass for cars.

George, my approach is every bit as reasonable as yours. America has the world's record for murder with guns and I say let's go for double or nothing. Cheers . . . Wayne

Al Margheim, Cumberland TX Wayne, I received the May 1994 issue of *73* on the same day I received my subscription renewal reminder for *73*. I was still considering whether to renew my subscription or not when I read your editorial. I noted with approval your comment on page 4 that you always do your homework before you write. Then I read your sarcastic comment on page 92 about the National Rifle Association, and you blew your credibility completely. Had you really done your homework on the National Rifle Association you would never have made such a statement.

I suppose your opinion of the NRA is based on what you've read or heard in the popular media, but you should know that the media often presents only one side of an issue. It is a fact that the media has been engaged in a smear campaign against the NRA for many years. Almost everything about the NRA in the major news publications and on TV is either incorrect or twisted in some way to make the NRA look bad. (I do not believe the NRA is beyond criticism; however, their lobbying efforts have benefited the citizens of the United States of America far more than any other organizations that I know of.)

I have a challenge for you. I've renewed my subscription for one year. In the next year I want you to tell us in

one of your editorials how the lobbying efforts of the NRA have damaged the quality of our lives. I expect you to make statements of fact, not opinion. If you won't address this in an editorial, then write me a personal letter. Then I'll write to you again and respond with facts refuting your statements. If you don't respond in some way, this will be my last year reading *73*.

If you are truly interested in doing your homework, I suggest you contact the National Rifle Association for their side of the story. I also strongly suggest you read *Point Blank: Guns and Violence in America* (Aldine, 1991) by Gary Kleck. Gary Kleck is a respected criminologist with Florida State University. His book was awarded the Hindelang Prize by the American Society of Criminology as the most important book written in the last three years. His studies show that America has benefited greatly from our system of firearms ownership.

If you care what the Constitution says, and what the authors of the Bill of Rights intended when they included the Second Amendment, you should also read the scholarly work *That Every Man Be Armed—The Evolution of a Constitutional Right* (The Independent Institute) by Stephen P. Halbrook.

Al—Here we are in an almost totally religious controversy and you are demanding facts? Having read all of the arguments on both sides, I can understand the people who believe that kids of six should be allowed to carry loaded guns to school; who believe that criminals are the problem, not guns. I can understand that they believe that kids should be able to take live hand grenades to school, and be allowed to handle deadly poisons and flame throwers.

After all, they say, don't we really have more population than the world can handle already? Darwin says it's the survival of the fittest, and we can see that our socialist namby-pamby government has gone to lengths to protect the unfittest. A few more guns, grenades, and assault weapons and some napalm in the right places might just be a good thing. Right? Once we all agree that everyone is entitled by the Constitution to carry arms anywhere they want, we are infringing on their rights if we want to prevent them from owning a tank or a dive bomber. Or an atom bomb, for that matter. It's a right, and never mind that this made sense a couple hundred years ago when it was written, but might just be a wee tad out of date now, considering technological advances in weaponry that were never imagined when our country was formed.

I guess it all depends on what kind of a society you prefer to live in. You want one where everyone is armed and ready to avenge any slight with any weapon on up to an atom bomb. And it makes wonderful TV shows. And it's all real.


So much for the religious part of our program. Now, I'm polishing up my Weatherby 300 and my Winchester 30-30 for some real action. Weatherby was a ham operator, by the way. I got my gun directly from him. I can whack a deer from 500 yards. Cheers . . . Wayne

You get more features for your dollar with the

REP-200 REPEATER

A fully microprocessor-controlled repeater with autopatch and many versatile dtmf control features at less than you might pay for a bare-bones repeater or controller alone!

Kit \$1095; w&t only \$1295!



- Available for the 143-174, 213-233, 420-475, 902-928 MHz bands.
- **FCC type accepted** for commercial service in 150 & 450 bands.
- **Six courtesy beep types**, including two pleasant multi-tone bursts.
- **Open or closed access autopatch**, toll-call restrict, auto-disconnect.
- **Reverse Autopatch**, two types.
- **DTMF CONTROL**: over 45 functions can be controlled by 4-digit dtmf command, via radio or telephone.
- **Owner can inhibit autopatch** or re-

peater, enable either open or closed access for repeater or autopatch, and enable toll calls, reverse patch, kerchunk filter, site alarm, aux rcvr.

- **Change** cw speed and tone, beep delay, tail timer, and courtesy beep type at any time by owner password protected dtmf commands.
- **Auxiliary receiver input** for control or cross linking repeaters.
- **Color coded LED status indicators.**



REP-200T Voice Message Repeater. As above, except includes Digital Voice Recorder. Allows message up to 20 sec. to be remotely recorded off the air and played back at user request by DTMF command, or as a periodical voice id, or both. **Kit \$1145, w&t only \$1395**



REP-200C Economy Repeater. Like REP-200, except uses COR-6 Controller (no DTMF control or autopatch). Features real-voice ID. **Kit only \$795, w&t \$1095**

REP-200N Repeater. Want to use your ACC controller, etc.? No problem! We'll make you a repeater with rf modules only. **Kit only \$695, w&t \$995**

XMTRS & RCVRs FOR REPEATERS, AUDIO & DIGITAL LINKS, TELEMETRY, ETC.

Also available in rf-tight enclosures, and with data modems.

FM EXCITERS: 2W continuous duty. TCXO & xtal oven options. **FCC type accepted for com'l high band & uhf.**

- **TA51:** 50-54, 143-174, 213-233 MHz. **Kit \$109, w&t \$189.**
- **TA451:** 420-475 MHz. **Kit \$109, w&t \$189.**
- **TA901:** 902-928 MHz. (0.5W out); w&t \$219.

VHF & UHF AMPLIFIERS.

For fm, ssb, atv. Output levels from 10W to 100W. Several models starting at \$99.



FM RECEIVERS:

- **R144/R220 FM RECEIVERS** for 143-174 or 213-233 MHz. Sensitive front end, 0.18uV, both crystal & ceramic if filters plus helical resonator front end for exceptional selectivity: >100dB at ± 12 kHz (best available anywhere!) Flutter-proof hysteresis squelch; **Kit \$149, w&t \$219.**
- **R451 FM RCVR**, for 420-475 MHz. Similar to above. **Kit \$149, w&t \$219.**
- **R901 FM RCVR**, for 902-928MHz. Triple-conversion, ...\$169, w&t \$249.

- **R76 ECONOMY FM RCVR** for 28-30, 50-54, 73-76, 143-174, 213-233 MHz, w/o helical res, if selectivity >100dB at ± 12 kHz. **Kits \$129, w&t \$219**

R76 MONITOR FM RCVR Kit for 10M, 6M, 73 MHz, 2M, hi-band, or 220 MHz. IF selectivity 60dB at ± 12 kHz. Great for monitoring repeaters, amateur calling frequencies, or packet radio frequencies, and for listening to commercial two-way radio, police/fire frequencies, or weather forecasts. **Good starter kit, too; easy to assemble and align. Kit only \$59!**

- **R137 WEATHER SATELLITE RCVR** for 137 MHz. Special if filters tailored for wideband fm. Lowest cost receiver available. **Kit only \$89, w&t \$149.**
- We also have preamps and receiving converters for 137 MHz, and we carry the *Weather Satellite Handbook* by Ralph Taggart.



ACCESSORIES

COR-3 REPEATER CONTROLLER. Features adjustable tail and time-out timers, solid-state relay, courtesy beep, and local speaker amplifier. **Kit \$49**

CWID. Diode programmable any time in the field, adjustable tone, speed, and timer. **Kit \$59**


COR-4. Complete COR and CWID all on one board. CMOS logic for low power consumption. EPROM programmed, specify call. **Kit \$99, w&t \$159**



COR-6. COR & Real Voice ID on one board. Digital ic records up to 20 seconds of your voice.

Can record multiple id messages. Tail and time-out timers, courtesy beep, solid-state relay to key transmitter. **Kit \$99, w&t \$149**

Versatile DVR-1 DIGITAL VOICE RECORDER Module. As a **voice ID'er** for repeaters, records your voice, using the built-in microphone or external mic. Just the thing for fox hunt xmr id! May also be used as a **contest caller** to play back one or more messages through your transmitter at the press of a switch. Used as a **radio notepad**, it can record the audio output of a receiver — up to 20 sec. of anything you might want to recall later.



Play back as often as you like through a small external speaker. Extensive manual tells how to use multiple messages and adapt to many applications. **Kit \$59, w&t \$99**

TD-4 SELECTIVE CALLING Module. Versatile dtmf controller with 1 latching output. Mutes speaker until someone calls by sending your 4-digit ic code. Or use it with a long ft zero digit to alert anyone in club. Also may be used to control autopatch or other single device. **Kit \$49, w&t \$79**

TD-2 DTMF DECODER/CONTROLLER. 16 digits, programmable, toll-call restrictor. Can turn 5 functions on/off. **Kit \$89, wired & tested \$149**

AP-3 AUTOPATCH. Use with TD-2 for repeater autopatch. Reverse patch and phone line remote control are std. **Kit \$89, wired & tested \$149**

AP-2 SIMPLEX AUTOPATCH Timing Board. Use with above for simplex operation using a transceiver. **Kit \$39**

TD-3 SUBAUDIBLE TONE DECODER/ENCODER. Adjustable for any tone. Especially for repeaters, with remote control activate/deactivate provisions. **Kit \$29, wired & tested \$59**

DATA MODEMS

MO-202 FSK DATA MODULATOR & DE-202 FSK DEMODULATOR. Run up to 1200 baud digital signals through any fm transmitter & receiver.

Radio-link computers, telemetry, etc. **Kit ea \$49, w&t ea \$79**


9600 BAUD DIGITAL RF LINKS. Low-cost packet networking system, consisting of MO-96 Modem and special versions of our 144, 220, or 450MHz FM Transmitters and Receivers. Interface directly with most TNC's. Fast, diode-switched PA's output 15 or 50W. **CALL.**

Low Cost GaAsFET PREAMPS

LNG-(*)

ONLY \$59

wired & tested



FEATURES:

- **Very low noise:** 0.7dB vhf, 0.8dB uhf
 - **High gain:** 13-20dB, depends on freq
 - **Wide dynamic range - resist overload**
 - **Stable:** low-feedback dual-gate FET
- *Specify tuning range: 28-30, 48-56, 137-152, 152-172, 210-230, 400-470, 800-960 MHz.



LNW-(*) MINATURE PREAMP

ONLY \$29 kit, \$44 wired & tested

- GaAs FET Preamp similar to LNG, except designed for **low cost & small size**. Only 5/8"W x 1-5/8"L x 3/4"H. Easily mounts in many radios.

*Specify tuning range: 25-35, 35-55, 55-90, 90-120, 120-150, 150-200, 200-270, 400-500 MHz.

LNS-(*) IN-LINE PREAMP



ONLY \$89 kit, \$119 wired & tested

- GaAs FET Preamp with features similar to LNG series, except **automatically switches out of line during transmit**. Use with base or mobile transceivers up to 25W. Tower mounting brackets incl.
- *Tuning range: 120-175, 200-240, or 400-500.

HELICAL RESONATOR PREAMPS

GaAs FET preamps

with helical resonators **reduce inter-mod & cross-band interference** in critical applications. **MODEL HRG-(*)**, \$80 vhf, \$110 uhf.

*Specify tuning range: 142-150, 150-162, 162-174, 213-233, 420-470.

RECEIVING CONVERTERS

Low noise converters to receive vhf and uhf bands on a 10M receiver.



- Input ranges avail: 50-52, 136-138, 144-146, 145-147, 146-148, 220-222, 222-224 MHz, 432-434, 435-437, 435.5-437.5, and 439.25 (to chan 3).
- **Kit less case \$49, kit w/case & BNC jacks \$74, w&t in case \$99.**

TRANSMITTING CONVERTERS



XV2 for vhf and XV4 for uhf. Models to convert 10M ssb, cw, fm, etc. to 2M, 220, 222, 432, 435, and atv. 1W output. **Kit only \$89.** PA's up to 45W available.

- Buy at low, factory-direct net prices and save!
- For complete info, call or write for free catalog. (Send \$2 for overseas air mail.)
- Order by mail, fax, or phone (9-12 AM, 1-5 PM eastern time).
- Min. \$5 S&H charge (fr first pound plus add'l weight & insurance).
- Use VISA, Mastercard, check, or UPS C.O.D.

hamtronics, inc.

65-D Moul Rd; Hilton NY 14468-9535
Phone 716-392-9430 (fax 9420)

Wayne Green: Coast-to-Coast

73 Publisher Wayne Green W2NSD/1 will be the featured guest on *Ham Radio & More*, a nationwide broadcast band talk show hosted by Len Winkler KB7LPW, on August 14, 1994.

The program is carried by 23 stations nationwide on the Talk America Network on Sundays at 6 p.m. EST. You can also listen in on satellite on Spacenet 3, transponder 9, 6.8 audio. For more information on stations carrying the program, contact flagship station KFNN at (602) 241-1510.

Entire ARRL Bio-Effects Committee Quits

The American Radio Relay League's Bio-Effects Committee has disbanded en masse. The handpicked group of internationally acknowledged experts in the field of potential health risks from exposure to RF radiation formally resigned in writing on June 1st.

In the letter of resignation, signed by all five members, chairman Ivan Shulman, M.D. WC2S wrote: "We will, however, not allow our names to be subject to the political machinations and narrow views of individuals who seek to use us for their own aims as 'window dressing' . . ."

The ARRL published an article in the April 1994 issue of *QST* by Wayne Overbeck N6NB which stated, "Fortunately, enough research has now been done that we know most amateur radio activities are quite safe." Meanwhile, the May issue of 73 carried actual Congressional testimony by former ARRL committee member Ross Adey, M.D., K6UI in an article called "The Radar Gun Reality." Dr. Adey stated that federal agencies " . . . should assume direct responsibility for developing and implementing urgently needed safety guidelines for RF/microwave exposures." He added that more research was desperately needed, especially in the athermal effects of radiation.

The ARRL Bio-Effects Committee was appointed in January 1990 by then ARRL President Larry Price W4RA " . . . with the distinctive charge of revitalizing organized amateur radio's concern for the limitation of bio-effects hazards that might arise from the participation of individuals in the hobby of amateur radio." *TNX W5YI Report, Issue #12, June 15, 1994; QST, April, 1994.*

FCC Can't Relax Anymore

The Federal Communications Commission has denied two Petitions for Reconsideration of its decision to relax restrictions on the scope of permissible communications in the Amateur Service. The commission amended its rules to allow licensees to use Amateur



Three National Capitol DX Assn. members collectively worked 665 countries in the NCDXA 12-month DX hunt. Pictured (L to R) are: Dave Hammond WC4B (201), Ken Miller K6IR (227), and ARRL Director John Kanode N4MM (237).

Service frequencies to facilitate events such as races and parades, to support educational activities, to provide personal communications such as making appointments and ordering food, to collect data for the National Weather Service, and to provide assistance voluntarily, even where there are other authorized radio services available.

David B. Popkin and Rolland D. Cummings filed petitions requesting further relaxation of the rules to permit the retransmission of time broadcasts originated by government stations. Popkin also asked the commission to permit the retransmission of other information originated by government stations, and to substitute the phrase "instructional activity" for the phrase "classroom instruction."

The FCC denied reconsideration, saying the petitioners had merely reiterated views already expressed in comments to the Notice of Proposed Rulemaking. *TNX Westlink Report, No. 673, June 6, 1994*

Majority Call Ham Radio Valuable

H.J. Res. 199, the Joint Resolution recognizing the Amateur Radio Service, now has a majority of the U.S. House of Representatives as cosponsors. On April 11th, four additions to the list of cosponsors brought the list total to 220 (of which three are non-voting delegates). The four are Rep. James Talent (R-MO), Del. Eleanor Holmes Norton (D-DC), Rep. Thomas Ridge (R-PA), and Rep. Don Young (R-AK).

The resolution seeks formal recognition of the value of amateur radio to the country. It would support amateur radio as "national policy." It would also encourage rules and regulations to facilitate amateur radio as a public benefit by encouraging new technologies. There are now 218 voting sponsors, including Resolution sponsor Jim Cooper (D-TN). There are currently 434 Representatives in the House. *TNX Westlink Report, No. 673, June 6, 1994.*

10 WPM Generals?

"Slow-code" is the name given to an Amateur Radio Industry Association proposal to lower the General Class code speed requirement to 10 words per minute. So far, it has gained far more support than criticism in ham radio circles. Most of the packet radio postings on slow-code praise the industry group's leadership. Some even say 10 WPM doesn't go far enough, with 5 WPM being suggested instead.

Slow-code is also getting support from users of various public bulletin boards. An unofficial poll being conducted by Newsline is so far five-to-one in favor of the Amateur Radio Industry Association's slow-code proposal.

The association has yet to announce a firm date for filing its slow-code rule making request before the FCC. *TNX Westlink Report, No. 673, June 6, 1994.*

Let Market Forces Decide

FCC Chairman Reed Hundt said his agency's goal in devising rules for auctioning the airwaves for new communications devices later this year is to let market forces decide who will conduct business profitably within that spectrum. Hundt said the commission will not limit the number of licenses that result from the bidding for that spectrum, nor will it prevent a licensee from piecing together spectrum to reach a big geographic area.

Speaking before the Harvard Business School Club of Greater New York, Hundt stressed the need for greater competition in telecommunications, at times defending the FCC's recent regulatory actions as laying groundwork for greater competition.

The FCC plans to auction spectrum for a new breed of wireless communications. This summer it will auction spectrum for narrowband wireless communications such as paging. Later this year it plans to auction spectrum for transmitting broadband wireless signals—from phone calls to video images. *TNX Westlink Report, No. 673, June 6, 1994.*



TNX . . .

. . . to all our contributors! You can reach us by phone at (603) 924-0058, or by mail at 73 Magazine, 70 Route 202 North, Peterborough, NH 03458. Or you can reach us on CompuServe ppn 70310,775@compuserve.com; or at the 73 BBS at (603) 924-9343 (300-2400 bps), 8 data bits, no parity, one-stop bit. News items that don't make it into 73 are often put in our other monthly publication, *Radio Fun*. You can also send news items by FAX at (603) 924-9327.

Data Controllers Put You In Control

- Dual simultaneous ports.
- Automatic signal identification.
- 9600 bps modem option available.
- 8-pole Chebyshev bandpass filter.
- Dual-port Gateway: Packet to AMTOR, Packet to PACTOR, and Packet to Packet.
- Twenty software selectable modems.
- 17K Packet, PACTOR, and AMTOR MailDrop.
- 16-level gray scale fax with opt. software.
- Same modes as the PK-232MBX.
- Full PACTOR Memory ARQ.

PK-900

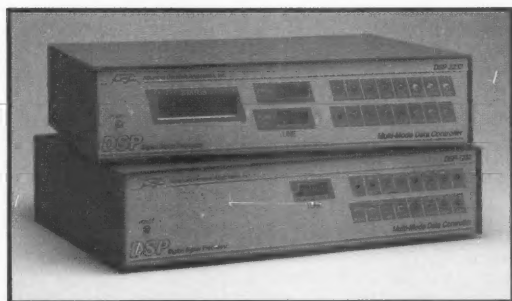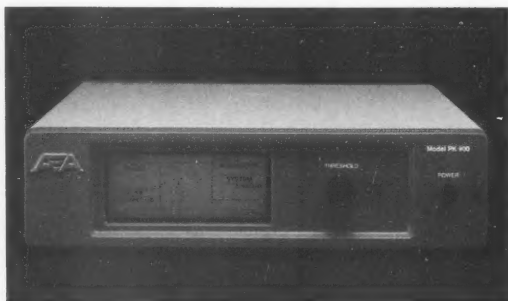

DSP-2232

DSP-1232

- DSP-1232 has two switchable ports.
- DSP-2232 has two simultaneous ports.
- Same modes as the PK-232MBX.
- Includes modems for satellite use.
- Automatic signal identification.
- 17K Packet, PACTOR, and AMTOR MailDrop.
- DSP-2232 has dual-port Gateway: Packet to AMTOR, Packet to PACTOR, & Packet to Packet.
- DSP-2232 features front panel LCD.
- Up/Down Doppler shift for PSK modems.
- 9600 bps modem included.

- Designed for multi-mode operation.
- Internal 1200 bps VHF modem.
- Automatic signal identification.
- 18K Packet, PACTOR, and AMTOR MailDrop.
- 2400 bps modem option.
- 8-pole Chebyshev bandpass filter.
- Modes: Morse code, Baudot, RTTY, ASCII, AMTOR/SITOR, PACTOR, VHF & HF packet, B&W fax receive/transmit, NAVTEX/AMTEX, and ARRL Information Services.
- Gateway as a node.

PK-232MBX



PK-12

PK-96

- PK-96 is a 9600 bps packet-only controller with 9600 bps K9NG and G3RUH compatible direct frequency modulation and 1200 bps VHF packet.
- PK-12 offers 1200 bps VHF packet at less than 80 mA of power.
- PK-96 features true DCD state machine for open squelch operation.
- 32K RAM, easily expandable to 128K.
- KISS mode for TCP/IP compatibility.
- Control of third-party MailDrop traffic.

Call (800) 432-8873 for a complete catalog or information on a specific product. Contact your favorite amateur radio equipment dealer for best pricing.

AEA
Connect with us

Advanced Electronic Applications, Inc.
2006 196th Street Southwest
P. O. Box C2160
Lynnwood, WA 98036
(206) 774-5554

Stand-Alone DDS

The Kendraboard provides PC-free frequency control.

by Bruce Hodgkinson VA3BH (ex-VE3JIL)

After I finished the Julieboard DDS synthesizer design (see "Julieboard: An easy-to-build DDS synthesizer for the PC printer port." in the August 1993 issue of *73 Amateur Radio Today*) and built some prototypes, I spent some time using the board and quickly concluded that, even though it worked well, the requirement for a PC was sometimes a problem. This opinion was confirmed overwhelmingly in the phone calls and letters I got from readers after the article came out—it became obvious that the next step would be a stand-alone controller. Here, I want to not only describe my design (the Kendraboard), but also give some hints and suggestions to help readers develop their own designs.

Why a Dedicated Controller?

When paired with a dedicated controller,

a DDS synthesizer can be used in a stand-alone configuration:

- No bulky PC needed.
- No time needed for boot-up.
- Extremely fast operation.
- Low power/small package (ideal for QRP).
- Much lower radiated digital noise.

As a self-contained digital tuning unit for home-brew gear, it is an ideal way to prototype design ideas and develop software for a future digital transceiver. Also, there are many other excellent CPU-controlled parts, such as D/A and A/D converters, PLLs, and displays which can be used with a controller to form a complete system.

Choosing the Right Microcontroller

There are many different types of computer chips (and systems) available on the market—the first design decision will be to pick one. It is tempting to choose a device because of cost or because there's lots on hand, but there are other considerations which are generally more important:

- Can it easily do the job?
- What development systems are available?

If the candidate will not work, or is only marginally capable of doing the job, it is not suitable even if free. Future needs should be considered to avoid hardware/software obsolescence and to allow for new features. For example, I chose the Motorola MC68HC705C8 largely because of its serial and SPI ports. Even though the present software does not use these functions, future versions will, and I will be able to use the existing hardware as is. Next, the availability of development systems (especially affordable ones!) should be considered—if you can't get the code into it, that otherwise-perfect processor is worthless.

Development Systems

Unlike a PC, a single-chip microcontroller usually does not have an operating system resident on it. This can make code development a bit tricky without the proper tools. The development process requires the designer to:

- Write the code.
- Assemble or compile into machine code.
- Get the machine code into the device.
- Test the device in its intended place.
- Find any bugs.
- Rewrite the code as required.



Photo A. Kendra and her board. (Photo by Sandy VE3AAC.)

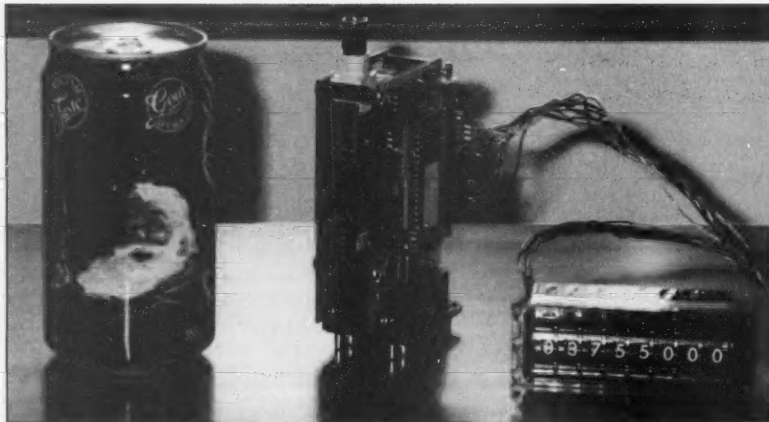


Photo B. Two boards make stand-alone DDS. (Photo by Sandy VE3AAC.)

MFJ-949E Deluxe 300 Watt Tuner

**More hams use MFJ-949's than any other tuner in the world!
Why settle for an imitation when you can have the real thing?**

**In Stock at ham dealers
everywhere!**

**Pick one up at your favorite dealer --
no shipping, no waiting, no hassles**

MFJ-949E
\$139⁹⁵

**Call your dealer for your best price
Includes FREE AC adapter
for meter light**

**More hams use MFJ-949's than any
other antenna tuner in the world!**

Why? Because the world's leading tuner has earned a worldwide reputation for being able to match just about anything.

MFJ-949's have been highly refined and have years of proven reliability -- all from the world's most trusted name in antenna tuners.

Now the latest MFJ-949E gives you even more features and more value than ever at a new lower price.

Every MFJ-949E comes with ... proven reliability ... MFJ's famous one year **No Matter What**™ unconditional guarantee ... first-rate performance ... unbeatable quality. Plus, you get the very best tuner value in ham radio.

Why take chances with an imitation when you can have the *real thing* from the world's most trusted name in antenna tuners.

More reasons why more hams use MFJ-949's than any other antenna tuner in the world ...

Full 1.8-30 MHz Operation

1000 volt tuning capacitors, extra heavy duty inductor switch, Teflon® insulating washers and proper L/C ratio gives you arc-free no worries operation.

You can tune any transceiver, transmitter or receiver with up to 300 watts of RF power from 1.8 to 30 MHz.

Lighted Cross-Needle Meter

MFJ's lighted Cross-Needle Meter shows you SWR, forward and reflected power *simultaneously*. It reads both *peak* and average power on 300 or 30 watt ranges.

The meter is illuminated for easy reading in dim light and has an ON/OFF lamp switch. The meter lamp uses 12 VDC or 110 VAC. A free AC adapter is included at no extra cost.

Tunes any Antenna

The MFJ-949E tunes out SWR on dipoles, verticals, inverted vees, random wires, beams, mobile whips, shortwave receiving antennas ... nearly anything!

Use coax feed, random wire or balanced lines. Has oversized *heavy duty* 4:1 balun.

Super Antenna Switch

MFJ's 8 position *super* antenna switch

lets you select two coax fed antennas, random wire/balanced line or built-in dummy load for use through your MFJ-949E or direct to your transceiver.

MFJ's Cross-Needle SWR/Wattmeter is always active for monitoring forward and reflected power and SWR.

QRM-Free PreTune™

MFJ's **QRM-Free PreTune™** lets you pre-tune your MFJ-949E off-the-air into a built-in dummy load without causing QRM. Pre-tuning into a dummy load makes

longer lasting finish anywhere.

Detailed logging scales and legends are *permanently* silk screened on a real aluminum front panel and back panel -- it's not merely a plastic decal or glued-on paper strip that can peel off.

Superior construction -- MFJ-949Es use Teflon® insulating washers, counter sunk screws for meter bracket, *real* binding posts, wing-nut for ground post.

No Matter What™ Guarantee

Every MFJ-949E is backed by MFJ's famous one year **No Matter What™** unconditional guarantee. That means we will repair or replace your MFJ-949E (at our option) *no matter what* for a full year.

Others may give you a *limited* warranty on defects in material and workmanship.

But what do you do if it burns up and they say, "Sorry, your *limited* warranty does not cover that?"

Continuing Service

Only MFJ gives you a *direct* toll-free technical help line -- not merely a sales line. It's answered by *electronic technicians* who are experts in antenna tuners. We're here to help keep your MFJ product performing flawlessly -- no matter how long you own it.

Just call our toll-free 800-647-TECH (8324) -- no other tuner manufacturer gives you a *direct* toll-free help line.

Call your dealer for your best price

In stock at ham dealers everywhere!

Order your MFJ-949E today or simply pick one up at your favorite dealer or hamfest -- no shipping, no waiting, no hassles.

Free MFJ Catalog

Write or call toll-free ... 800-647-1800

Nearest Dealer/Orders: 800-647-1800

24 Hour FAX: (601) 323-6551

Technical Help: 800-647-TECH (8324)

MFJ ENTERPRISES, INC.
P. O. Box 494, Miss. State, MS 39762
(601) 323-5869; 8-4:30 CST Mon.-Fri.
76206.1763@compuserve.com

MFJ ... making quality affordable

Prices and specifications subject to change without notice. © 1994 MFJ Enterprises, Inc.



Why take chances?

**Why take chances with an imitation
when you can have the real thing from
the most trusted name in antenna tuners?**

tuning your actual antenna faster and easier.

Full Size Dummy Load

MFJ's 300 watt 50 ohm dummy load makes tuning up your transceiver and pre-tuning your antenna easy. It reduces needless QRM and saves your finals.

You'll find it handy for testing and repairing your rig, setting power level, adjusting your mic gain and more.

The MFJ-949E has a *full size* non-inductive dummy load measuring 3/4 inch diameter by 5 inches. It *easily* handles 300 watts of abusive tune-up power.

Watchout for cheap midget size dummy loads that change resistance as it heats up -- marginal ones could burn up your rig.

Custom Inductor Switch


The inductor switch is the most likely component to burn up in *any* antenna tuner.

The inductor switch in the MFJ-949E was *custom* designed to withstand the extremely high RF voltages and currents that are developed in your tuner -- it's not a flimsy *plastic* switch made for small signals and wired with *tiny* gauge wire.

Unbeatable Quality

... built to last

Each MFJ-949E cabinet is chemically treated and has a new tough scratch-proof vinyl cladding -- not paint that can scratch or chip off. You won't find a tougher,

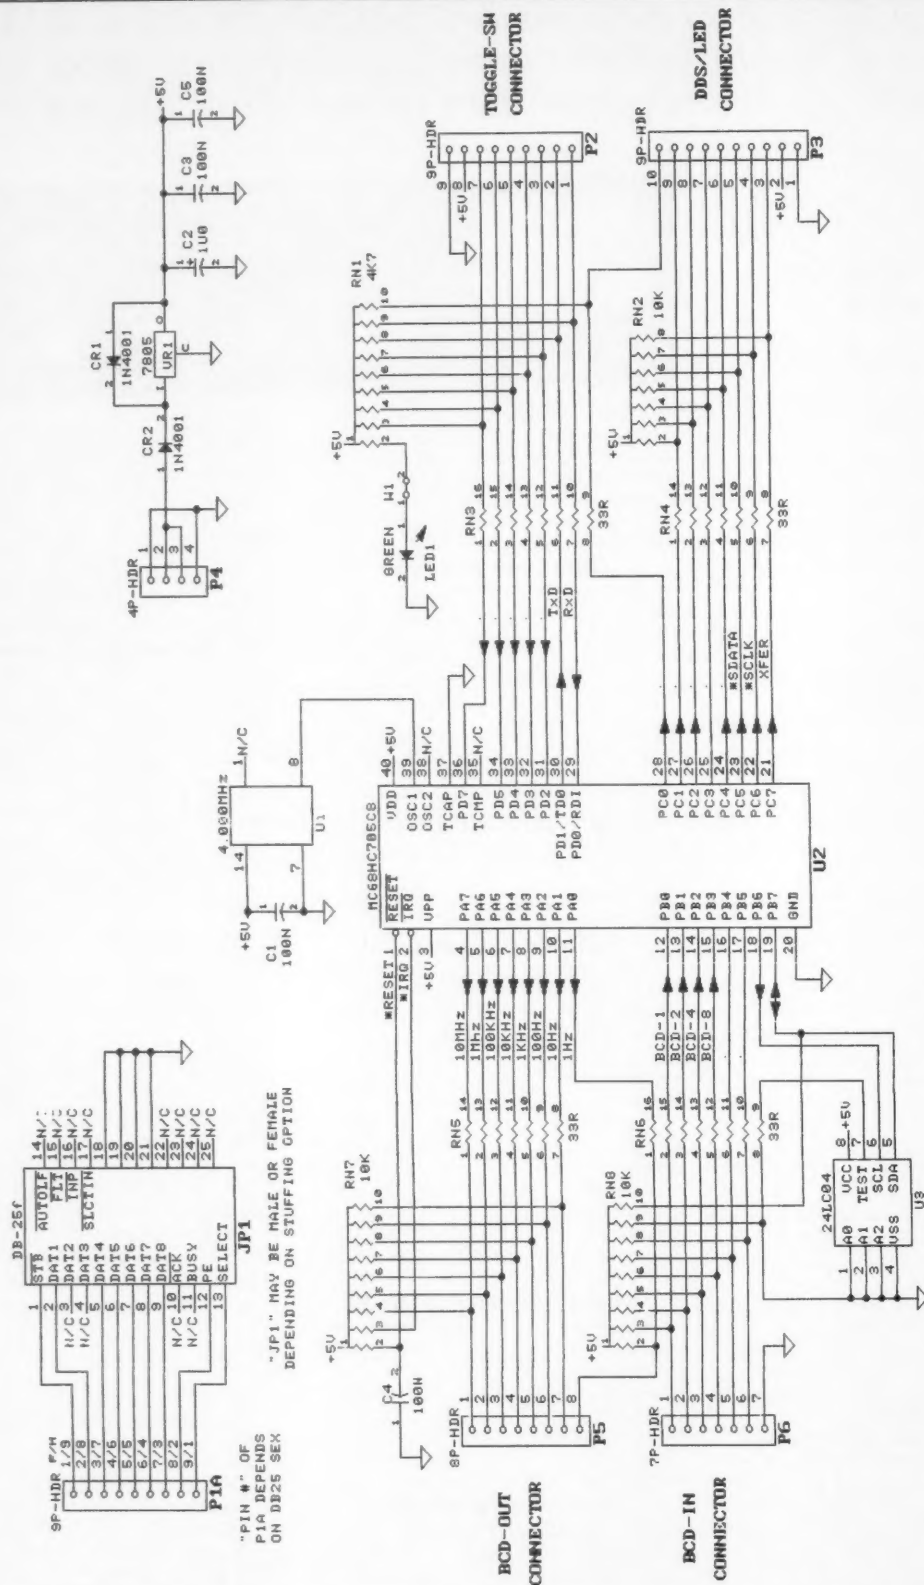



MODEL VS-50M

ASTRON POWER SUPPLIES

• HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •

SPECIAL FEATURES

- SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output
- CROWBAR OVER VOLTAGE PROTECTION on all Models except RS-3A, RS-4A, RS-5A, RS-4L, RS-5L
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage
- HEAVY DUTY HEAT SINK • CHASSIS MOUNT FUSE
- THREE CONDUCTOR POWER CORD except for RS-3A
- ONE YEAR WARRANTY • MADE IN U.S.A.

PERFORMANCE SPECIFICATIONS

- INPUT VOLTAGE: 105-125 VAC
- OUTPUT VOLTAGE: 13.8 VDC \pm 0.05 volts (Internally Adjustable: 11-15 VDC)
- RIPPLE Less than 5mv peak to peak (full load & low line)
- All units available in 220 VAC input voltage (except for SL-11A)

SL SERIES



• LOW PROFILE POWER SUPPLY

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
SL-11A	• •	7	11	2 1/2 x 7 x 9 1/4	12
SL-11R	• •	7	11	2 1/2 x 7 x 9 1/4	12
SL-11S	• •	7	11	2 1/2 x 7 x 9 1/4	12
SL-11R-RA	• •	7	11	4 1/4 x 7 x 9 1/4	13

RS-L SERIES



• POWER SUPPLIES WITH BUILT IN CIGARETTE LIGHTER RECEPTACLE

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-4L	3	4	3 1/2 x 6 1/2 x 7 1/4	6
RS-5L	4	5	3 1/2 x 6 1/2 x 7 1/4	7

RM SERIES



MODEL RM-35M

• 19" RACK MOUNT POWER SUPPLIES

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RM-12A	9	12	5 1/4 x 19 x 8 1/4	16
RM-35A	25	35	5 1/4 x 19 x 12 1/2	38
RM-50A	37	50	5 1/4 x 19 x 12 1/2	50
RM-60A	50	55	7 x 19 x 12 1/2	60

• Separate Volt and Amp Meters

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RM-12M	9	12	5 1/4 x 19 x 8 1/4	16
RM-35M	25	35	5 1/4 x 19 x 12 1/2	38
RM-50M	37	50	5 1/4 x 19 x 12 1/2	50
RM-60M	50	55	7 x 19 x 12 1/2	60

RS-A SERIES



MODEL RS-7A

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-3A	• •	2.5	3	3 x 4 x 5 1/4	4
RS-4A	• •	3	4	3 1/4 x 6 1/2 x 9	5
RS-5A	• •	4	5	3 1/2 x 6 1/2 x 7 1/4	7
RS-7A	• •	5	7	3 1/4 x 6 1/2 x 9	9
RS-7B	• •	5	7	4 x 7 1/2 x 10 1/4	10
RS-10A	• •	7.5	10	4 x 7 1/2 x 10 1/4	11
RS-12A	• •	9	12	4 1/2 x 8 x 9	13
RS-12B	• •	9	12	4 x 7 1/2 x 10 1/4	13
RS-20A	• •	16	20	5 x 9 x 10 1/2	18
RS-35A	• •	25	35	5 x 11 x 11	27
RS-50A	• •	37	50	6 x 13 1/4 x 11	46
RS-70A	• •	57	70	6 x 13 1/4 x 12 1/2	48

RS-M SERIES



MODEL RS-35M

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
• Switchable volt and Amp meter RS-12M	9	12	4 1/2 x 8 x 9	13
• Separate volt and Amp meters RS-20M	16	20	5 x 9 x 10 1/2	18
RS-35M	25	35	5 x 11 x 11	27
RS-50M	37	50	6 x 13 1/4 x 11	46
RS-70M	57	70	6 x 13 1/4 x 12 1/2	48

VS-M AND VRM-M SERIES



MODEL VS-35M

• Separate Volt and Amp Meters • Output Voltage adjustable from 2-15 volts • Current limit adjustable from 1.5 amps to Full Load

MODEL	Continuous Duty (Amps)			ICS* (Amps) @13.8V	Size (IN) H x W x D	Shipping Wt. (lbs.)
	@13.8VDC	@10VDC	@5VDC			
VS-12M	9	5	2	12	4½ x 8 x 9	13
VS-20M	16	9	4	20	5 x 9 x 10½	20
VS-35M	25	15	7	35	5 x 11 x 11	29
VS-50M	37	22	10	50	6 x 13¼ x 11	46

• Variable rack mount power supplies

VRM-35M	25	15	7	35	5¼ × 19 × 12½	38
VRM-50M	37	22	10	50	5¼ × 19 × 12½	50

RS-S SERIES



MODEL RS-12S

• Built in speaker

MODEL	Colors Gray Black	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H x W x D	Shipping Wt. (lbs.)
RS-7S	• •	5	7	4 x 7 1/2 x 10 1/4	10
RS-10S	• •	7.5	10	4 x 7 1/2 x 10 1/4	12
RS-12S	• •	9	12	4 1/2 x 8 x 9	13
RS-20S	• •	16	20	5 x 9 x 10 1/2	18
SL-11S	• •	7	11	2 1/2 x 7 x 9 1/4	12

The best approach is to get an evaluator board and development software which allows the user to write the program in whatever language is convenient, translate it into machine code, and transfer it into an emulator system which mimics the intended device. With this scheme, the developer can write a bit of code, try it out, and confirm that the routine works as intended by looking at internal memory and registers. It is possible to write the code blind, manually transfer it into an EPROM, then into the device via bootstrap mode, but that makes debugging very difficult—much like building a mechanical machine, welding the covers on, then trying to figure out its behavior by whether the wheels turn!

Fortunately, vendors such as Motorola make available freeware assemblers which take the English-language source code, convert it into the machine-readable object code, and put it into file transfer formats suitable for downloading. (Motorola uses the "S19" format.)

Also, Motorola markets low-cost evaluation and programmer boards—these can be used to emulate and program single-chip micros. With the "M68HC05PGMR" board, for example, small programs can be downloaded into the 'C8 device's internal RAM and executed without having to program the on-chip EPROM. Once the routine is verified, it may be programmed (by the same board) into the MCU and used as a building block by other routines. With careful strategy, quite a long program can be developed chunk-by-chunk without needing fancy tools. My programmer board (bundled with some pretty good software) cost me about \$68.05 (US) three years ago and I believe it is still available.

Ask around at the computer club or local college and look in the ads in magazines such as *Midnight Engineering* and *Circuit Cellar* for possible development board candidates. If the price for a good system is too steep (they can run a couple of hundred dollars) for one budget, consider finding a buddy (or buddies) to split the cost with. Not only do you get access to a system at less cost, but if you share your experiences, it makes the learning curve a lot easier!

Hardware Description

The circuitry for the Kendraboard fits on a small single-layer 2.5" x 4.5" printed circuit board (same size and shape as the Julieboard). It is a very low-tech board which is well within the fabrication abilities of the average ham. I made mine using an "ironed-on" reversed-image photocopy as an etch resist! My design objectives were simple: lowest possible density for ease of home fabrication, mechanically compatible with the Julieboard, and capable of future expansion with the existing design.

"If the price for a good system is too steep (they can run a couple of hundred dollars) for one budget, consider finding a buddy (or buddies) to split the cost with."

Board logic is very simple; it consists of a Motorola MC68HC705C8 single-chip microcomputer (MCU) and its support circuitry. The micro itself provides all operational functions, except for master clock generation. (It was easier to fit in a small clock oscillator module than the discrete oscillator components and I didn't want to spend a lot of time making them fit.) The 'C8 was chosen because an MC68HC05EVM evaluation board was on hand and the chip features:

- 7.7K bytes EPROM (or OTP).
- 176 bytes RAM.
- 24 bidirectional TTL I/O lines.
- 7 input/special purpose TTL lines.
- Serial (ASCII) communications interface.
- Serial (binary) peripheral interface.
- Easy-to-use 40-pin DIP package.

This device is considerably more powerful than what this application actually requires, but I wanted to provide for future growth.

The series resistors are used as a buffer between the "outside world" and the MCU for ESD and as an aid to EMI suppression. The pullup resistors are needed to define input levels for idle I/O pins (this is impor-

tant for CMOS devices such as the 'C8).

All I/O connectors, except for one, a male or female DB25, are 0.100 friction-lock SIPs and are intended to be used with matching housings loaded with crimp terminals. The DB25 can be wire-wrapped for plug-in compatibility with the Julieboard, either via a DB25/ribbon cable "backplane" as a female, or directly to the Julieboard DB25 as a male. The serial EPROM is a future item for when I want to do nonvolatile channel storage and clock frequency error calibration. Presently, the software does not support the EEPROM, so it may be left out, if desired.

Like the Julieboard, supply voltage input can range from about +7VDC to +12VDC, and is protected against reverse-polarity damage.

Software Description

In order to simplify the software as much as possible for the initial version, BCD thumbwheel switches were used for frequency control and display. (A keypad and LCD display could have been implemented, but the software required would have been much more complicated.) To drive the DDS, the software must perform these functions:

- Set up the microcomputer internal registers.
- Read the thumbwheel switches digit by digit.
- Do a BCD-to-binary conversion.
- Send the binary data to the DDS chip.

Set Up the Micro: The I/O lines used for the BCD digit "commons" and DDS control are set up as outputs, while the BCD read-back lines are set up as inputs. Unused I/O lines are configured as inputs and are pulled HIGH by the board pull-up resistors. Other processor functions (SPI, SCI, timer, etc.) are not presently used, but will be used in the future. At that time, code will have to be added to initialize these items. Once the micro has been initialized, control passes to the BCD thumbwheel switch read-routine.

Reading the BCD Thumbwheel Switches: Each BCD switch consists of a COM terminal and four output bits which are connected/disconnected to the COM terminal, depending on code. The required switch function is:

Code:	8	4	2	1
0	off	off	off	off
1	off	off	off	on
2	off	off	on	off
3	off	off	on	on
4	off	on	off	off
5	off	on	off	on
6	off	on	on	off
7	off	on	on	on
8	on	off	off	off
9	on	off	off	on

The output bits are paralleled via diodes: The cathodes go to the individual 8-4-2-1

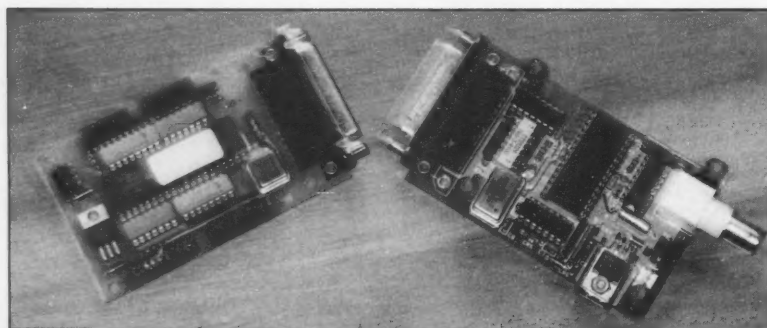


Photo C. Kendraboard and Julieboard. (Photo by Sandy VE3AAC.)

A NEW CONCEPT IN HF TRANSCEIVER DESIGN FROM A NEW COMPANY



Patent
Pending

\$995⁰⁰
**INTRODUCTORY
PRICE**

(Keyboard Not
Included)

Patcomm Corporation™ introduces the PC-1610™ a full featured HF transceiver with built-in keyboard interface. Plug a standard IBM XT* compatible keyboard into a PC-1610 and instantly enjoy keyboard CW, RTTY (BAUDOT and ASCII) data communications. Incoming morse & RTTY data is decoded and displayed on the built-in LCD display. The PC-1610 offers the following features:

- Built-in XT keyboard interface (keyboard optional)
- 160-10M ham band coverage
- USB/LSB/CW/FSK modes
- 75W output power
- Built in digital power/SWR meter
- DDS VFO with 1Hz step size
- Selectable variable speed/fixed 10Hz step VFO tuning
- Built-in 24hr clock
- 90 tunable memories
- 1 scratchpad memory
- 9 (256 character) keyboard data buffers
- Built-in 5-75 wpm IAMBIC keyer
- Built-in 2.4KHz, 1.8KHz, 500Hz, 200 Hz & RTTY filters
- Notch filter
- Select 1 of 3 antennas from front panel

Specifications are subject to change without notice.

* IBM XT is a registered trademark of the IBM Corporation.

- Basic display lets you know exactly where you are.

14.03510-T 0930
14.03510-R 0000

- Standard Display shows RX/TX VFO freq's, time and current memory

- Send & Receive in:
CW / RTTY(BAUDOT) / ASCII

TMX FER QSO, 73

- ← Incoming data
- ← Outgoing data appears here

- Store up to nine 256 character messages.

14.03510-T 0930
3> CANNED MSG ■

- Messages can be: edited, sent & appended to outgoing message

- ← Format & Edit stored MSG's here

PC-1610 = HF XCVR + PC

- The PC-1610 Performs the functions of an HF Transceiver, Computer, Data Controller and Control Software all in one package.

DATA CNTRLR



**The PC-1610 has too many features to adequately describe in one ad...
call or write for a detailed brochure—Major Credit Cards Accepted.**

patcomm
corporate

Designed and manufactured in the U.S.A.
Phone: (516) 862-6512 ■ Fax: (516) 862-6529
7 Flowerfield M100, St. James NY 11780

CIRCLE 321 ON READER SERVICE CARD

switch outputs and the anodes go to the common 8-4-2-1 bus (which goes to the MCU for readback.) This configuration has the ON bits for a given digit pulling LOW during readback, with the OFF digits staying HIGH. (Yes, this means 32 diodes for a full eight-digit interface! Look for switches with provision for on-board diode mounting—they do exist.) The COM line for each digit is connected to a unique microcontroller output line which is driven LOW by the processor while that digit is being read. After a digit is read, its value is placed in a memory location reserved for that value, to be used by the BCD-to-binary conversion routine. Once all eight lines have been read (and the eight memory locations filled by switch values), the routine passes control to the BCD-to-binary conversion routine.

BCD-to-Binary Conversion: At first glance, this appears to be a complicated function with lots of floating point math, but it's actually a very simple routine. What I did was to work out a binary weighting constant for each BCD digit, then accumulate (add to a running total) it a number of times equal to the value of that digit. For example, suppose that I have dialed up "03755200," which corresponds to 3.7552 MHz:

First, I clear a binary register then, one-by-one, I examine each BCD digit and accumulate its binary constant that number of times:

- 0—add the 10 MHz constant 0 times
- 3—add the 1 MHz constant 3 times
- 7—add the 100 kHz constant 7 times
- 5—add the 10 kHz constant 5 times
- 5—add the 1 kHz constant 5 times
- 2—add the 100 Hz constant 2 times
- 0—add the 10 Hz constant 0 times
- 0—add the 1 Hz constant 0 times

This accomplishes the conversion simply by doing a trivial binary calculation many times. In the worst possible case, 99.999999 MHz, only 72 accumulates of weighting constants need be done, so this routine is fast.

Since the DDS binary register size is 32 bits, this would suggest that weighting constants should be 32 bits each. Initially, I used 32-bit values for the weighting constants, but found that 70-odd repeated calculations could cause what I considered to be an excessive amount of round-off error. I then redefined each constant as being 40 bits—32 bits whole and 8 bits fractional—accumulated them to a 40-bit register, and took the upper (non-fractional) 32 bits as the binary result, discarding the 8 bits fractional remainder.

I am now happy with the results of the improved algorithm. Another nice thing about this scheme is that it can be used to do any other channel-to-DDS-binary conversion just by using a different initial value (not necessarily zero) and re-doing the weighting constants for each pro-

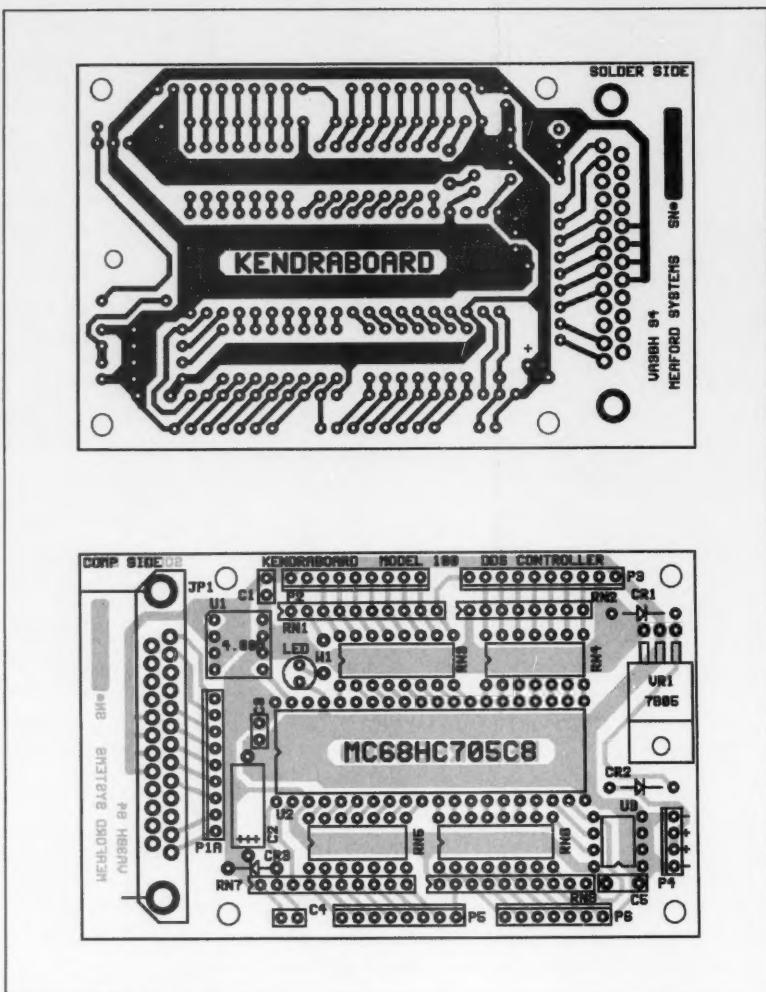


Figure 2. PCB layout.

grammable digit. For this design, using a Julieboard with 40 MHz clock, the weighting constants are:

- 10 MHz: 4000000000
- 1 MHz: 0666666667
- 100 kHz: 00A3D70A3E
- 10 kHz: 0010624DD3
- 1 kHz: 0001A36E2E
- 100 Hz: 000029F16B
- 10 Hz: 00000431BF
- 1 Hz: 0000006B61

Send Binary to the DDS Chip: This is a simple routine: Shift 32 data bits into the DDS, then pulse the *XFER line to capture the new frequency value. Once this has been done, the micro goes back to "Reading the BCD Thumbwheel Switches" and the cycle endlessly repeats. Cycle time is quite fast: The loop time is about 6mS—constant response as far as human perception is concerned.

The machine language listing is shown

in Figure 4. This is a modified Motorola ".S19" file with spaces added to separate address, code, and formatting fields. The first column, "Sxxx . . ." is a formatting field used to show the beginning of each file line. The next field represents the start address for each block of binary data. The third field (in bold) shows the actual code/data as burned into the EPROM.

The first block is data placed in EPROM addresses \$0100-0216. This code can be translated by hand (albeit tediously) back into the original assembler format to show what the program does, in a human-readable form. The last 2-byte "block" of data which is placed in the RESET vector at \$1FFE-1FFF to tell the computer the starting address upon power-up.

Continued on page 18



BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT # 707 RIVERTON NJ

POSTAGE WILL BE PAID BY ADDRESSEE

**73 Amateur
Radio Today**

PO BOX 7693
RIVERTON NJ 08077-8793

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



Place
Stamp
Here

**73 Amateur
Radio Today**

EDITORIAL OFFICE
70 ROUTE 202 NORTH
PETERBOROUGH, NH 03458-1107



☐ **YES! I want to grow with**
73 Amateur Radio Today.

73 Amateur Radio Today

SPECIAL "UNPLUGGED" ISSUE

Surplus Solar Panels
Batteries for Your Shack
Easy Solar Control Circuit

73 Reviews
Buyers' Guides
Technical Q&A



Send me 1 year (12 issues in all) of 73 for the low price of \$19.97! (Save over \$15.00 off the cover price). Mail this postage paid card today. For instant service dial toll free: 800-289-0388.

Name (please print) _____ Call _____

Address _____

City _____ State _____ Zip _____

☐ Payment enclosed

☐ Bill me

Charge my: ☐ MC ☐ VISA ☐ AMEX

Card Number _____ Exp. date _____

Newstand rate \$35.40. Basic subscription rate \$24.97 (Canadian orders add \$7.00 per year plus \$1.40 GST; other foreign countries add \$19.00 per year for surface mail, \$42.00 per year for airmail. Please allow 4-6 weeks for delivery of first issue.

B940BS84

The Pitch: 73 wants to know what you want to read. Help us by voting on this month's features and columns—you'll find their numbers in the Feedback box on the page preceding this card.

The Payoff: Each month we'll draw a card at random. If yours is picked, you'll receive a one-year subscription (or extension) to 73.

FEEDBACK

Article #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
Great																									
OK																									
No Way																									
Article #	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
Great																									
OK																									
No Way																									

I'd like to see more _____

I'd like to see less _____

Name (Please Print) _____ Call _____

Address _____

City _____ State _____ Zip _____

☐ Please enter my one year subscription to 73 for the low price of \$19.97 (Save 43% off the newsstand price). Mail this form or call toll free 1-800-289-0388.

☐ Payment enclosed

☐ Bill me

Charge my: ☐ MC

☐ VISA

☐ AMEX

Card Number _____ Exp. Date _____

B940FS85

FEEDBACK

In our continuing effort to present the best in amateur radio features and columns, we recognize the need to go directly to the source—you, the reader. Articles and columns are assigned feedback numbers, which appear on each article/column and are also listed here. These numbers correspond to those on the feedback card opposite this page. On the card, please check the box which honestly represents your opinion of each article or column.

Do we really read the feedback cards? You bet! The results are tabulated each month, and the editors take a good, hard look at what you do and don't like. To show our appreciation, we draw one feedback card each month and award the lucky winner a free one-year subscription (or extension) to 73.

To save on postage, why not fill out the Product Report card and the Feedback card and put them in an envelope? Toss in a damning or praising letter to the editor while you're at it. All for the low, low price of 29 cents!

- 1 Never Say Die
- 2 Letters
- 3 QRX
- 4 Stand-Alone DDS
- 5 Review: Azden PCS-7500H
- 6 Novel Dual-Band, Single Feedline, VHF/UHF Antenna
- 7 Design and Build a Dummy Antenna
- 8 Review: Drake SW8
- 9 Review: JPS Communications' NRF-7
- 10 The Coleman (Mini)-Kilowatt
- 11 Hamsats
- 12 RTTY Loop
- 13 QRP
- 14 Carr's Corner
- 15 Mini-Joystick Scanning
- 16 Hams with Class
- 17 Packet & Computers
- 18 Homing In
- 19 Ham Help
- 20 Above and Beyond
- 21 Ask Kaboom
- 22 Dealer Directory
- 23 Updates
- 24 73 International
- 25 Special Events
- 26 Barter 'n' Buy
- 27 New Products
- 28 Random Output
- 29 Propagation

The FLYTECRAFT™ SFX Monoband Vertical HF Antennas
The ideal antennas where height and space are critical factors! **Now Rated 1500 W** and featuring a new heavy-duty metal base!

- 8 unique models for 80, 40, 30, 20, 17, 15, 12 & 10 meters. Each only 9 ft. tall (10 meter is slightly shorter.)
- Precision-wound full length helix gives excellent performance.
- Unobtrusive — perfect for antenna-restricted areas.
- Instant set-up and tear down or leave up permanently.
- Top whip adjusts for low SWR point.
- Uses 2 shortened tuned radials with FLYTECRAFT™ RADIALCOILS™ (10M uses 3).

Built with pride & sold worldwide ~ FLYTECRAFT™ USA

SFX 80 — \$99.95 40, 30, 20, 17, 15, 12 — \$89.95 ea.
10 — \$79.95 S/H CanUS — \$7.50 (80, 40, 30M); \$6.50 (20-10M)

Satisfaction Guaranteed
VISA/MC PHONE ORDERS
800-456-1273
M-F 9A-5P (PT) 805-583-8173

Send Check/\$ Order to:
FLYTECRAFT™
P.O. Box 3141
Simi Valley
CA 93093

CIRCLE 118 ON READER SERVICE CARD

NEW!!! COLOR SLOW SCAN TV for the Sound Blaster!

Now send and receive Slow Scan TV with your Sound Blaster compatible sound card in FULL COLOR!!!
ONLY \$99.95

SLOW SCAN II
Now copy Slow Scan TV (in B&W), with your Sound Blaster compatible sound card. Re-send pictures that you receive! Save as .PCX or .VOC files.
IT'S FUN!!!
ONLY \$40.00

AUDIO ANALYZER
Analyze those audio signals that you hear, such as SSTV, RTTY, AMTOR, and Packet radio... Copy live or from a .VOC file.
ONLY \$39.95

Requires PC, VGA 640 x 480 - 256 colors, and Sound Blaster comp. card.
Shipping \$5 - Overseas \$10 - Illinois residents add 6.25% tax

Harlan Technologies 815-398-2683
5931 Alma Dr. - Rockford, Illinois 61108

CIRCLE 187 ON READER SERVICE CARD

JADE PRODUCTS, INC.

PUTTING THE AMATEUR BACK IN RADIO
FUN-KIT LINE
NEW! LADDER-LINE "WINDOW" ANTENNA

ALL HF AMATEUR BANDS INCL. WARC BANDS. 134' LONG. COMES WITH 50' FEED-LINE, 4:1 BALUN.

KITS: BATTERY CONTROLLERS
"SMART" SOLAR CONTROLLERS
EXPERTISER'S KITS
CURTIS KEYSER KIT

ANTENNAS: 80, 160 M LADDER-LINE MARCONI
LADDER-LINE MULTIBAND DIPOLE
LADDER-LINE "JADE" POLE

COMPONENTS: UC3908 BATTERY CHARGER CHIP
8044ABM CURTIS KEYSER CHIP, LM338K,
LM350K, MC3423P1, NE804AN, AND MORE

P.O. Box 368 E. HAMPSTEAD, NH 03826-0368
PHONE: 803-329-8995 FAX: 803-329-4499

CIRCLE 228 ON READER SERVICE CARD

Slow Scan TV

doesn't have to be expensive anymore!



Every day more hams are enhancing their communication by using images. Join the fun and see what you've been missing.

Quality Color SSTV is easy and affordable with **Pasekon TV**. \$239.95

Requires IBM PC-compatible, 386 or better CPU, 1 Megabyte of memory, color VGA display, MS-DOS. Shipping: \$5 to U.S.A. and Canada, \$15 for others. Write or call for complete details.

Absolute Value Systems
115 Stedman St. #7
Chelmsford, MA 01824-1823
(508) 256 6907
e-mail: johnh@world.std.com

CIRCLE 351 ON READER SERVICE CARD

For The Ultimate Shack!



100%
made in
the U.S.A.

Imagine your callsign on the
A.R.E. Classic Clock!

- Beautiful, laminated original artwork.
- Quality quartz movement.
- Suitable for wall or desk (approx. 9"x9"x2").
- Runs on one AA battery (included).
- Only \$39.99 (plus \$4.50 shipping in U.S./foreign orders FPO New Hampshire).
- Specify callsign and choice of simulated walnut, light oak or black frame.

• Send check or money order to:
Amateur Radio Excellence
Box 1551 • Manchester, NH 03105

CIRCLE 243 ON READER SERVICE CARD

73 Amateur Radio Today • August, 1994 17

Performance SOFTWARE

KaGOLD for Kantronics w/V5 rom
PKGOLD for AEA PK-88,232,2232

Invest in the GOLD standard today!
Easy operation with incredible power!

- Conferencing • Background File Transfers
- Robot CQs • Logging • Macro Files
- Automatic QTH/QSL Exchange
- Advanced Text Handling
- 95 page Manual
- Extensive Help System
- Quick Reference Guide
- Nothing Else Comes Close
- Only \$79.95 plus \$5 s/h

InterFlex Systems

Box 6418
Laguna Niguel
CA 92607



VISA
MasterCard
Call or write today
for more details!

Phone 714 496-6639

CIRCLE 77 ON READER SERVICE CARD

Stand-Alone DDS

Continued from page 16

Finally, the final column (and all of the last line) represents checksums, one per line.

This format is a very compact way to list a computer program (the source code, with comments, is 342 lines long!) and is used by Motorola as a protocol for data transfer into a programmer. To restore the magazine copy back to the .S19 format, type the text into a word processor (omitting all spaces and bold-ing of the binary code). The file, when correctly saved as an ASCII file, is 918 bytes long and should load into an EPROM programmer or evaluator board.

Developing the Software (Hints)

The software is not difficult to write, especially if a few simple rules are followed:

- Use a development system, pick MCU accordingly.
- Use modular program structure.
- Use RAM for inter-routine interface.
- Use flow-charts/"pseudo-code."
- Test algorithms in higher-level language.
- Use in-line code to avoid branches (initially).
- Change or add just one thing at a time.

A development system is so useful that the choice of micro often depends upon which systems are available and for what price. Nothing beats hands-on/real-time access to your code for bug-killing. Keeping the code in RAM allows for easy patches and experimental code without having to re-compile or assemble, then program, over and over and over again. I chose the 'C8 because I have the evaluation board (and paid less than \$70 for it!). Also, some means of EPROM "blasting" of the single-chip is needed—also done by the evaluator board.

Partitioning the software into smaller routines is generally done for all but the most trivial programs. By reducing a complicated program into a group of simple programs, the job will go much quicker—it is far easier to debug several simple routines one at a time than it is to sort out one large complicated one. The ideal approach is to write the routines one by one and graft them into the existing work as they are debugged. This was done here by defining several tasks which were done sequentially at single points in time. For example, once the micro is initialized, it never has to be re-initialized. Likewise, once the BCD switches are read, they are not re-read until the BCD values are converted to binary and sent to the DDS chip. For my system, partitioning was obvious: initialize, read switches, binary-convert, and send to DDS.

Use RAM locations for inter-routine interface. This means defining a block of RAM for the input data and (if possible) another block of RAM for output data. Try

to keep the two blocks separate—this makes debug and patching much easier. Routines can be debugged independently by placing values in input RAM, running the routine, and looking at the output RAM to see if the expected results are there. If the program does not destroy its input variables upon execution, it can be run and re-run until debugging is done; otherwise, the input data has to be reloaded prior to each run. Naturally, if RAM space in the micro is limited, this rule may not always be practical, but it is a generally good strategy and makes the code more modular.

It is tempting to just dive in and start writing code, but programmers generally use flow charts or "pseudocode" to map out logic flow and settle in their minds how the finished routine will work. There is probably no better way to catch errors than to document how something works. Often something which seemed right in one's mind will look strange on the printed page and, sure enough, a closer look will spot the bug. Also, once a program has been "put to bed," it tends to be forgotten, so if documentation is not done up-front, the routine might have to be "reverse-engineered" later if it ever has to be modified or if a future bug pops up.

Flow charts use boxes, diamonds, and

ellipses to show program flow, while pseudocode is an "English-language" task-by-task description of what has to be done. I favor pseudocode—it is compact, takes no extra time for box-and-line drawing, and I can do it on my word processor.

Here is some of my pseudocode (done for the BCD-to-binary routine):

START:

8x digit 40-bit constants in ROM

8x BCD digits in RAM: A = 10 MHz value

B = 1MHz value

C = 100KHz value

D = 10KHz value

E = 1KHz value

F = 100Hz value

G = 10Hz value

H = 1Hz value

clear/init forty-bit register FREG

add (10MHz) constant 'A' # of times to FREG

add (1MHz) constant 'B' # of times to FREG

add (100KHz) constant 'C' # of times to FREG

add (10KHz) constant 'D' # of times to FREG

add (1KHz) constant 'E' # of times to FREG

add (100Hz) constant 'F' # of times to FREG

add (10Hz) constant 'G' # of times to FREG

add (1Hz) constant 'H' # of times to FREG

32 MSB's of FREG equal DDS binary code

EXIT:

Note that there are no branches and loops in this pseudocode—it is written "in-line." Branching errors are very common

Parts List

Qty.	Loc.	Description	Digi-Key #
1	U1	40.00 MHz osc. module	CTX155
1	U2	Motorola MC68HC705C8S microcomputer	(Note 1)
1	U3	EEPROM (not presently used)	ED3640
1	U2	40p machined (gold) IC socket	24LC04/P-ND
2	U1,U3	8p machined (gold) IC socket	ED3308
1	VR1	7805 regulator (TO-220)	AN7805
1	LED1	Green-light-emitting diode	P309
2	CR1,CR2	1N4001 diode	1N4001
2	RN3,RN6	33R resistor network (16dip8)	761-3-R33
2	RN4,RN5	33R resistor network (14dip7)	760-3-R33
1	RN1	4K7 resistor network (10sip9)	Q9472
1	RN2	10k resistor network (8sip7)	Q7103
2	RN7,RN8	10k resistor network (10sip9)	Q9103
3	C1,C3-4	100N ceramic cap (0.1" L.S.)	P4917
1	C2	100N ceramic cap (0.2" L.S.)	P4887
1	C5	22U aluminum electrolytic cap	P5411
1	"JP1"	Male or female right-angle DB-25	(Note 2)
1	P4	4x1 male header	WM4202
1	P6	7x1 male header	WM4205
1	P5	8x1 male header	WM4206
2	"P1A,"P2	9x1 male header	WM4207
1	P3	10x1 male header	WM4208
1	@P4	4x1 female housing	WM2002
1	@P6	7x1 female housing	WM2005
1	@P5	8x1 female housing	WM2006
2	@P1A,@P2	9x1 female housing	WM2007
1	@P3	10x1 female housing	WM2008
1		Blank printed circuit board	(Note 3)

Note 1. Blank C8s available from FUTURE Electronics; programmed C8s available from author (Box 232, Pakenham, Ontario, Canada K0A 2X0; 613-624-5247).

Note 2. You can use either male or female DB25 at JP1, depending on the desired option.

Note 3. Available from the author (see Note 1).

ORDER NOW 1-800 4 HOBBY KITS

- 2 Meters
- 223 MHz
- 440 MHz
- 6 Meters



FX-50 kit (6 Meters)\$149.95
FX-223 kit (1 1/4 Meters)\$149.95
CFX matching case set\$29.95

FANTASTIC FM TRANSCEIVERS

Ramsey breaks the price barrier on FM rigs! The FX is ideal for shack, portable or mobile. The wide frequency coverage and programmable repeater splits makes the FX the perfect rig for Amateur, CAP or MARS applications. Packeteers really appreciate the dedicated packet port, "TRUE-FM" signal and almost instant T/R switching. High speed packet? No problem. Twelve diode preamplifier channels. SW RF output, sensitive dual conversion receiver and proven EASY assembly. Why pay more for a used foreign rig when you can have one AMERICAN MADE (by you) for less. Comes complete less case and speaker mike. Order our matching case and knob set for that pro look.

FX-146 kit (2 Meters)\$149.95
FX-440 kit (3/4 Meters)\$169.95
FXM-1, ICOM/Yaesu style speaker mike\$29.95

2 MTR & 220 BOOSTER AMPS



Here's a great booster for any 2 meter or 220 MHz hand-held unit. These power boosters deliver over 30 watts of output, allowing you to hit the repeater's full quieting while the low noise preamp remarkably improves reception. Ramsey Electronics has sold thousands of 2 meter amp kits, but now we offer completely wired and tested 2 meter, as well as 220 MHz units. Both have all the features of the high-priced boosters at a fraction of the cost.

PA-10 2 MTR POWER BOOSTER (10 X power gain).....\$99.95

Fully wired & tested\$99.95
PA-20 220 MHz POWER BOOSTER (8 X power gain) Fully wired & tested\$99.95

SX-20 20 METER SSB/CW TRANSCEIVER

Finally, a handy go anywhere rig that puts the fun back into ham radio. How about the DDS synthesizer that tunes in 10 Hz steps with exceptionally low noise for weak signal reception. Or, how about the built-in Iambic CW keyer that has a digital readout of your CW speed. Perky 10 watt RF output (that's only 11/2S units below a 100 watt rig) can be tuned down for true QRP operation. Included with the SX-20 is the hand mike with handwired buttons for remote tuning of the rig while driving — or barking — or boating. Available in both fully assembled and fun to build kit form, you'll find that the SX-20 will become your favorite rig.



SX-20 20 meter SSB/CW Transceiver, fully wired, 1 yr. warranty\$429.95
SX-20 20 meter SSB/CW Transceiver Kit Form\$349.95
Optional CW Audio Filter SXCWN WT\$49.95 Kit\$39.95

Miniature SPEAKER-MIKE



Fits Icom, Yaesu, Alinco, Ramsey and Radio Shack rigs! Looking for a handy little speaker-mike to complement your transceiver or other ICOM style handie-talkie? The Ramsey SM-1 speaker-mike is a beauty. It's only 1 1/2" wide by 2 1/2" inches high and has a handy clip on the back so you can easily clip it to your lapel or shirt. Its small internal speaker isn't going to break any eardrums but is very clear and has plenty of pop to be heard when you talk. There's even a jack on the mike so when you plug it in, you still have the use of the speaker jack from your radio. Fits all Radio Shack, ICOM, Yaesu, Alinco and Ramsey rigs.

SM-1 Mini-Speaker mike, Fully assembled\$24.95

CW KEYS

Send perfect CW. Microprocessor keyer features 4 programmable memories of up to 26 words each, Iambic keying, dot-dash memory, variable speed from 3-60 WPM, adjustable sidetone, keying to any rig and fully RFI proof. EARMOM memory keeps messages up to 100 years — you'll go silent before the key! Includes built-in touch paddles or use your own. Easy assembly and matching case set available for a nice station look.

CW-700 Micro keyer kit\$69.95 MK Matching case set\$14.95
CW-700WT Assembled CW-700and case\$119.95

ACTIVE ANTENNA

Cramped for space? Get longwire performance with this desktop antenna. Properly designed it has dual HF and VHF circuitry and built-in whip antenna, as well as external jack. RF gain control and 9V operation makes unit ideal for SWLs, traveling hams or scanner buffs who need better reception. The matching case and knob set gives the unit a hundred dollar look!

AA-7Kit\$28.95 Matching case & knobset, CAA\$14.95

AIRCRAFT RECEIVER



Hear exciting aircraft communications — pick up planes up to 100 miles away! Receives 110-136 MHz AM air band, smooth varactor tuning superb with AGC, ceramic filter, adjustable squelch, excellent sensitivity and lots of speaker volume. Runs on 9V battery. Great for air shows or just hanging around the airport! New 30-page manual details pilot talk, too. Add case set for "pro" look.

AR-1 kit\$29.95
Matching case set, CAR\$14.95

2M POWER AMP

Easy to build power amp has 8 times power gain, 1W in, 8W out, 2W in, 16W out, 5W is for 40W out. Same amp as featured in many ham magazine articles. Complete with all parts, less case and T-R relay.

PA-1, 40W pwr amp kit\$34.95
TR-1, RF sensed T-R relay kit\$14.95

MINI KITS

Ramsey carries a complete line of low cost, easy to build, easy to use functional kits that can be used alone or as building blocks in larger more complex designs. Mini-kits include audio amps, tone decoders, VOX switches, timers, audio alarms, noise-makers and even shocking kits! Call for our free catalogue!

QRP AMPLIFIER

For a sick little QRP boost, use one of the 20 Watt amplifiers. Needs only 1/2-2 watts of drive for full output, linear for SSB, AM or CW operation, power MOSFETs for high efficiency and multistage low pass filter for a clean signal. Built-in T/R relay for automatic switching. Runs on 12-15 VDC at 2-4 amps. Add our matching case set for a complete station look.

QRP choice of bands\$49.95
Specify band: (QAMP-20, 30, 40, 80)
CQAMP Matching case set\$14.95

2WAY RADIO SERVICE MONITOR



COM-3, the world's most popular low-cost service monitor. For shops big or small, the COM-3 delivers advanced capabilities for a fantastic price — and our new lease program allows you to own a COM-3 for less than \$3.00 a day. Features • Direct entry keyboard with programmable memory • Audio & transmitter frequency counter • LED bar graph frequency/error deviation display • 0.1-10.000 uV output levels • High receive sensitivity, less than 5 uV • 100 kHz to 999.995 MHz • Continuous frequency coverage • Transmitter protection, up to 100 watts • CTS tone encoder • 1 KHz and external modulation. COM-3 2 Way Radio Service Monitor\$2995.00

FOXHUNT HEADQUARTERS



Locate hidden or unknown transmitters fast. The Foxhound direction finder connects to the antenna and speaker jack on any radio receiver, AM or FM from 1 MHz to 1 GHz. The antenna (a pair of dipole telescopic whips) is rotated until the Null meter shows a minimum. A pair of LEDs indicate to turn Left or Right. The Foxhound is ideal to use with a walkie-talkie, if you wish to transmit, go ahead, a built-in VFO switch senses any transmitted RF and switches itself out of circuit while you talk. It doesn't get any easier than this! We provide all parts except for a few feet of 1/2 inch PVC pipe available at any hardware store for a dollar or two. Add our matching case set for a complete finished unit. Be the one with the answers, win those transmitter hunts and track down those jammers, you'll do it all with your Foxhound.

Add some fun to your club events by having a transmitter hunt! Foxhunting is a crazy sweeping the nation, but many clubs are missing out on the action because they lack the expertise or time to develop their own foxhound transmitter. We set one of our most devious and sneaky engineers to the task of designing an easy to build and use, yet highly capable Foxhound transmitter. A snazzy microprocessor controller has both precision transmission characteristics allowing you to easily set the difficulty level from "beginner" to "know-it-all!" The StyFox, FHT-1, is a crystal controlled in the 2 meter band (crystal for 146.52 included) with a power output of 5 watts that is adjustable by the controller. The transmitter is programmed to ID in CW or add our voice option if you really want to aggravate the troops — "Ha ha, you can't find me!" Join the fun, get rid of those stinky old meetings and picnics, have a foxhound!

DF-1 Foxhound direction finder kit\$59.95 CDF Matching case set for DF-1\$14.95
FHT-1 StyFox Foxhound transmitter kit\$129.95 FHID-1 Voice ID option\$29.95
CFHT Heavy duty metal matching case set for FHT-1\$29.95

PACKET RADIO

Two new versions are available for the Commodore 64 (P-64A) or the IBM-PC (P-IBM). Easy assembly NO TUNING! Includes FREE disk software, PC Board and Full Documentation. Kit form.

P-64A\$59.95 P-IBM\$59.95 CASE CPK\$12.95

STEREO FM TRANSMITTER

Run your own Stereo FM radio station! Transmits a stable signal in the 88-108 MHz FM broadcast band up to 1 mile. Detailed manual provides helpful info on FCC regs, antenna ideas and range to expect. Latest design features adjustable line level inputs, pre-emphasis and crystal controlled subcarrier. Connects to any CD or tape player, mixer or radio. Includes free tuning tool! For a pro look add our matching case set with on-board whip antenna.

FM-10A Stereo transmitter kit\$34.95

CFM Case, whip ant set\$14.95

SPEECH SCRAMBLER

Descramble most scramble systems heard on your scanner radio or set up your own scrambled communication system over the phone or radio. Latest 3rd generation IC is used for fantastic audio quality — equivalent to over 30 op-amps and mixers! Crystal controlled for crystal clear sound with a built-in 2 watt audio amp for direct radio hook-up. For scramble systems, each user has a unit for duplex operation. Communicate in privacy with the SS-70. Add our case set for a fine professional finish.

SS-75 Scrambler/descrambler kit\$39.95
CSd Matching case set\$14.95
SS-70WT Assembled\$79.95
SS-70 and case set\$79.95

MICRO-MIKE

World's smallest FM wireless mike. Smaller than a sugar cube — including battery and mike. Two sets of SMT parts supplied in case you are clumsy! Terrific audio pick-up (pin drop at 5 ft) and transmit range of 300 ft. We include the battery (watch style), electret mike and even a tuning tool! Be a James Bond and learn SMT too!

FM-5 Micro mike kit\$19.95

CRYSTAL RADIO

Relive the radio past with a crystal set like your grandfather built. Uses genuine Galena crystal and catwhisker. Several different types of radios are built, including standard AM broadcast, shortwave and even WW II forster style. To conserve modern semiconductor detectors, we include a diode for comparison. No soldering required and we even give antenna ideas. Radio for free, get it now before Clinton taxes it!

CS-1 Crystal set kit\$19.95

DR. NI-CAD CONDITIONER/FAST CHARGER

Quit spending big bucks for replacement battery packs, rejuvenate and condition your batteries for peak capacity. Advanced circuitry has optimized discharge before charge to eliminate memory effect and to condition batteries that have been poorly cared for in the past. Quick charge rapidly brings battery to full charge in less than an hour — just 15 minutes for some types! And "top-off" charge mode squeezes every last bit of energy into each cell for the absolute most capacity. Switch-mode regulator controls constant current charge while being monitored by a negative delta-V system that cuts off the last charge at the exact point of full charge — batteries are charged, not cooked! Charges NiCads or NiMH packs from 2 to 10 cells (easily expanded) and current capacities up to 10 Amp-hours. Runs on 12 to 15 VDC. Out cooking your batteries, buying new packs, waiting hours for recharge, get a Dr. Ni-Cad today! Available in money saving kit form or wired and tested with case at a special price. Kit builders: add our matching case set for a snazzy finish.

DN-1 Dr. Ni-Cad conditioner/fast charger kit\$49.95
CDN Matching case set\$14.95
DN-1WT Fully assembled Dr. Ni-Cad with case\$89.95

ORDERS CALL 1-800-4 HOBBY KITS (446-2295) ORDERS ONLY
TECH/ORDER/INFO (716)924-4560 FAX (716)924-4555

TERMS: Satisfaction guaranteed. Examine for 10 days. If not pleased return in original form for refund. Add \$4.95 for shipping, handling and insurance. For foreign orders add 20% for surface mail. COD (U.S. only) add \$5.00. Orders under \$20 add \$3.00 NY residents add 7% sales tax. 90-day parts warranty on kit parts. 1-year parts & labor warranty on wired units.

RAMSEY ELECTRONICS, INC 793 PARKWAY VICTOR NY 14564

CIRCLE 34 ON READER SERVICE CARD

in raw code and the loops and branches can make following the program flow difficult. The use of in-line code is not "efficient" as far as memory space is concerned, but it is good for debug efficiency and it is better to have good fat code than compact buggy code. Once the code is debugged, then it can be "optimized." Also, in-line code generally runs faster and is much easier to follow if it has to be modified at a later time by a third party.

The last item is a lesson that I seem to have to learn every time I do a program. *Change only one thing at a time!* It is tempting to change several things at once before doing another download or PROM-blast, but if you do it this way it can be hard to see just which change caused which bug.

Using the Controller Board

Connections are made to the Kendraboard as follows:

Pin	MPU Port	Signal
P6-1	PA7	x10MHz COM
P6-2	PA6	x1MHz COM
P6-3	PA5	x100KHz COM
P6-4	PA4	x10KHz COM
P6-5	PA3	x1KHz COM
P6-6	PA2	x100Hz COM
P6-7	PA1	x10Hz COM
P6-8	PA0	x1Hz COM
P5-1	PB0	BCD "1" line
P5-2	PB1	BCD "2" line
P5-3	PB2	BCD "4" line
P5-4	PB3	BCD "8" line
P3-1	GND	Julieboard ground
P3-3	PC7	Julieboard *XFER (P1-7)
P3-4	PC6	Julieboard SCLK (P1-6)
P3-5	PC5	Julieboard SDATA (P1-2)

The connections on P3 can be made directly to the Julieboard via a cable or via wire-wrapped jumpers bridging P3 to the DB25 connector (P1). Note that the physical wiring differs for male vs. female DB25—examine the chosen connector carefully and locate the right pins. (The ground connection need not be made if a DB25 of either sex is used.)

The single in-line connectors are end-stackable, so some connectors could be partitioned into two smaller connectors. For example, "P6" could be implemented with a 4-pin connector to bring in the 4-bits BCD from the switch matrix and a 3-pin connector to bring out the spare two Port B bits and ground. This allows a more modular system where the thumbwheel switch cabling is completely separate from the cabling to those two spare bits. Likewise, connectors P2 and P3 may be partitioned into subsets.

Note that Julieboard signals ENPHACC, SHIFTEEN, and BANKSEL are not presently used, but could be in future versions. One advantage of using the DB25 is that an opposite-sex multiple DB25 "backplane" arrangement can be used to allow addition of future boards to the set. (For example, a

Machine Code Listing (Modified .S19 File)

S113	1000	40060000000000000066A31001000000	7C
S113	1010	0066D762A329040000680A4D6EF1316B	A3
S10B	1020	00673ED32E6BBF61	93
S113	0100	A6FFB704A6FFB70A600B705A6FFB706	6B
S113	0110	A67FB702A600B70B07B1B7B2B7B3B7B4	4A
S113	0120	B7B5B7B6B7B7AE00A67FCD0209A6BFCD	A7
S113	0130	0209A6DFCD0209A6EFC0209A6F7CD02	7A
S113	0140	09A6FBCD0209A6FDCD0209A6FEC0209	32
S113	0150	3FA83FA93FAA3FAB3FACAE00CD01D1AE	13
S113	0160	01CD01D1AE02CD01D1AE03CD01D1AE04	9A
S113	0170	CD01D1AE05CD01D1AE06CD01D1AE07CD	B5
S113	0180	01D1B6A8CD01DDB6A9CD01DDB6AACD01	58
S113	0190	DD01DDB6ACD01DD1A02CD01FF1E02CD01FF	9C
S113	01A0	1F02CD01FFCC012698B79FB6ACD91020	11
S113	01B0	B7ACB6ABD91018B7ABB6AAD91010B7AA	5A
S113	01C0	B6A9D91008B7A9B6A8D91000B7A8B69F	80
S113	01D0	81E6B02707CD01A84ACC01D381BF9EAE	EA
S113	01E0	08CD01EA5A26FABE9E814824051B02CC	9A
S113	01F0	01F41A029D9D9D1D029D9D9D1C0281B7	C7
S113	0200	9FA6104A26FDB69F81B700CD01FFB601	17
S10A	0210	43A40FE7B05C81	79
S105	1FFE	0100	DC
S9030000FC			

T-R adapter/amp board and updated software will allow me to use this combo in VFO service for my Atlas 210 transceiver.)

My favorite use for the stand-alone combo is as the LO for a tunable mixer. I have a Mini-Circuits SRA-1 mixer in a BNC-equipped box: The RF port goes to the antenna, the LO port goes to the Julieboard, and the IF port goes to a surplus crystal-controlled SSB/AM receiver tuned to 6.300 MHz. I program the Julieboard to produce an output 6.300 MHz above/below the desired frequency, set the proper sideband, and . . . voilà! Someday, I will mod the software so I won't have to do the frequency offset in my head.

Of course, this controller is suitable for controlling things other than just Julieboards. For example, one of the newer

and is about the size of a large postage stamp.

What's Next?

I plan to evolve my design as I go, and add (in rough order):

- External BCD display via '595 shift registers.
- Option for up/down non-mechanical tuning.
- SCI support (remote operation via serial port).
- EEPROM support.
- Offsets for use as transceiver VFO.

Conclusions

I have had the stand-alone controller running the Julieboard DDS synthesizer in my shack for several weeks and am very happy with it. I can't wait to incorporate it in my portable QRP transceiver project. Right now, I have the best of both worlds—if I need special programming functions, the Julieboard can be unhooked and reconnected to the PC; otherwise, it is left attached to the Kendraboard for general purpose operation. Not having to wait for boot-up is great and there is a noticeably lower RF noise level vs. the PC.

Personal Note



Why "Kendraboard"? Readers familiar with the "Julieboard" article will recall that Julie had two (now three!) sisters and that they expected equal treatment. Kendra thought that naming the controller after her was a great idea. Now Karen wants to know when I'm going to do *her* board . . .

"Not having to wait for boot-up is great and there is a noticeably lower RF noise level vs. the PC."

high resolution D/A converters could be driven to make a digital power supply or voltage source. How about -16.384V to +16.383V adjustable in 1 mV steps via thumbwheel? Or one of the new PLL chips and thumbwheels for a synthesized 6m or 2m rig?

There is no reason why the processor has to be a '6805 (or even a Motorola device). For example, PIC chips are available via DigiKey, and one quite intriguing product is a "BASIC stamp" which runs BASIC programs kept in an on-board EEPROM

Explore The World of Quorum Wefax

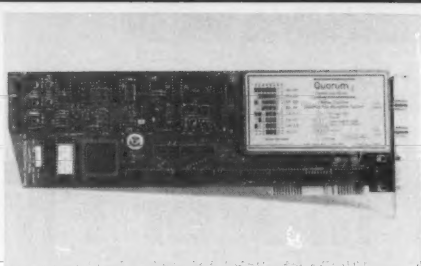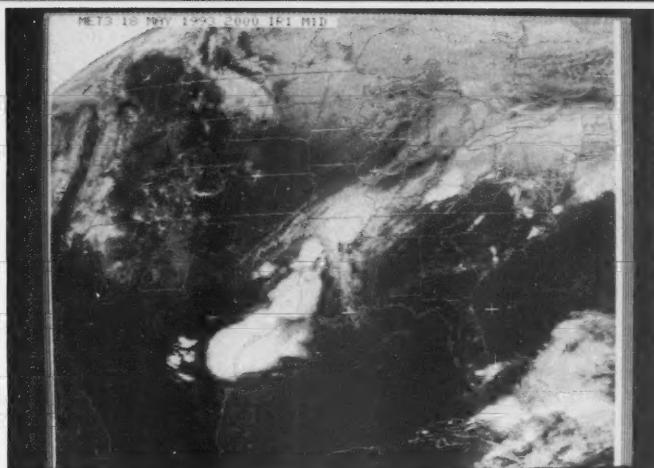

Wefax Explorer

Integrated Wefax / APT Receiver and Scan Converter with Qfax software.


\$695.00 complete

shipping and taxes not included



The Best Price / Performance. Period!

Construct a Wefax / APT reception system from individual component receivers, scan converters and image processing software and you'll spend more money for fewer features, poorer performance, no automation and a jungle of wires. With the Wefax Explorer, simply connect an antenna and a few mouse clicks later you're receiving the highest quality images possible. The Explorer is backed by a 1 year limited warranty and the extensive experience of the leading Wefax hardware manufacturer. Quorum equipment is used by virtually all wefax suppliers in worldwide amateur, commercial and military systems.

QFAX Features

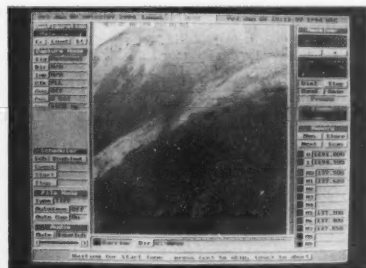


- GOES / Meteosat Wefax Reception
- NOAA / Meteor APT Reception
- HF Nafax Reception
- Dual RF ports for geosync and polar reception under software control
- Integrated preamp and down converter power inserters
- 50 user definable configurations
- Software controlled receiver with 2 UHF, 10 VHF memories and scan
- On board audio amplifier and speaker with software controlled volume, squelch and mute
- Automatic Unattended Animation works continuously

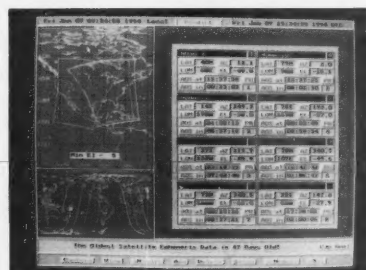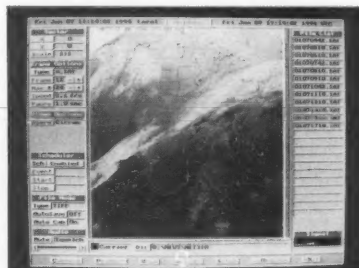

- Integrated Satellite visibility prediction with automatic capture for up to 8 satellites simultaneously
- Automatic time and ephemeris stamping for navigation
- 27 day programmable schedulers
- Automatic digital gain lock in ALL modes, PLL clocking

- 8 bit data for up to 256 gray levels
- View at up to 1280 x 1024 256 color
- Use TIFF, GIF or PCX file formats and convert to BMP, JPEG, EPS and binary
- Contrast, Brightness, 3D effect, Sharpen, Smooth, Noise, Histograms and other image processing

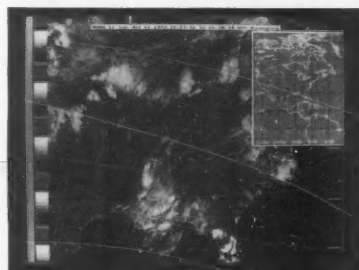

- Ephemeris based NOAA APT navigation with geo-political and Lat-Lon overlays
- NOAA Tools show satellite path, Lat-Lon of cursor, distance and bearing to reference point
- Automatic Temperature Calibration
- Color Palettes and NOAA curves

Quorum Communications, Inc. FAX (214) 915-0270
8304 Esters Blvd. - Suite 850 - Irving, Texas 75063 (214) 915-0256 BBS (214) 915-0346

CIRCLE 257 ON READER SERVICE CARD

The Azden PCS-7500H 6 Meter FM Transceiver

50 watts on 6 in an attractive, low-cost mobile.

Azden Corporation is the only manufacturer of monoband mobile FM transceivers for all the popular bands from 28 through 440 MHz and really has a corner on the market for 6 and 10 meter FM rigs. When given the opportunity to review the new PCS-7500H 6 meter FM rig, I was happy to jump right on it, since the 50 MHz band is full of FM simplex and repeater activity here in Southern California.

Six meters is a unique band that combines the propagation advantages of both VHF and HF. For line-of-sight (direct wave) work, 6 is not much different from 2 meters or 135 cm (222 MHz), although the longer wavelength produces less rapid signal strength flutter. Because a quarter-wavelength at 6 meters is about 4'9" long, peaks and nulls in signals are produced by considerably more movement than, say, at 2 meters, where a quarter-wave is only about 19". Tropospherically-enhanced propagation, especially "tropo ducting," occurs less on 6 than on 2 or the higher frequency bands, making those occasional DX contacts a bit more rare; however, the 50 MHz band does afford its users much more frequent sporadic-E ("E-skip") propagation, especially from May through July, and again in December, and 1,200-mile QSOs on 6 meters are not rare. Plus, 6 meters enjoys occasional F-layer propagation, producing contacts to several thousand miles with relatively low power during solar-cycle peaks. If you haven't tried 6 yet, it is surely an interesting band that has its share of die-hard users.

Overview

The first thing anyone notices about the PCS-7500H (or any of the new Azden PCS-7000 series) is how incredibly beautiful it is to look at. It is a fine-looking radio, with every single panel button illuminated with a dark orange glow for easy viewing. The LCD display screen is similarly backlit and has a warm, inviting glow. Even the push-buttons on the DTMF ("touch-tone") microphone are all illuminated; a nice touch. The rig comes equipped with a convenient and sturdy mounting bracket, a PTT/DTMF microphone, a long DC power cable with the positive side fused, a connector disconnect point about eight inches from the rear of the radio, and all mounting hardware. It also comes with a CTCSS ("PL") encoder built in. The PCS-

7500H is rated to produce 50 watts RF output power (with a 10 watt "low power" mode front-panel selectable), programmable frequency steps, and other features normally found on modern FM transceivers.

The PCS-7500H has good and bad points, and I'll try to discuss both fairly. I like thoughtful touches, with which the Azden is loaded. For example, they used a flat-blade automotive-style fuse in the DC power cable. Small point, but these have real advantages over the old-fashioned 3AG, AGC, MDL (etc.) glass cartridge fuses used in most other equipment: They can really handle a lot of current without thermal meltdown, are readily available at gas stations, and are very inexpensive. I also like the connectorized power cable, which uses an automotive-style molded connector set that has also proven its reliability in years of service. Its coaxial antenna cable receptacle, a standard "UHF" SO-239, is firmly mounted to the rear panel of the radio, not hanging on a short coax extension cable as in many modern mobile rigs. Its hand-held PTT microphone has a solid feel and produces excellent transmit audio. (More on this later.) Its receiver audio is full, loud and undistorted, and sounds better than many mobile rigs. And the rig is beautiful, especially at night when one can enjoy all the warmly lit controls. The Azden can accommodate any frequency "split" between transmit and receive, since each channel can be separately programmed (into memory) with TX/RX frequencies, and its 20 memories are adequate for 6 meters. As with all modern FM

rigs, each memory will store frequency "split" and PL tone (if required).

I also like the built-in heat-sink fan in the PCS-7500H. It activates after a few minutes of continuous transmission at normal room temperature and helps maintain a "cool-to-the-touch" heat sink, undoubtedly prolonging the operating life of the final amplifier stage.

On the other hand, the Azden is full of quirks, some of which I found a bit annoying. First, the PCS-7000 series all seem to share one instruction manual, written around the PCS-7000(H) 2 meter rig. The PCS-7500H manual contains an "addendum" sheet (one page) which modifies the PCS-7000 manual to suit the 6 meter rig, but this means referring back and forth between two sets of information. And the original PCS-7000 manual contains mistakes and typographical errors. Most aren't meaningful, but I started to proof-read the manual in search of errors and stopped when I found a dozen by the fourth page. This reminded me of how badly written the older Japanese equipment manuals used to be, before the manufacturers employed English-speaking technical writers to make them better.

Next, there is no easy way to use the rig with tone-activated (CTCSS) repeaters when in the "VFO" or "Direct" mode. PL-tones are easily programmed into memory, and once this is performed, tone-activated repeaters are easy to use; but if you're "scanning around" looking for activity in an unknown region and stumble across a tone-activated repeater not already in memory, there's no easy



**Last
chance
to buy**

Cellular Modifiable Scanners

**COMMUNICATIONS
ELECTRONICS INC.**
Emergency Operations Center

New FCC Rules Mean Last Buying Opportunity for Radio Scanners

Recently, the FCC amended Parts 2 and 15 of its rules to prohibit the manufacture and importation of scanning radios capable of intercepting the 800 MHz. cellular telephone service. The Electronics Communications Privacy Act prohibits the intentional interception of cellular telephone transmissions. Supplies of scanners that are capable of being modified to receive full 800 MHz. coverage such as the Bearcat 200XLT and 2500XLT are in very short supply. If you need technical assistance or recommendations to locate a special scanner or solve a communications problem, call the Communications Electronics Inc. technical support hotline for \$2.00 per minute at 1-900-555-SCAN.

Radio Scanners

Bearcat® 2500XLT-J

List price \$649.95/CE price \$339.95/SPECIAL
400 Channels • 20 Banks • Turbo Scan
Rotary tuner feature • Auto Store • Auto Sort
Size: 2-3/4" Wide x 1-1/2" Deep x 7-1/2" High
Frequency Coverage: 25.000 - 549.950, 760.000 - 823.950, 849.0125 - 868.950, 894.0125 - 1,300.0000 MHz.

Signal intelligence experts, public safety agencies and people with inquiring minds that want to know, have asked us for a world class *handheld* scanner that can intercept just about any radio transmission. The new Bearcat 2500XLT has what you want. You can program frequencies such as police, fire, emergency, race cars, marine, military aircraft, weather, and other broadcasts into 20 banks of 20 channels each. The new rotary tuner feature enables rapid and easy selection of channels and frequencies. With the AUTO STORE feature, you can automatically program any channel. You can also scan all 400 channels at 100 channels-per-second speed because the Bearcat 2500XLT has TURBO SCAN built-in. To make this scanner even better, the BC2500XLT has AUTO SORT - an automatic frequency sorting feature for faster scanning within each bank. Order your scanner from CEI.

A modification sheet with instructions to restore full 800 MHz. coverage for the Bearcat 2500XLT or Bearcat 200XLT may be ordered for \$8.00. To order any Bearcat radio product call 1-800-USA-SCAN.

Great Deals on Bearcat Scanners

Bearcat 8500XLT-J base/mobile \$369.95
Bearcat 890XLT-J base/mobile...\$244.95
Bearcat 2500XLT-J handheld \$339.95
Sportcat 150-J handheld.....\$199.95
Bearcat 760XLT-J base/mobile...\$199.95
Bearcat 700A-J info mobile.....\$149.95
Bearcat 560XLA-J base/mobile....\$84.95
Bearcat 220XLT-J handheld.....\$229.95
Bearcat 200XLT-J handheld..\$199.95
Bearcat 148XLT-J base/WX alert..\$88.95
Bearcat 120XLT-J handheld.....\$159.95
Bearcat BCT2-J info mobile.....\$139.95

NEW! RELM® WHS150-J

List price \$481.67/CE price \$339.95/SPECIAL
16 Channel • 5 Watt VHF scanning transceiver
Size: 2.45" Wide x 1.38" Deep x 6.4" High
Frequency range: 148.000 to 174.000 MHz. continuous coverage.
Will also work 144.000-148.000 MHz. with reduced performance.
The RELM WHS150 is our most popular programmable five watt, 16 channel handheld transceiver with built-in CTCSS, which may be programmed for any 39 standard EIA tones. The full function, DTMF compatible keypad also allows for DTMF Encode/Decode and programmable ANI. Weighing only 15.5 oz., it features dealer programmable synthesized frequencies either simplex or half duplex in both 5.0 and 6.25 KHz. increments. Other features include scan list, priority channel, selectable scan delay, selectable 5 watt/1 watt power levels, liquid crystal display, time-out timer and much more. When you order the WHS150 from Communications Electronics Inc., you'll get a complete package deal including antenna, battery, belt clip and user operating instructions. Other accessories are available. A leather carrying case with swivel belt loop part #LCWHS is \$49.95; rapid charge battery charger, part #BCWHS is \$69.95; speaker/microphone, part #SMWHS is \$54.95; extra ni-cad battery pack, part #BP007 is \$59.95. The radio technician maintaining your radio system must order programming instructions part #PI150 for \$18.00 to activate this radio.

Bearcat® 8500XLT-J

List price \$689.95/CE price \$369.95/SPECIAL
500 Channels • 20 Banks • Alphanumeric display
Turbo Scan • VFO Control • Priority channels
Auto Store • Auto Recording • Reception counter
Frequency step resolution 5, 12.5, 25 & 50 KHz.
Size: 10-1/2" Wide x 7-1/2" Deep x 3-3/8" High
Frequency Coverage:
25.000 - 28.995 MHz. (AM), 29.000 - 54.000 MHz. (NFM),
54.000 - 71.995 MHz. (WFM), 72.000 - 75.995 MHz. (NFM),
76.000 - 107.995 MHz. (WFM), 108.000 - 136.995 MHz. (AM),
137.000 - 173.995 MHz. (NFM), 174.000 - 215.995 MHz. (WFM),
216.000 - 224.995 MHz. (NFM), 225.000 - 399.995 MHz. (AM),
400.000 - 511.995 MHz. (NFM), 512.000 - 549.995 MHz. (WFM),
760.000 - 823.9875 MHz. (NFM), 849.0125 - 868.9875 MHz. (NFM),
894.0125 - 1,300.000 MHz. (NFM).

The new Bearcat 8500XLT gives you pure scanning satisfaction with amazing features like Turbo Scan. This lightning-fast technology featuring a triple conversion RF system, enables Uniden's best scanner to scan and search up to 100 channels per second. Because the frequency coverage is so large, a very fast scanning system is essential to keep up with the action. Other features include VFO Control - (Variable Frequency Oscillator) which allows you to adjust the large rotary tuner to select the desired frequency or channel. Counter Display - Lets you count and record each channel while scanning. Auto Store - Automatically stores all active frequencies within the specified bank(s). Auto Recording - This feature lets you record channel activity from the scanner onto a tape recorder. You can even get an optional CTCSS Tone Board (Continuous Tone Control Squelch System) which allows the squelch to be broken during scanning only when a correct CTCSS tone is received. 20 Banks - Each bank contains 25 channels, useful for storing similar frequencies in order to maintain faster scanning cycles. For maximum scanning enjoyment, order the following optional accessories: PS001 Cigarette lighter power cord for temporary operation from your vehicle's cigarette lighter \$14.95; PS002 DC power cord - enables permanent operation from your vehicle's fuse box \$14.95; MB001 Mobile mounting bracket \$14.95; BC005 CTCSS Tone Board \$54.95; EX711 External speaker with mounting bracket & 10 feet of cable with plug attached \$19.95. The BC8500XLT comes with AC adapter, telescopic antenna, owner's manual and one year limited warranty from Uniden. Order your BC8500XLT from Communications Electronics Inc. today.



CB/GMRS Radios

The Uniden GMR100 is a handheld GMRS UHF 2-way radio transceiver that has these eight frequencies installed: 462.550, 462.725, 462.5875, 462.6125, 462.6375, 462.675, 462.6625 and 462.6875 MHz. This one watt radio comes with flexible rubber antenna, rechargeable ni-cad battery, AC adapter/charger, belt clip, F.C.C. license application and more.
Cobra 2000GTL-J SSB Deluxe CB Base \$389.95
Uniden GMR100-J GMRS Handheld.....\$159.95
Uniden WASHINGTON-J SSB CB Base..\$189.95
Uniden GRANTX-J SSB CB Mobile.....\$139.95
Uniden PRO538W-J CB & Weather.....\$59.95

Shortwave

ICOM AH7000-J super wideband discone type antenna.....\$99.95
Grundig Satellit 700-J portable with 512 memory RAC adapt...\$389.95
Grundig Yacht Boy 400-J digital portable shortwave.....\$199.95
Grundig Yacht Boy 2300-J portable shortwave.....\$139.95
Sangean ATS202-J ultra compact 20 memory shortwave.....\$79.95
Sangean ATS606-J ultra compact 45 memory shortwave.....\$149.95
Sangean ATS606P-J shortwave with antenna & AC adapter.....\$169.95
Sangean ATS800-J portable 20 memory shortwave.....\$69.95
Sangean ATS803A-J portable with SSB reception & AC adapter..\$159.95
Sangean ATS808-J portable 45 memory shortwave.....\$159.95
Sangean ATS818-J portable without cassette recorder.....\$189.95
Sangean ATS818CS-J with cassette recorder.....\$209.95
Sangean ANT60-J portable shortwave antenna.....\$9.95

Weather Stations

Public safety agencies responding to hazardous materials incidents must have accurate, up-to-date weather information. The Davis Weather Monitor II is our top-of-the-line weather station which combines essential weather monitoring functions into one incredible package. Glance at the display, and see wind direction and wind speed on the compass rose. Check the barometric trend arrow to see if the pressure is rising or falling. Our package deal includes the new high resolution 1/100 inch rain collector part #7852-J, and the external temperature/humidity display part #7859-J. The package deal is order #DAVI-J for \$524.95 plus \$15.00 shipping. If you have a personal computer, when you order the optional Weatherlink computer software for \$149.95, you'll have a powerful computerized weather station at an incredible price. For the IBM PC or equivalent order part #7862-J. For Apple Mac Plus or higher including Quadra or PowerBook, order part #7866-J.

Other neat stuff

Uniden EXP200-J 900 MHz. 2 line cordless phone.....\$289.95
Uniden EXP100-J 900 MHz. 1 line cordless phone.....\$269.95
Cobra CP910-J 900 MHz. spread spectrum cordless phone.....\$249.95
ICOM GP222-J handheld global positioning system.....\$699.95
WX200-J weather radio with storm alert.....\$35.95
RELM WHS150-J VHF handheld 5 watt, 16 ch. transceiver.....\$339.95
RELM RH256NB-J VHF 25 watt synthesized transceiver.....\$284.95
Ranger RC2950-J 25 watt 10 meter ham radio.....\$244.95
Ranger RC2970-J 100 watt 10 meter ham radio.....\$369.95
Uniden LAD900WV-J Super Wideband Laser/Radar Detector.....\$169.95
HCCPJ HamCall CB Rom for IBM PC by Buckmaster Publishing.....\$39.95
PWB-J Passport to Worldband Radio by IRS.....\$10.95
POL1-J Police Call for CT, ME, MA, NH, NY, RI, VT.....\$5.95
POL2-J Police Call for DE, MD, NJ, PA.....\$5.95
POL3-J Police Call for Michigan & Ohio.....\$5.95
POL4-J Police Call for IL, IN, KY, WI.....\$5.95
POL5-J Police Call for IA, KS, MN, MO, NE, ND, SD.....\$5.95
POL6-J Police Call for DC, FL, GA, NC, PR, SC, VA, WV.....\$5.95
POL7-J Police Call for AL, AR, LA, MS, OK, TN, TX.....\$5.95
POL8-J Police Call for AZ, CO, ID, MT, MN, NV, UT, WY.....\$5.95
POL9-J Police Call for California, Oregon & Washington.....\$5.95
ANTXV-J VHF scanner/VHF transmitting antenna PL259 connector.....\$29.95
ANTMBNBJ magnet mount scanner antenna w/ BNC connector.....\$29.95
ANTMAGTBJ magnet mount scan antenna w/ Motorola plug.....\$29.95
ANTMPLJ magnet mount scan antenna with PL259 connector.....\$29.95
ANTSGNBJ magnet mount scanner antenna with BNC connector.....\$29.95
ANTSGMTBJ glass mount scanner antenna with Motorola jack.....\$29.95


Buy with confidence

It's easy to order from CEI. Mail orders to: Communications Electronics Inc., Emergency Operations Center, P.O. Box 1045, Ann Arbor, Michigan 48106 U.S.A. Add \$15.00 per radio for U.S. ground shipping and handling in the continental U.S.A. unless otherwise stated. Add \$8.00 shipping for all accessories and publications. Add \$8.00 shipping per antenna. For Canada, Puerto Rico, Hawaii, Alaska, P.O. Box, or APO/FPO delivery, shipping charges are two times continental U.S. rates. Michigan residents add state sales tax. No CODs. No returns or exchanges after 15 days. 10% surcharge for net 10 billing to qualified accounts. All sales are subject to availability, acceptance and verification. Prices, terms and specifications are subject to change without notice. We welcome your Discover, Visa, American Express or MasterCard. Call 1-800-USA-SCAN to order toll-free. Call 313-996-8888 if outside the U.S.A. FAX anytime, dial 313-663-8888. For technical assistance to solve your communications problem, call the Communications Electronics technical support hotline for \$2.00 per minute at 1-900-555-SCAN. Order your new electronic equipment from Communications Electronics Inc. today.

**For credit card orders call
1-800-USA-SCAN**
Communications Electronics Inc.

Emergency Operations Center
P.O. Box 1045, Ann Arbor, Michigan 48106-1045 U.S.A.
For information call 313-996-8888 or FAX 313-663-8888

TIRED OF PLAYING GAMES? Finally, a practical use for your sound card!

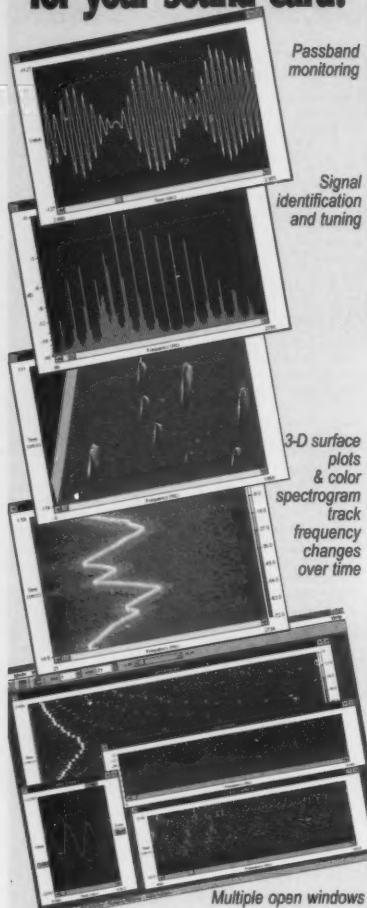

Spectra Vision & Spectra Plus.

Real-time audio spectrum analyzers. Full control over FFT size, sampling rate, scaling, gain, and averaging. Requires 386 or better, Windows 3.1 and any Windows compatible 8 or 16 bit soundcard.

"A stroke of brilliance...a groundbreaking and valuable program."—Monitoring Times

"Knock-your-socks-off quality!"—Harold Price, QEX Magazine, Dec. '93

	Spectra Vision	Spectra Plus
Modes:		
Real time	●	●
Recorder	●	●
Post process	●	●
Price	\$89 ⁰⁰	\$179 ⁰⁰
All display formats included with either package. 60 day money-back guarantee.		

Also available: RF Vision. Ask us about it!

800-401-3472 fax/voice 206-697-3472

Visa, MasterCard, Check or Money Order

Pioneer Hill Software

24460 Mason Rd., Poulsbo, WA 98370
S & H included, foreign delivery add \$10.00
Demo disk \$4.00 (credit toward purchase)

In Australia: ME Technologies

PO Box 50, Dyers Crossing NSW 2429, +61 65-50-2200

In Sweden: PICS Corporation

PO Box 37, 440 41 Nol, +46 303-42995

way to access it without programming the required frequency, offset and tone data into memory first. Azden did provide me with an updated sheet entitled, "Error in Azden PCS-7000H Instruction Manual" which does describe how to use a PL tone in the "Direct" mode, but the procedure is so complicated it couldn't possibly be performed while driving.

The rig's 20 memory channels are stored in two banks of 10, called A0-9 and B0-9. No big deal, although simply calling them 0-19 or 1-20 might have been nicer. But the rig always "powers up" on memory A0, regardless of where you used it last. This is frustrating, especially since all my other modern FM transceivers "remember" where they were last used and "power up" on the last-used channel.

Also, there's no VFO/memory knob of any kind on the Azden, nor may frequencies or memory channel numbers be entered directly with keypad strokes. The only way to go from, say, memory A3 to memory B5, is by using the "up" or "down" buttons (either on the front panel or on the PTT microphone) to go through all the memories in between. And if you depress the "up" or "down" button more than momentarily, the rig begins scanning through the memory channels very quickly, much too fast to stop on the channel of your choice. With the technology and chip sets available today, there's no reason for any channelized radio to not have "direct frequency entry" with keypad strokes. (That is, if you wish to "dial up" 52.525 MHz, you'd just depress 2-5-2-5 on the keypad, and the rig would go there instantly.) This used to be tricky in the old days, but can now be done with one \$2 chip. In Azden's defense, however, I must admit that many modern FM mobile rigs still don't contain this feature. Darned if I know why not.

Another minor annoyance is that a user of the PCS-7500H must refer to a "Tone Code Table" when programming PL tone frequencies. That is, the CTCSS frequencies, of which there are 38 in common use, are not actually displayed by the Azden during the PL selection process. Instead, tones are selected and displayed by two-digit codes which might only be memorized by The Amazing Kreskin. Since I'm not so amazing, I had to constantly refer to a chart on page 14 of the instruction manual to determine which two-digit code corresponded to each PL tone frequency. For example, Code "19" corresponds to a CTCSS frequency of 127.3 Hz. Sid Wolin at Azden in New York did advise that the newer-generation PCS-7000 series (unavailable at this writing) would incorporate a new microprocessor which allowed direct PL frequency address and readout, as on their handie-talkies.

Programming the PCS-7500H takes some getting used to if you are more familiar with one of the other brands of equipment. It's not difficult, but might be too complex for use "on the fly" while driving. Again, to be fair, most of the mobile rigs I've used are too complicated to program without focusing complete atten-

tion on the task. But the Azden instruction manual makes the job sound more difficult than it is, with 12 paragraphs assigned to the description. The Azden is unique in that it only stores the memory data when you turn the rig off, and then back on. To quote from the manual, "Note: Be sure to turn off the power when you have completed programming. This procedure is required to get each setting programmed in and then to get out of the programming mode." Weird, but it works.

With all these quirks to write about, you may get the idea that I really don't like the Azden. This isn't true. I do like the rig, but it took more getting used to than it should have. In terms of performance, the Azden is an impressive package.

The Technical Side

One thing I like a lot is that Azden provides "full-sized" schematic diagrams for their rigs. They are clear and easy to read without a magnifying glass, and will be of value to those who like to perform modifications or do their own service work. The schematic for the PCS-7500H reveals the transmitter final power amplifier to be discrete (2SC2097), rather than a molded hybrid "brick" (modular) amplifier as used by most other manufacturers. I like the discrete approach better because it is more user-serviceable for reasonable cost. Should the PA "final" ever go out, it will be much cheaper to replace a \$10 transistor than a \$90 module. Not that I would expect the final to fail; the people at Azden assured me they've never seen one fail yet.

The PA circuit board also contains a discrete driver stage (2SC1972), the thermal detector which switches on a cooling fan if the heat-sink temperature gets too hot, the VSWR protection detector circuit (which shuts the transmitter down if a gross antenna mismatch occurs), and a bandpass filter circuit which is in line with the antenna to both the receiver and the transmitter. PA stage tuning is accomplished by a three-section low-pass matching network. One drawback to the discrete PA stage is its critical tuning: The PCS-7500H does deliver 50 watts as rated into a perfect 50 ohm resistive load, but power output falls off rapidly when the transmitter is faced with any mismatch at all. The antenna I used for most of my testing, a vertical with a measured VSWR of 1.5:1, only allowed the transmitter to deliver between 28 and 42 watts, depending on the operating frequency and exact nature of the mismatch. Some of the "brick" stages, while costly to replace, are more forgiving of mismatches.

The receiver's front end, a 3SK101 dual-gate MOSFET, is protected against transients by "back-to-back" signal diodes and features bandpass tuning of both its input and output to help reduce interference and intermodulation from adjacent services. The first RF mixer, another 3SK101 with an output of 14 MHz, is followed by a four-pole crystal filter whose output drives the IF SYSTEM integrated circuit, an MC3361D. The receiver's second IF at 455 kHz is filtered by a 15 kHz bandwidth ceramic filter, type KBF455R15A. The receiver

CIRCLE 311 ON READER SERVICE CARD



BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT # 707 RIVERTON NJ

POSTAGE WILL BE PAID BY ADDRESSEE


**73 Amateur
Radio Today**

PO BOX 7693
RIVERTON NJ 08077-8793

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



☐ **YES! I want to grow with**
73 Amateur Radio Today.

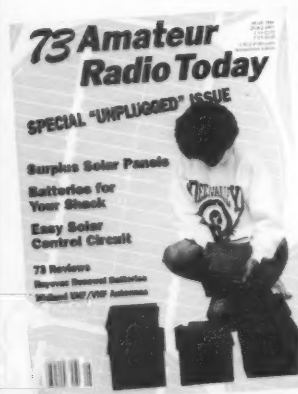

Send me 1 year (12 issues in all) of 73 for the low price of \$19.97! (Save over \$15.00 off the cover price). Mail this postage paid card today. For instant service dial toll free: 800-289-0388.

Name (please print) Call

Address

City State Zip

☐ Payment enclosed ☐ Bill me
 Charge my: ☐ MC ☐ VISA ☐ AMEX

Card Number Exp. date

Newsstand rate \$35.40. Basic subscription rate \$24.97 (Canadian orders add \$7.00 per year plus \$1.40 GST; other foreign countries add \$19.00 per year for surface mail, \$42.00 per year for airmail. Please allow 4-6 weeks for delivery of first issue.

B9408LS82

er isn't razor-sharp, but suffices nicely with the 20 kHz channel spacing commonly used on 6 meters. One might think that a VHF rig with a first IF at 14 MHz could be easily interfered with by strong 20 meter signals, but I didn't find this to be a problem.

The transmitter uses what Azden proudly describes as "true FM" for modulation, and I guess it is, with the microphone amplifier stage directly driving the VCO variable-capacitance tuning diodes. However, I've never been able to tell the difference between "true FM" and "phase modulation," since, mathematically speaking, one is the reciprocal of the other and a phase-modulated signal, when integrated, becomes "FM."

I did have a problem with the unit as received, in that the transmitted modulation was tinny and distorted. Azden was surprised to hear this, and immediately shipped a new microphone, thinking that was likely to be the problem. It was, and the new microphone produced clear, crisp modulation that received compliments on the air. (I must say, Azden's service in this instance was remarkable. They must have shipped the new mike the day I called them on the telephone, because I received it the next day, 3,000 miles away!)

One thing I think is a bit "clunky" about the Azden is that it uses an old-fashioned relay for transmit-receive RF switching. Relays work fine, and Azden claims they've never had one fail, even in prolonged packet relay service, but their switching "turnaround" speed is rather slow compared with solid-state switches, and if the radio is used for packet, the user may have to re-set switching parameters in his TNC program. I was used to using 30 milliseconds (mS) or less in packet switching, but this is too fast for a relay. I'd recommend more like 300 mS for a relay-operated rig. There's not a lot of packet activity

on six anyway, but if you really wanted to, you could home-brew a PIN diode modification fairly easily.

A listing of manufacturer's ratings vs. bench measurements made on the PCS-7500H is contained in the sidebar.

Summary

It took me a while to get used to the Azden. It does have quirks, as described earlier, that make it more troublesome to use than I'd like. But for an affordable, single-band 6 meter FM rig, it's almost the only game in town. Same goes for 10 meters, with the PCS-7800H. I understand the Southern California Six Meter Club, which actively promotes the use of this band, has ordered a great number of these radios for their members and they are well accepted. In speaking with local 6 meter repeater owners, I found they were all very aware of the Azden and were either using one personally or had at least had their hands on one. It does disturb me a bit that the transmitter power output falls off so sharply when connected to other than a perfect load, but since the FM subband on 6 meters is a narrow window of our spectrum (3 MHz), I suppose anyone with a lick of sense could tune his antenna to provide a good match if he had to.

The radio as reviewed is good. With the improvements Azden has planned, such as eliminating the two-digit PL tone codes, it will be even better. If they also rewrote the instruction manual, and had one specifically dedicated to the PCS-7500H, it would be better still. [Factory Note: New and improved manuals are in the works.] On a scale of one to 10, with a "10" being perfect, I'd rate the PCS-7500H a strong 8: a good rig for the money and, as I said earlier, maybe the only game in town for a modestly-priced 6 meter FM rig.

Manufacturer's Specifications vs. Bench Measurements

Variable	Specification	Measured
TX output power	50 watts (high)	47-52W (H)
RX sensitivity	<0.35µV/20 dB NQ	0.30µV/20 dB NQ*
Squelch sensitivity	<0.12µV threshold	0.10µV threshold
Selectivity	15 kHz/-60 dB	15 kHz/-57 dB
RX audio output	2W, 10% THD	2.2W, 10% THD
Power consumption	0.6A RX	0.5A RX
Frequency coverage	50.0-53.995 MHz	50.0-53.995 MHz

*Receiver Sensitivity is usually measured in µV/12 dB SINAD. For comparison purposes, the 0.35 µV/20 dB Noise Quieting would be a lower number if measured using SINAD. At 50 MHz, the difference in this specification for anything less than 1 µV is not critical.

Items unspecified by manufacturer, but noted:

Display window bar graph, number of bars illuminated for 50W TX output: 10. For 10W TX output: 3 to 10, varies with frequency and VSWR.

Display-window bar graph used as RX S-meter, number of bars illuminated vs. received signal level:


1 bar	= 0.9 µV (-108 dBm)
2 bars	= 1.2 µV (-106 dBm)
3 bars	= 1.4 µV (-104 dBm)
4 bars	= 1.8 µV (-102 dBm)
5 bars	= 2.0 µV (-101 dBm)
6 bars	= 2.2 µV (-100 dBm)
7 bars	= 3.0 µV (-97.5 dBm)
8 bars	= 4.0 µV (-95 dBm)
9+10 bars	= 5.5 µV (-92 dBm)

Note: The 9th and 10th "bar" in the bar graph display illuminate together. Signal level change from "S1" (1 bar) to "S9+" (all 10 bars) is 16 dB. This makes the resolution extremely good for weak signal beam peaking, but results in "full-scale" readings for any reasonably strong signal. Not uncommon for FM receivers.

ALL ELECTRONICS

Courteous Service · Discount Prices · Fast Shipping

640 X 480 DOT LCD DISPLAY



Sharp # LM64P70

Brand new 640 X 480 dot LCD flat panel display with on board high speed drivers and built-in CCFT back-light (inverter not included). Logic voltage: 5 Vdc. LCD driver voltage: -16.2 Vdc. Viewing area 6.8" X 5.1". Overall module size: 10.1" X 6.23" X 0.33". These displays sold for over \$300.00 new. Includes specs and hook-up information.

\$45.00 each

CAT # LCD-17

JUMBO LEDS JUMBO SAVINGS



Liton # LTL 327C - 8MM

Ideal for eye-catching indicators and displays. A recent quantity purchase of these BIG, 8mm diameter, red diffused LEDs enables us to provide some very special pricing. The leads on these devices have been trimmed to 0.325", leaving plenty of room for soldering. Normally these parts would sell for more than twice our price.

CAT # LED-23


5 for \$1.00

100 for \$15.00
1000 for \$120.00

100 MA. FULL SCALE

Phastron

Large, 4.5" diameter Mil-Spec panel meter. 3.5" dia. viewing area. Zero adjustment knob. White face. Scales in green, black and blue letters. Three AC and three DC volt scales; 0-2.5, 5 and 10. One resistance scale from 0 to infinity. Includes mounting hardware, rubber gasket. 1.25" behind panel depth.



\$7.50 each

CAT # MET-42

OPTO SENSOR



OPTEK # K-3010
0.20" gap.

CAT # OSU-14

2 for \$1.00

ORDER TOLL FREE
1-800-826-5432

CHARGE ORDERS to Visa, MasterCard or Discover

TERMS: Minimum order \$10.00. Shipping and handling for the 48 continental U.S.A. \$4.00 per order. All orders including AK, HI, PR or Canada must pay full shipping. All orders delivered in CALIFORNIA must include local state sales tax. Quantities Limited. NO C.O.D. Prices subject to change without notice.

**CALL, WRITE or
FAX for a Free**

**64 Page
CATALOG**
Outside the U.S.A.
send \$2.00 postage.

MAIL ORDERS TO:
**ALL ELECTRONICS
CORPORATION**
P.O. Box 567
Van Nuys,
California
91408
FAX (818) 781-2653

CIRCLE 194 ON READER SERVICE CARD

73 Amateur Radio Today • August, 1994 25

A Novel Dual-Band, Single Feedline, VHF/UHF Antenna

Good performance for less than a sawbuck.

by Don Schendel W7KOH

The introduction of modern 2 meter/440 MHz dual-band transceivers has ushered in a new era in VHF/UHF amateur antennas. For mobile operation, including handhelds, small helical-wound antennas have been designed to cover both bands for dual operation. Other types, used mostly in mobile applications, include quarter-wave vertical elements (2 meter band) that have a phasing coil positioned at a quarter wave (440 MHz) from the feed point for additional operation on the three-quarter meter band. Both types suffer from basic design deficiencies and various trade-offs associated with these forms.

The basic quarter-wave antenna cut to frequency is a well-behaved radiator when properly configured. Its one drawback is that it will only work on one band. This is where various modifications such as phasing coils, stubs, traps and the like come into play, to make it perform at other bands as well. An old matching trick from the 1950s is resurrected here to enable the design of a dual-band antenna that will allow simultaneous operation on both VHF (146 to 148 MHz)

and UHF (440 to 450 MHz) with reasonably well-behaved characteristics. 147 MHz and 440 MHz were chosen as the design centers by virtue of their relationship to band activity. Notice a key feature here: The two frequencies relate by a factor of 3!

Photo A shows the actual antenna in a vehicle application. This application is good because of the large metal roof that provides a good ground plane for operation. It also provided a good test bed for performance data such as feed impedance, VSWR, antenna pattern, and the like. Photo B shows a close-up of the constructed antenna. Its basic parts are a length of steel piano wire, a small-diameter brass tube, a PL259 connector and some epoxy adhesive or silicone sealant. The total part cost, not including labor, is less than a \$10 bill.

Figure 1 shows the basic relationships involved in the function of the antenna. First,

the antenna functions as a standard quarter wave on the 2 meter band, working into a ground plane—in this case, the vehicle's roof. The feed impedance measured at the base of the antenna is approximately 40 ohms at 147 MHz. The vertical length (L) of the antenna is three-quarter wavelengths at 440 MHz. Length S of the sleeve is a quarter wavelength at 440 MHz (6.5") and is electrically/physically connected to the 50 mil piano wire at the bottom of the configuration. Since I scavenged a short piece (7.0") of nickel-plated brass tube from an old antenna rod that happened to have an outside diameter of approximately 0.35", soldering the wire and cut-bent bottom end of the brass tube was no particular problem. It should be noted that the wire must run down the center of the tube and stay parallel to the inside of the tube for its entire length. The top of the brass tube should be sealed with either a

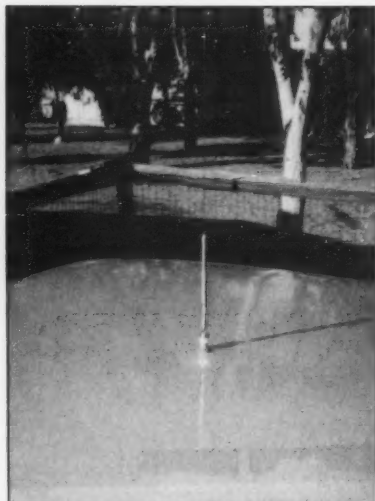


Photo A. The dual-band mobile setup on a truck roof.


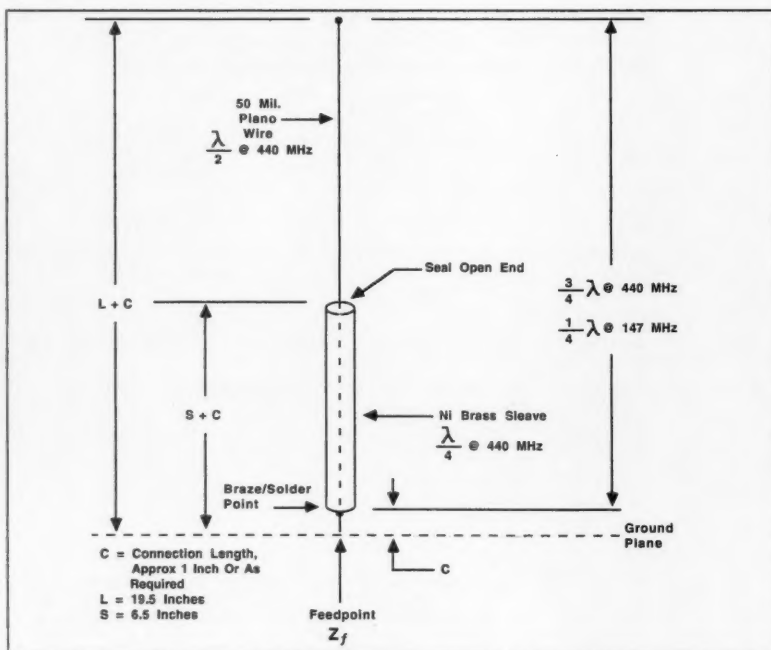


Figure 1. Detailed drawing of the dual-band antenna.

HAM RADIO & MORE

National Talk Radio Show With Len Winkler, KB7LPW

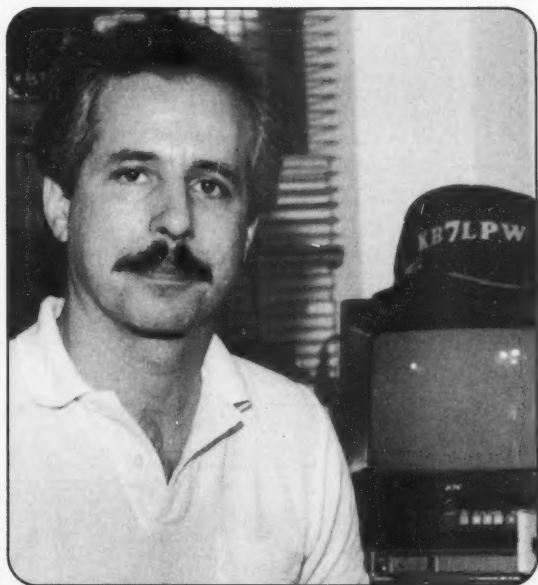

**America's Only
Ham Radio
Show On The
Broadcast
Bands!**

**Sundays
6:00 pm EST**

Weekly Co-Host, John Moore, NJ7E – Weekly DX Update With Lee Finkel, KY7M

Tune in each week for national ham radio news, FCC news, weekly guests from the amateur radio community, ham trivia contests, prizes, listener call-in and more!

Sponsored in part by Radio City, Inc. and *73 Amateur Radio Today*.

"Ham Radio & More" Upcoming Programs

8/7	Open Lines
8/14	Wayne Green W2NSD, Publisher of <i>73 Amateur Radio Today</i>
8/21	Roger Block KD7UT, Owner of Polyphaser Corp.
8/28	John Langner WB2OSZ, Slow Scan Television

Ham Radio & More is also available on Satellite!
Spacenet 3, Transponder 9, 6.8 Audio.

Find out what radio station airs "Ham Radio & More" in your local area
by calling the originating station, KFNN, at 602-241-1510.

For sponsorship information contact Ron Cohen at 602-241-0482.

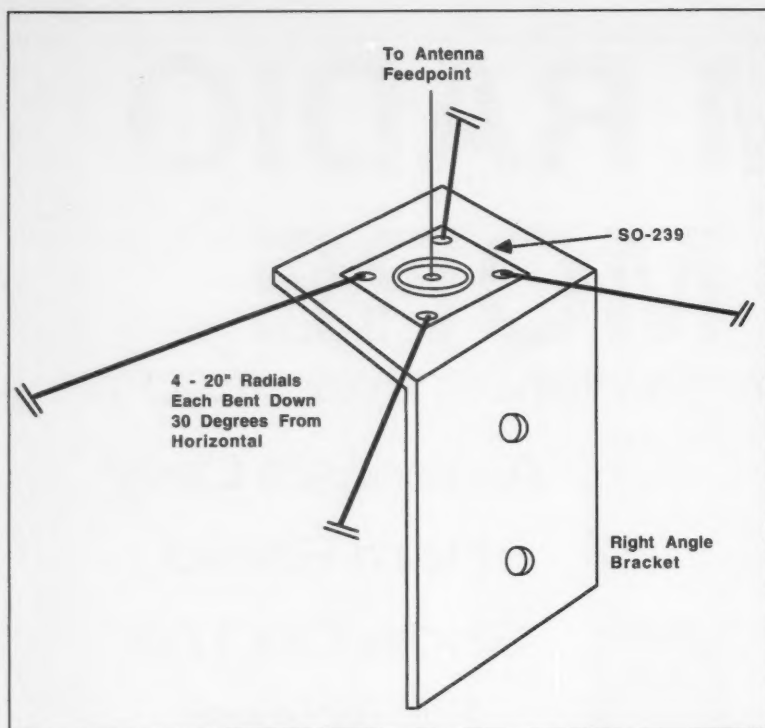


Figure 2. The dual-band antenna set up for a base station.

good grade of epoxy adhesive or silicone sealant. The top end of the brass tube stays "Electrically Open" to the vertical wire!

The brass tube acts as a coaxial sleeve/transformer, sometimes referred to as a "Bazooka," when operated on 440 MHz. The sleeve allows the top portion of the antenna to radiate as a bottom-fed half-wave vertical. The gain is 3 dB greater than a standard 440 MHz quarter-wave antenna. The diameter of the sleeve (tube) is reasonably non-critical and aluminum tubing could be cut and used in place of brass tubing. There is only one problem with aluminum tubing, and that is in the soldering or brazing that is required to join the steel wire and the modified tube end into permanent contact. There are several types of pre-fluxed rods and solders available to do this if you are handy with a shop torch. Otherwise, my recommendation is to scavenge a length of brass or hard-drawn copper tubing for the project, which is much easier to work with. A good rule of thumb is that the ratio of the wire diameter to the outside tubing diameter for reasonably thin-wall tubing is about 10 to 1.

There is nothing difficult or magical about the antenna. It performs well on both bands when properly sized. It is important to cut dimensions accurately. This is true in all antenna configurations, but even more so here because of the transformer properties exhib-

[illegible]

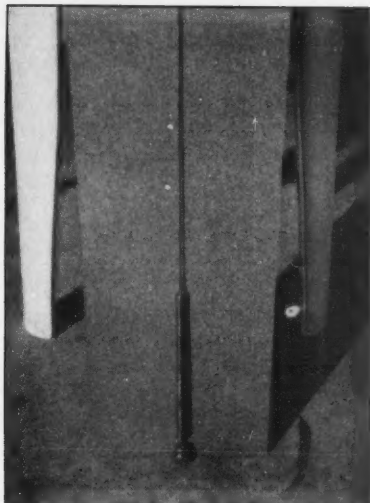


Photo B. A closer look at the dual-band antenna.

ited by the sleeve. Dimensions of antennas become more demanding as the frequency of operation increases. A velocity factor of 97% was used in calculating the quarter wavelengths at each frequency. The operating characteristics on the 2 meter band were plotted, and it was interesting to notice how

- Parts List**
- 5 Standard length (30" to 40") of 0.050" \pm 0.005" steel (or stainless steel) tempered wire, one cut to 19.5" (four radials, each cut to 20"). Source: Any craft, hobby or materials supply store.
 - 1 Standard length (10" to 18") of nickel (Ni) plated brass tube of 0.350" \pm 0.005" (up to 0.500", non-critical), cut to 7.0". Source: Any hardware or material supply store.
 - 1 Two-tube set of standard, generic epoxy. Source: Any craft, hobby or hardware store.
 - 1 Solderable PL259 plug. Source: Radio Shack, item 278-205.
 - 1 Solderable SO239 chassis—mount socket. Source: Radio Shack, item 278-201.
 - 1 Right-angle bracket at least 1" wide. Source: Radio Shack, item 15-888 or hand fabricated from aluminum, brass or mild steel flat stock.

Technical Reference: *The Antenna Engineering Handbook*, 2nd edition or later, by Johnson and Jasik, editors; McGraw-Hill, publisher.

the resistive part of the feed impedance of the antenna behaves over the operating bandwidth. The VSWR is reasonably well-behaved in the operating bandwidth: It is less than 1.5 to 1. On the 440 MHz end, again the feed impedance seems to be reasonably well-behaved and the VSWR is staying below 1.5 to 1. Overall, dual-band operation is good, with no profound surprises. My test transceivers would not allow both 147 MHz and 440 MHz simultaneous transmission, so I was restricted to single emission mode only for both bands.

The antenna is relatively easy to construct and does not demand complex tools to build with. Except for the soldering or brazing step, everything else is either glued with an adhesive or sealed with an RTV type sealant.

The wire can be obtained from your friendly hobby store in 30"-plus lengths. The connector, epoxy and brass tube are available at your local Radio Shack. If you want to use this antenna in a fixed-station mode, don't forget the ground plane! An SO 239 connector on a right-angle bracket makes a good foundation for such an antenna. Four 20" radials (50 mil piano wire) attached to the four corners of the assembly that are bent down 30 degrees with the horizon allow for an almost perfect match of 50 ohms for both bands. Radials must always be longer than radiators by a factor of 2% to 5%. Don't be afraid to experiment and try other construction techniques—this is a good way to optimize an antenna to best fit your personal needs.

Look What You Could Be Missing...

Multiple Heterodynes White/Pink Noise Power Line Noise And More...

DSP Noise Reduction Products From JPS



NRF-7 General Purpose Noise Remover and Filter Unit
Only \$249.95

The NRF-7 reduces atmospheric noise through dynamic peaking. Removes multiple tones from voice signals. High performance "real-time" CW Data and Voice Filters. CW filters have selectable center frequency. State-of-the-Art Digital Signal Processing.



NIR-10 Noise/Interference Reduction Unit
Only \$349.95

The NIR-10 allows reception of difficult to read signals and reduces listener fatigue. Operates on radio receiver audio outputs. NIR mode reduces or eliminates white/pink noise, ignition noise, static interference, and power line noise. PEAK function reduces white noise interference. The Notch Filter mode removes multiple heterodynes and acts in 3 milliseconds. Band Pass mode has continuously adjustable center frequency and features vertical-skirted filters.



NTR-1 Wide Band Noise and Tone Remover
Only \$169.95

The NTR-1 provides wide band operation for AM or FM reception, narrow band operation for SSB, CW or data reception. State-of-the-Art Signal Processing in "Real Time." Rapidly removes multiple tones and atmospheric noise (and other similar noise types) from voice signals. Unit operates on receiver audio output.



NF-60 Notch Filter
Only \$149.95

The NF-60 Notch Filter removes heterodynes, CW, RTTY, tune-ups, and birdies. In fact, it notches out any and all constant or slowly varying tones present in your receiver's audio output signal. Automatically removes multiple tones from voice communications. Uses State-of-the-Art Digital Signal Processing. Built-in speaker amplifier.

115VAC to 12VDC Adapter \$16
(For use with the NIR-10, NRF-7, NTR-1, and NF-60)



JPS Communications, Inc.

P.O. Box 97757, Raleigh, NC 27624
(919)790-1011 FAX: (919)790-1456 TECH: (919)790-1048

First and Finest in DSP Noise Reduction
TOLL FREE ORDER LINE: 800-533-3819

We accept Mastercard, VISA, checks, money orders in US\$.
Free shipping within the continental U.S. \$.50 for C.O.D.

CIRCLE 285 ON READER SERVICE CARD

Design and Build a Dummy Antenna

A 40W, 50 ohm RF dummy load with a VSWR of 1.3:1 at 500 MHz.

by Geoff Koehler VE5ZE

A dummy antenna is one of the most basic and essential pieces of test gear in the ham shack. A good dummy antenna must meet two requirements. First, the dummy must be resistive and not reactive at the frequency of the transmitter. The impedance of most military and amateur transmission lines and equipment is 50 ohms, so it is most useful to build a dummy with a 50 ohm impedance. A 50 ohm dummy must present this impedance to the transmitter for maximum transfer of power and proper tuning of the transmitter. Moreover, to be versatile the dummy should not change impedance significantly as a function of frequency. Second, the dummy must be able to safely dissipate the RF energy supplied by the transmitter as heat, and not radiate RF.

The purpose of this article is to describe the design and testing of two simply-built dummy loads that maintain a more-or-less constant impedance at VHF frequencies, and are able to dissipate the power of handheld amateur radios or low-power mobile rigs. In addition, comparisons are made to the performance of a few commercially available dummy loads, one of which was measured (the MFJ-264 dry dummy).

Back to Basics: The Smith Chart

Basically, the Smith chart is a circular graph (Figure 1) where circles of constant resistance and constant reactance form the grid. The only straight line on the chart is the axis of reals, marked "resistance component," along which are centered the circles of constant resistance (Figure 1a). All the points on a circle of constant resistance have an equal value to where they intersect the axis of reals and represent the resistive component of a complex impedance. Constant resistance circles are tangent to the edge of the chart at the infinite resistance point.

Superimposed on these circles are partial circles of constant reactance (Figure 1b) whose centers lie on a line normal to the axis of reals and are tangent to the axis of reals at the edge of the chart. The layout of the chart allows a complex impedance to be plotted in its two components, a resistive component and a reactive component.

Finally, radial scales complete the Smith chart (Figure 1c). Two scales are calibrated

in terms of wavelength, and form the outer ring of the Smith chart. One is measured as "wavelengths toward generator," and the other "wavelengths toward load." The entire circumference of the chart represents one-half wavelength.

All Smith charts have a characteristic impedance of 1 ohm, and are normalized to the characteristic impedance of the system that you are working with. For example, a 50 ohm transmission line has a normalized value of Z/Z_0 (50/50) = 1. On this scale a resistive 120 ohm load would have a resistive component of $120/50 = 2.4$ ohms. In this way, the same chart can be used for any characteristic impedance.

Any impedance, regardless of value, can be plotted on the Smith chart. Impedances can be generally broken down into two components: a resistive component and a reactive component (either capacitive or inductive). These usually take the form of a com-

"It is also important to use only carbon and not wire-wound resistors because wire-wound resistors will become reactive at high frequencies."

plex number: $Z_a = R_a + jX_a$, where R represents the resistive (real) component and X represents the reactive (imaginary) component. The sign of the reactive component determines whether the reactance is capacitive (negative) or inductive (positive). The completed Smith chart is shown on Figure 1d. Smith charts are also available in expanded form, which is useful when measured impedances all plot close to the center of the chart, or are already normalized to 50 ohms.

The primary use of the Smith chart in this article is to display graphically the complex impedances measured in the dummy loads at VHF frequencies, and convert these impedances to a more familiar form, the calculated VSWR at the transmitter. A good article on the various uses of the Smith chart, written by Jim Fisk W1DTY, appeared in the November 1970 issue of *Ham Radio* magazine (see "References" at the end of this article).

Dummy Load Design

Two dummy loads of different design are considered (Figure 2). While a simple carbon resistor remains resistive to several hundred MHz, a dummy capable of dissipating more than about 2 watts must be built from a number of resistors. At VHF frequencies, most multi-resistor dummies become reactive, as well as simply resistive. Therefore, as the frequency increases the design of the dummy load becomes important.

Both dummies are constructed from about 20 2 watt carbon resistors, some double-sided copper-clad board, and an RF connector. I used a type-N connector, but a BNC connector will work, too. UHF connectors should work up to about 150 MHz, but at higher frequencies these connectors may compromise the performance of the dummy. All other things being equal, UHF connectors should not be used, although they are the most common on amateur equipment. It is also important to use only carbon and not wire-wound resistors because wire-wound resistors will become reactive at high frequencies. One dummy, which I call the DIP dummy, consists of a dual-inline arrangement of resistors, while the other is of radial design.

To build the DIP dummy, 22 1.5k 2W resistors and two pieces of double-sided copper-clad fiberboard are needed (Figure 2a). Both are about 5/8" wide; the top board is 5" long, and the bottom board is 6-3/4" long with a tapered end. For the resistors, a total of 22 small holes are drilled in two rows of 11, about 3/8" apart. Solder the resistors between the two boards. You will have to solder all the resistors on one board first, and then fit the other board onto the resistor leads, and solder. Make sure to use a hefty soldering iron, because good solder joints are important. Mount the RF connector in the aluminum box, and solder the tapered end of the bottom plate directly to the center conductor of the RF connector. The top plate is grounded to the box by a sheet of copper foil which can either be soldered directly onto the top plate or bolted through with 4-40 machine screws. The purpose of the tapered bottom plate and the copper foil is to decrease, as much as possible, lead inductance in the dummy. Finally, mount the bottom plate on an insulating stand-off to the bottom of the aluminum box.

WE SHIP WORLDWIDE

Barry Electronics Corp.

WORLD WIDE AMATEUR RADIO SINCE 1950
Your one source for all Radio Equipment!

KITTY SAYS: WE ARE OPEN 7 DAYS A WEEK
Saturday 10-5pm/Sunday 11-4 pm
Monday-Friday 9 to 6:00 PM
Come to Barry's for the best buys in town



Wherever I go, I take my radio.
Specialist in RADIOS;
Business marine aviation,
ham radios and scanners.

KENWOOD



ANTENNAS
A-S, AES, Cushcraft, Hy-Gain,
Hustler, KLM, METZ, Urban,
MODULOX, TONNA, Butternut,
Multi-Band

"TS-50S", TS450S/AT, R-5000, TS-850S,
TM 241/A441A, TR-751A, Kenwood Service
Repair, TS140S, TS690S, RZ-1, TS-790A,
TS950SD, TH-78A, TH28/48A, TM-941A,
TM-741A, TM-732A, TM-641A, TM-742A.

MARINE RADIOS
ICOM M7, M11, M56, M700TY, M800
AVIATION PORTABLE ICOM A-21
MOTOROLA MARINE KING KX 99

Budwig ANT. Products
FLUKE 77, 83, 85, 87 Multimeters

Linear Amplifier
Ameritron, Icom, Kenwood, Yaesu

Shortwave Receivers

- SONY • GRUNDIG
- SANGEAN • ICOM

Call 212-925-7000

Satellite telephone in suitcase
for worldwide use. WRITE.

ALINCO DJ580T, 120T, 162T,
460T, 180T, F1TH, DR570T, etc.

Wide selection of SW & Amateur
Publications

Telephone scramblers
for cellular and regular
phones. \$299.00 each

CAR Stereo with
Phillips DC-777 @ \$499.95
in stock

ANTENNAS:
AEA AlphaDelta,
ANLI, Antenna
Specialist, Barker &
Williamson,
Comet, Cushcraft,
Diamond, GAP,
Hy-Gain, Hustler,
Larsen, Etc.



(144, 220, 440
MHz), IsoLoop.

EIMAC
3-500Z
572B, 6JS6C
12BY7A &
6146B

BIRD
Wattmeters &
Elements In Stock



Not available for export.



"YAESU Ham and Business Radios"

FT-767GX, FT-890, FT-747GX, FT-990, FRG-8800,
FRG-100B FT-736R, FT-1000D, FT-416/816, FT-530,
FT-5200, FT-2400, FT-470, FT-530- FT-411E

YAESU ICOM
FT-23R/26/76 IC2/3/4SAT
FT411E-811-911 IC02AT/2SRA
FTH-2008/7008 IC2/4GAT/24AT
IC-A21/U16

CONTACT US FOR THE LATEST IN
BUSINESS AND HAM RADIOS,
SHORTWAVE RECEIVERS &
SCANNERS, MOTOROLA, YAESU,
ICOM, KENWOOD, ALINCO,
STANDARD, MAXON, RELM, BENDIX
KING, SONY, SANGEAN



ICW2A
W21AT
P2AT/4AT



IC-H16/U16
IC21A




MOTOROLA RADIOS
COMMERCIAL RADIOS



TH-78A
FT-530

Landmobile HT's
ICOM: U16, H16, V100, U400
MAXON, MOTOROLA,
YAESU: FTH 2008/7008
UNIDEN, REGENCY, KING,
MARINE ICOM: M7, M56, M700
AVIATION ICOM: A21 A200 H.T., TAD



Antenna Tuners:
MFJ, AEA AT-300,
ICOM, KENWOOD,
YAESU.

**COMMERCIAL & HAM
REPEATERS
STOCKED.
WRITE FOR
QUOTES**

Kantronics
KAM PLUS, KPC 2/3/4,
KPC2400, SUPER FAX II,
KPC IV, Data Engine, D4-
10, etc.

MOTOROLA AUTHORIZED DEALER
KACHINA COMMUNICATIONS DEALER
**AUTHORIZED
DEALER**

SONY

Shortwave Radios Stocked
DIGITAL FREQUENCY COUNTERS
OPTOELECTRONICS model 1300 H/A, 0-1300MHz
2300, 2210 H, 0-2200 MHz, 2800H, UTC-3000, 2810

Long-range Wireless
Telephone for export in stock

BENCHER PADDLES
BALUNS, LOW PASS FILTERS
IN STOCK

MIRAGE/RFC Amplifiers
ASTRON POWER SUPPLIES
Belden Wire & Cable, Int'l Wire
OPTO KEYERS STOCKED

**AMPLIFIERS
STOCKED:**
RF Concepts
Mirage
TE Systems

COMET ANTENNAS
STOCKED

**HEIL
EQUIPMENT
IN STOCK**

STANDARD



JRC Short-wave radios
JST135, NRD-535D

Hy-Gain Towers
will be shipped
direct to you
FREE of
shipping cost.

Ameritron Amplifiers
AMERITRON

MAIL ALL ORDERS TO: BARRY ELECTRONICS CORP., 540 BROADWAY, NEW YORK, NY 10012 (FIVE BLOCKS NORTH OF CANAL ST., BETWEEN SPRING & PRINCE ST.)

New York City's

LARGEST STOCKING HAM DEALER
COMPLETE REPAIR LAB ON PREMISES

"Aqui Se Habla Espanol"

BARRY INTERNATIONAL
FAX 212-925-7001 Phone 212-925-7000

Monday-Friday 9 A.M to 6:00 P.M.
Saturday 10- 5pm /Sunday 11- 2pm

IRT/LEX-"Spring St. Station". Subways: BMT-
"Prince St. Station". IND-"F" Train-Bwy Station"
Bus: Broadway #6 to Spring St. Path-9th St./6th Ave.
Station.

**COMMERCIAL RADIOS
STOCKED:** ICOM, Motor-
la, MAXON, Standard,
Yaesu. We serve munic-
ipalities, businesses, Civil
Defense, etc. Portables,
mobiles, bases, re-
peaters...

**ALL
SALES
FINAL**

We stock: AEA, Alinco, Ameco, Ameritron, Antenna Specialist, ARRL,
Astatic, Astron, B&K, Belden, Benchner, Bird, Butternut, CES, Cushcraft,
Daiwa, Elmac, Henry, Heil, Hustler, Hy-Gain, Icom, KLM, Kantronics,
Kenwood, Larsen, Maxon, MFJ, Mirage, Motorola, Nye, Palomar, RF
Products, Shure, Standard, TUBES, Uniden, Yaesu, Vibroflex, Duplexers,
Repeaters, Scanners, Radio Publications

WE NOW STOCK COMMERCIAL COMMUNICATIONS SYSTEMS
HAM DEALER INQUIRES INVITED PHONE IN YOUR ORDER & BE REIMBURSED
COMMERCIAL RADIOS stocked & serviced on premises.
Amateur Radio Courses Given On Our Premises, Call
Export Orders Shipped Immediately.

Technical help offered upon purchase

FAX: 212-925-7001

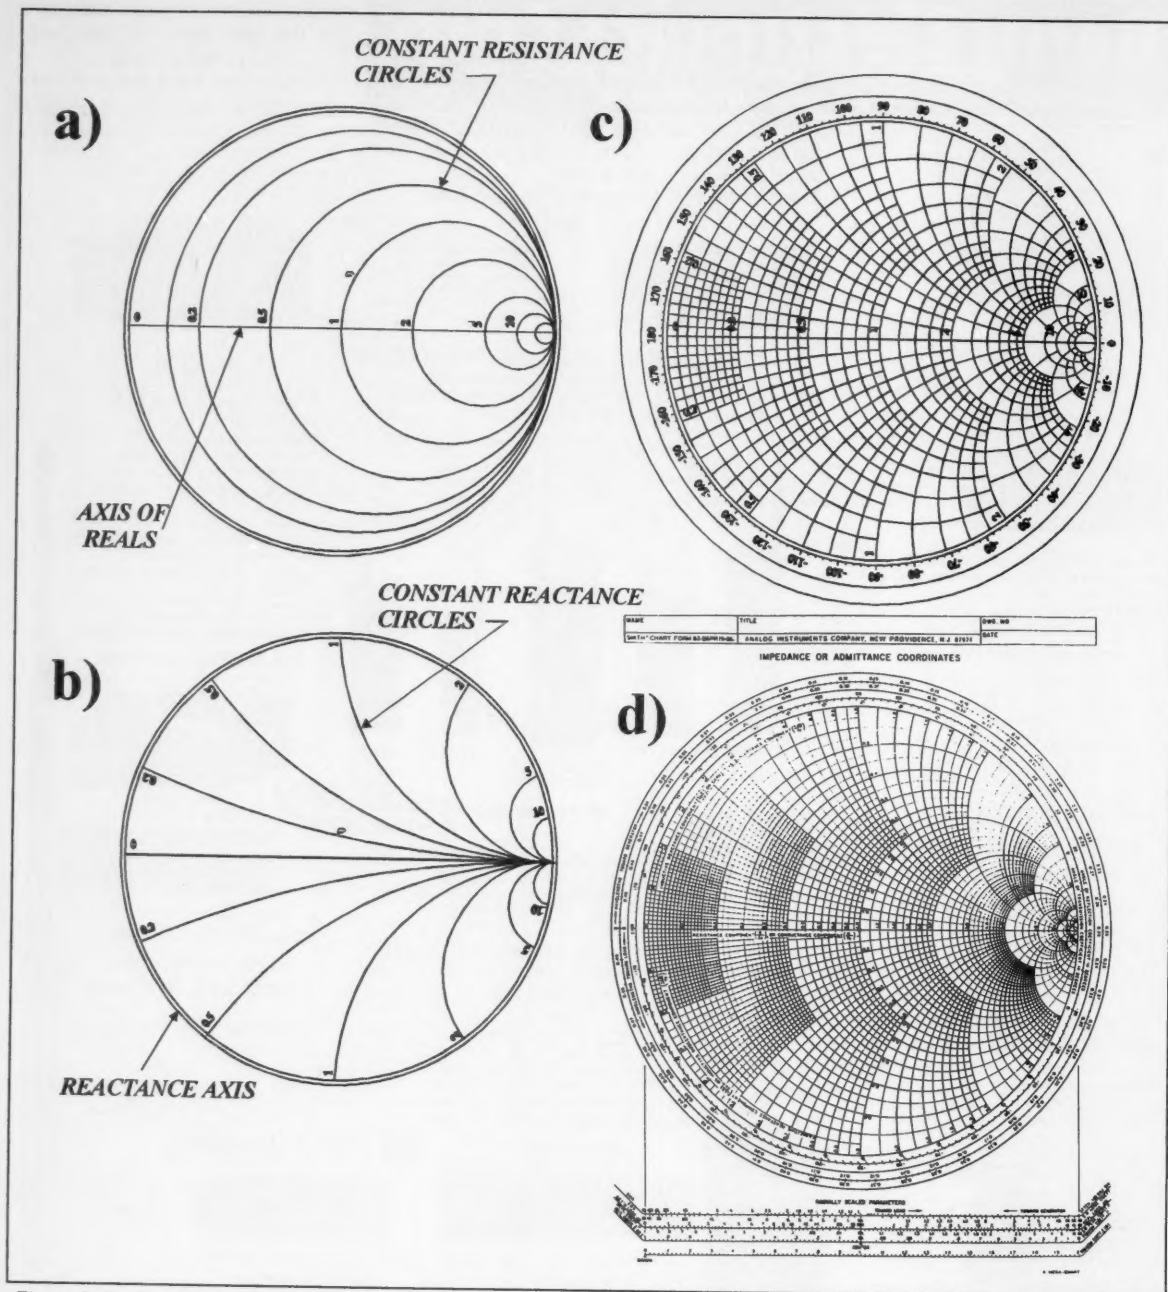


Figure 1. Construction of the Smith chart: a) constant resistance circles; b) partial circles of constant reactance; c) radial scales; d) completed Smith chart. Modified after Fisk, 1970.

The radial dummy is built in a similar manner, except that the RF connector is bolted directly to the ground plate, with the center conductor soldered to the back plate with a piece of large (less inductance) hookup wire (Figure 2b). Twenty 1k resistors are arranged around a 1-1/2" circle. As with the DIP dummy, it would be a good idea to mount the dummy in an aluminum box to help shield the dummy and prevent any grounded surface from contacting the

back plate of this dummy, where there will be RF voltage.

Measurement of Complex Impedance

Measurement of complex impedances can be performed with an impedance bridge and a signal generator. An impedance bridge that, with careful attention to construction, should work at VHF frequencies is described by Henry Keen W2CTK. For the dummy antennas in this article, I used an

alternate setup which consisted of a Hewlett Packard 608A Signal Generator, a power divider, a couple of 10 dB pads, and a Hewlett Packard 8405A Vector Voltmeter (Figure 3).

In this setup, V_A represents the incident voltage only, because the end is terminated in a purely resistive 50 ohm load and therefore there is no reflection. V_B , however, will represent the vector sum of the incident voltage and the reflected voltage. The ratio

MFJ super DSP filter

... Tunable "brick wall" bandpass, lowpass, highpass, notch filters ... programmable pre-set filters ... automatic multiple notch filter eliminates heterodynes ... adaptive noise reduction reduces noise and QRN ... for Voice, CW, Data ...



MFJ-784

\$219⁹⁵



MFJ's super DSP filter automatically eliminates heterodynes, reduces noise and interference *simultaneously* on SSB, AM, CW, packet, AMTOR, PACTOR, RTTY, SSTV, WeFAX, FAX, weak signal VHF, EME, satellite -- nearly any mode you'll ever encounter.

You get MFJ's *tunable* FIR linear phase filters that minimize ringing, prevent data errors and have "brick wall" filter response with up to 60 dB attenuation just 75 Hz away.

Only MFJ gives you *tunable* DSP filters. You can tune each lowpass, highpass, notch and bandpass filters and *vary* bandwidth to pinpoint and eliminate interference. The last tunable filter setting is saved -- it's ready to use when you switch back to it again.

Only MFJ gives you 6 *factory pre-set* filters and 10 *programmable pre-set* filters that you can customize. Instantly remove QRM with a turn of a switch!

You get MFJ's *automatic notch filter* that searches for and eliminates *multiple* heterodynes.

You also get MFJ's advanced *adaptive noise reduction*. It silences background noise and QRN so much SSB signals sound like a local FM repeater.

The *automatic notch filter* and *adaptive noise reduction* can be used with *all* tunable and pre-set filters.

Automatic notch filter

MFJ's *automatic* notch filter searches for and eliminates *multiple* heterodynes in *all* filter modes -- it's so fast interfering CW and RTTY signals are also eliminated.

If you leave the *automatic* notch filter on during a phone contest, you'll never be worn down by the heterodynes of tuner-uppers.

Voice signals aren't degraded. The *narrow* automatic notch is silently working in the background destroying unwanted tones when they appear.

With up to 50 dB attenuation, you'll copy stations that would otherwise be masked by heterodynes. You'll miss fewer calls and be less exhausted when the contest is over.

When you need to *selectively* remove tones -- like when you're enjoying a CW ragchew and a couple of annoying CW stations appear nearby -- you can use the *two* MFJ *tunable* notch filters to completely knock them out.

Adaptive noise reduction

Pressing the "ON" button silences background noise. Some SSB signals sound like a local repeater! It makes noisy FM and AM signals readable and works with CW, Data and other signals.

It works in all filter modes and on all types of random noise including -- white noise, impulse noise, static, ignition noise, power line noise, hiss and atmospheric noise.

The LMS algorithm gives you up to 20 dB of noise reduction depending on the type of noise. You can adjust the amount of noise reduction to prevent distorting some signals.

Reducing random noise reduces fatigue and makes QSOs more fun -- especially, when the band is full of tiring noise.

Tunable highpass/lowpass filters

For Voice and Data nothing beats MFJ's exclusive *tunable* highpass/lowpass FIR linear phase "brick wall" filters.

You can *tune* the lower cutoff frequency 200 to 2200 Hz and the upper cutoff frequency 1600 to 3400 Hz.

Signals just 75 Hz away literally disappear -- they are reduced a *thousand* times, 60 dB!

Unlike other filters, speech clarity is not reduced by envelope distortion caused by unequal time delay.

By adjusting the highpass and lowpass filters you can create *custom* filters for Voice, Data and other modes.

When signals are weak, you can improve copy by removing high and low speech frequencies. They contain little information but are full of noise that reduce readability.

On crowded HF bands, overlapping SSB signals make copying difficult. You can improve copy by slicing off some overlap with razor sharp "brick wall" responses.

You can also highpass filter out hum, pulses, rasp and other irritating low frequency noise.

Tunable bandpass filters

Narrow band signals like CW and RTTY jump out of QRM when you switch in one of MFJ's three *tunable* FIR bandpass filters.

You can *tune* the center frequency from 300 to 3400 Hz. And *vary* the bandwidth from 50 Hz to 680 Hz -- from super tight CW filters to wide razor-sharp Data filters.

As you narrow the bandwidth, interfering signals just drop out because, just 60 Hz away, they're down by over 50 dB.

You can use *narrower* bandwidths to fight tough QRM because these linear phase filters

CIRCLE 86 ON READER SERVICE CARD

don't distort signals with unequal time delays.

Even with the narrowest 50 Hz bandwidth, you'll never have a problem with ringing.

One position gives you *two* tunable filters you can use together on one signal. For example, on RTTY, tune one filter to mark, the other to space and set each bandwidth tight for an incredibly sharp RTTY filter.

16 *pre-set* filters -- use factory set or program your own

With a turn of a switch you can select from *sixteen* convenient *pre-set* filters. You can use them for SSB, AM, CW, packet, AMTOR, PACTOR, RTTY, SSTV, WeFAX, FAX or any other mode you can think of.

If you don't like our *pre-set* filters, you can define your own filter by programming bandpass center frequency and bandwidth, lowpass and highpass cutoffs. *An MFJ exclusive!*

Only MFJ gives you the best of both worlds -- *tunable* filters to eliminate nearly any QRM and fast convenient *pre-set* filters customized for any mode.

Plus more ...

A push-button quickly bypasses your filter so you can hear the *entire* unfiltered signal and see if anyone is calling you.

Built-in two watt amplifier. Has volume control, input level control, speaker jack, headphone jack, accessory jack, PTT line and PTT sense and line level output. 9x2 1/2x6 in.

It plugs between your transceiver or receiver and external speaker or headphones. Use 12 VDC or 110 VAC with MFJ-1315, \$14.95.

No Matter What™ guarantee

You get MFJ's famous one year No Matter What™ *unconditional* guarantee. That means we will repair or replace (at our option) your MFJ-784 *no matter what* for a full year.

Call your dealer for your *best* price

Automatically eliminate heterodynes, reduce noise and QRM on Voice, CW and Data. Call your favorite dealer for your *best* price and order your MFJ super DSP filter today!

Free MFJ Catalog

Write or call toll-free ... 800-647-1800

Nearest Dealer/Orders: 800-647-1800
Technical Help: 800-647-TECH (8324)

• 1 year unconditional guarantee • 30 day money back guarantee (less s/h) on orders from MFJ • Free catalog

MFJ ENTERPRISES, INC.
Box 494, Miss. State, MS 39762
(601) 323-5869; 8-4:30 CST, Mon-Fri
FAX: (601) 323-6551; Add \$8 s/h

MFJ ... making quality affordable

Prices and specifications subject to change © 1994 MFJ Enterprises, Inc.

Whether you DX or ragchew, Pride Tubes can help you be heard

- 100% RF Tested
- Industry's Best Warranty
- Competitive Prices



High-Quality vacuum tubes including:
 12 BY7A 811A 3-500C
 6146B 572B 3-500Z

Look for us at the Huntsville
 Hamfest August 20-21

RF TESTED
PRIDE
 TUBES

8200 South Memorial Parkway
 Huntsville, AL 35802
 Telephone 800 638 3925
 or 205 650 5522
 FAX 205 880 8077

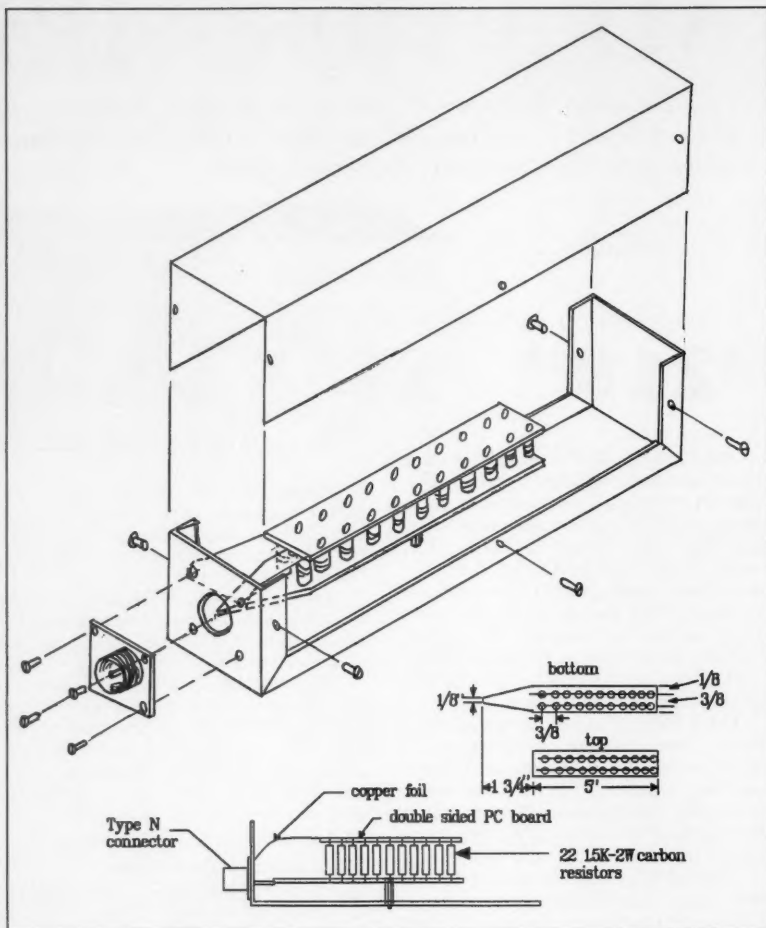


Figure 2 (a). Construction detail of the "DIP" dummy.

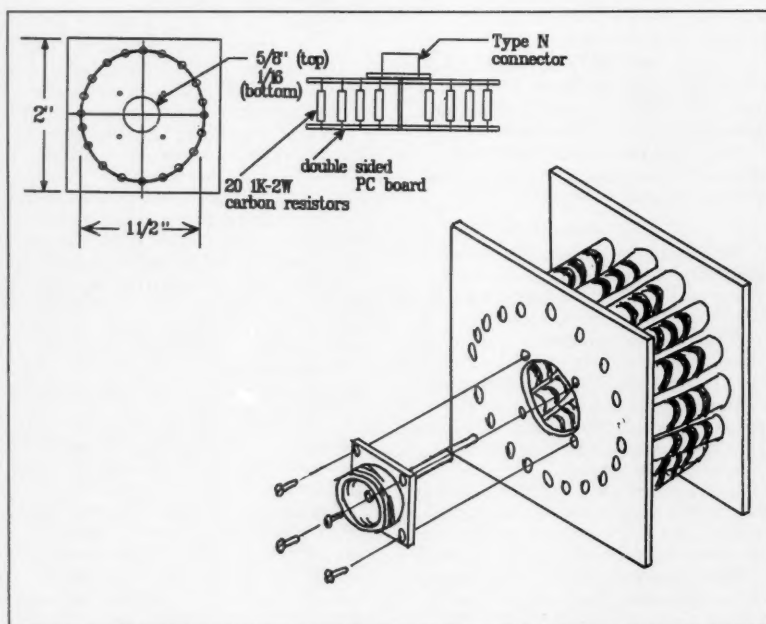


Figure 2 (b) Construction detail of the radial dummy.

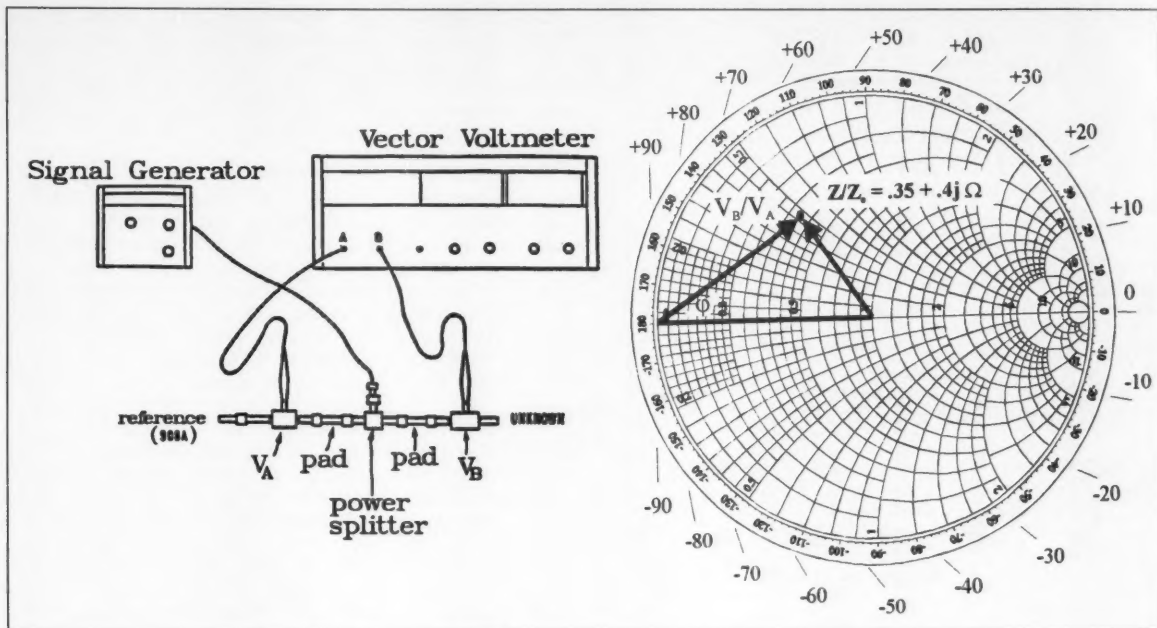


Figure 3. Complex impedance measurement using the Vector Voltmeter.

V_B/V_A is the vector voltage ratio between a 50 ohm resistive load and the load under test. This is the resistive (or real) component of the complex impedance of the load. To find the reactive component, the phase difference (m) between V_A and V_B are measured. If V_B lags V_A , the reactive (imaginary) component is capacitive and the phase difference is negative; if V_A leads V_B it is inductive and the phase difference is positive. These two measurements, V_B/V_A and

$\phi B-A$, can be plotted on the Smith chart (Figure 3). This task is then repeated for a variety of frequencies to calculate the impedance of the load as a function of frequency.

Results

Measured complex impedances of these two loads are shown in Figures 4 and 5. The DIP load remains essentially resistive up to about 10 MHz, after which it becomes reac-

tive to a maximum VSWR of 1.5:1 at 100 MHz. Because it has a DC resistance of 68 ohms, there is a small mismatch with 50 ohm equipment at low frequencies (VSWR = 1.4:1). The experimenter may be able to get better results at VHF frequencies by simply clipping off pairs of resistors with a pair of diagonal cutters. However, this will probably result in a higher VSWR at low frequencies. This aside, this dummy is surprisingly good, and should be usable up to about

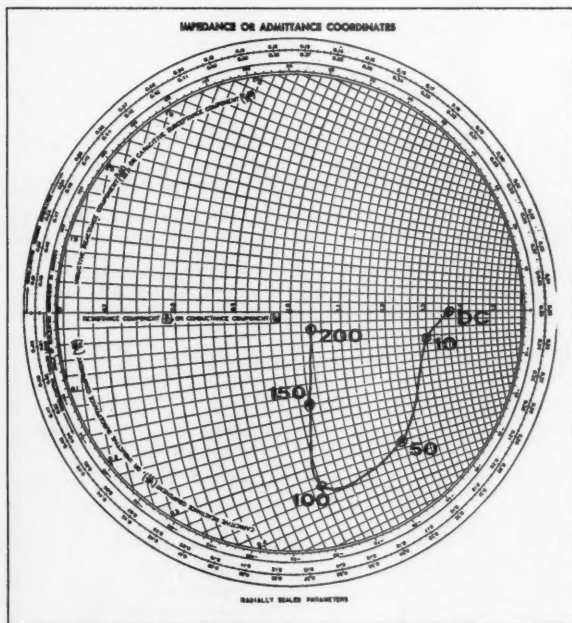


Figure 4. DIP dummy impedance from 0 to 200 MHz. The Smith chart is in expanded form.

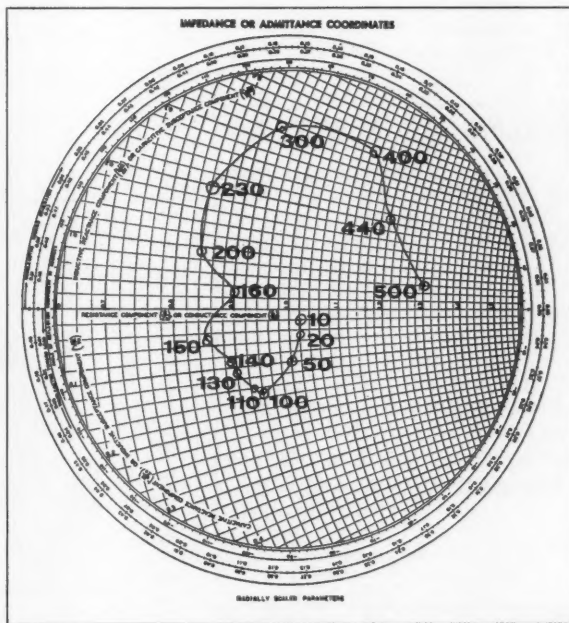


Figure 5. Radial dummy impedance from 10 to 500 MHz. The Smith chart is in expanded form.

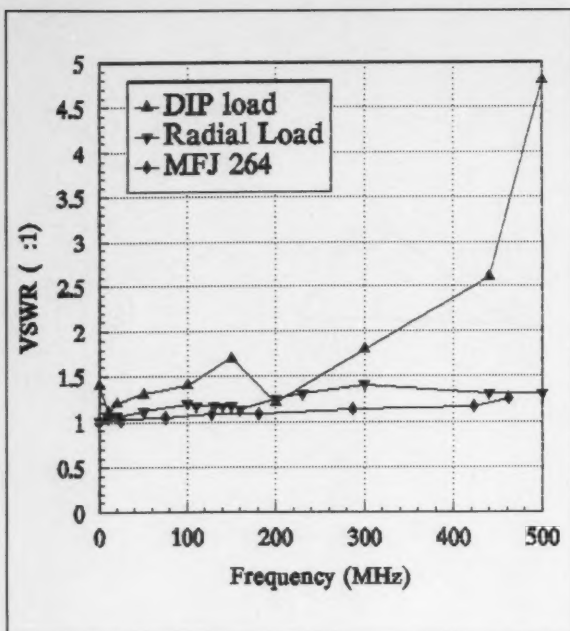


Figure 6. VSWR of dummy antennas at various frequencies. Included for comparison is the MFJ 264 dry dummy.

200 MHz. At 300 MHz (not shown) the dummy becomes very reactive, resulting in a calculated VSWR of greater than 4:1!

The radial load displays excellent characteristics, even well up to the 300 MHz region, reaching a VSWR of 1.2:1 at 300 MHz. At 500 MHz (the limit of my signal generator) the VSWR is 1.3:1.

For comparative purposes—the impedance as a function of frequency of a commercial load—the MFJ-264 was measured in the same way as those constructed in this article. Up to 500 MHz, the VSWR of this dum-

my remains below 1.3:1, as claimed by the manufacturer (Figure 6). For completeness, a summary, of the impedance, etc., of a few other commercially-built dummy loads, along with those described here, are compared in Table 1.

Conclusions

Multi-resistor dummy loads at VHF frequencies can be reactive and result in considerable VSWR and mismatch to the transmitter. For this reason, those dummies designed for HF operation may not be suitable for proper tuning of VHF and UHF transmitters. Therefore, design becomes important in that the simple DC resistance of a dummy is not the total impedance presented to the transmitter, especially at VHF. Two designs are offered here that are easy to build and result in a dummy that is usable into VHF, are well below the price of commercial loads of comparable quality. The major drawback of these dummies is that they cannot be used continuously with high-power transmitters. For short periods of time, say up to about two minutes, you can use these dummies with 100W HF rigs but they will get hot. Experience has shown that about two minutes of keydown at 80W will melt the solder on the dummy!

Acknowledgments

I would like to thank the members of the Institute of Space and Atmospheric Studies at the University of Saskatchewan, who were nice enough to loan me their Vector Voltmeter, and always had the time to answer my questions.

References

1. Jim Fisk W1DTY, "How to Use the Smith Chart," *Ham Radio*, November 1970, p. 17.
2. Henry Keen W2CTK, "A Simple Bridge for Antenna Measurements," *Ham Radio*, September 1970, p.34.

Table 1. VSWR of Dummy Loads from 0-500 MHz

Dummy	0-100 MHz	200 MHz	500 MHz	Power**(W)	Price***
Ten Tec 239	1.1:1*	1.1:1*	2:1*	75	\$60
MFJ 260 B	1.3:1*	1.5:1*	—	90	\$30
MFJ 262	1.5:1*	—	—	200	\$80
MFJ 264	1.1:1 (<1.3:1)	1.1:1 (<1.3:1)	1.3:1 (<1.3:1)	75	\$60
DIP	1.3:1	1.1:1	5:1	40	\$10
Radial	1.2:1	1.2:1	1.3:1	40	<\$10

* Manufacturer's specifications: Where both manufacturers specifications and measured values are available, the manufacturer's values are shown in parentheses.

** Continuous duty.

*** Prices approximate.

COLLINS 30S1 POWER AMP



1 KW LINEAR AMPLIFIER amplifies signal from KWM-2A and similar S-Line equipment to 1000 W PEP using 4CX1000A/8168 PA tube (not included). Requires 80 W PEP SSB and 60 W PEP CW drive power. Manually tuned in

five band selections; 115/230 VAC power supply. Military surplus "winged" label; Not "like new"! 30.6x17x16.8, 200 lbs sh.

USED—not tested/less PA tube.... \$900.00

4CX1000A/8168 TUBE, used—"lab tested", \$195 w/PA purchase

Prices F.O.B. Lima, O. • VISA, MASTERCARD Accepted. Allow for Shipping • Write for latest Catalog Address Dept. 73 • Phone 419/227-6573 • Fax 419/227-1313

FAIR RADIO SALES

1016 E. EUREKA • Box 1105 • LIMA, OHIO • 45802

CIRCLE 75 ON READER SERVICE CARD

VECTOR FINDER

ZERO-IN THE SIGNAL!

HAND-HELD PHASE SENSE ANTENNAS FOR VHF DIRECTION FINDING. USES ANY FM XCVR. COMPASS GIVES DIRECTION. ARMS FOLD FOR STORAGE. TYPE VF-142 COVERS BOTH 2-MTRS & 220MHZ. OTHER MODELS AVAILABLE. WRITE OR CALL FOR MORE INFO.

\$3.50 SHIPPING & TYPE VF-142
CA. ADD TAX) **\$139.95** 619-
RADIO ENGINEERS 565-1319
3941 MT. BRUNDAGE AVE.
SAN DIEGO CA. 92111

CIRCLE 58 ON READER SERVICE CARD

SAM Amateur Radio Callsign Database

Find Hams quickly and easily by Callsign or by Name. Search for a specified City, State, or Zip Code. Print with standard or customized output. Ideal for mailing lists, QSL's etc. **NEW FOR '94**, search filters that allow you to specify FIRST NAME, LICENSE CLASS, AGE, ADDRESS, or CALL SUFFIX, AREA, OR PREFIX.

SAM Option files include County Cross Reference, License Expiration Date, Full Date of Birth, Previous Calls and Date First Licensed.

Requires IBM Compatible PC, 17.5 MB of hard drive space, and high-density floppy drive.

NOW AVAILABLE ON CD-ROM

Disk Version \$39.95 CD-ROM \$39.95
SAM OPTIONS \$7.50 each
Shipping and Handling \$5.00

RT SYSTEMS, INC

8207 STEPHANIE DRIVE, HUNTSVILLE, AL 35802
1-800-723-6922 or 1-205-882-9292
Visa, MasterCard or Discover

SCARED OF THE CODE?

IT'S A SNAP WITH THE ELEGANTLY SIMPLE MORSE TUTOR ADVANCED EDITION FOR BEGINNERS TO EXPERTS—AND BEYOND

Morse Code teaching software from GGTE is the most popular in the world—and for good reason. You'll learn quickest with the most modern teaching methods—including Farnsworth or standard code, on-screen flashcards, random characters, words and billions of conversations guaranteed to contain every required character every time—in 12 easy lessons.

Sneak through bothersome plateaus in one tenth of a word per minute steps. Or, create your own drills and play them, print them and save them to disk. Import, analyze and convert text to code for additional drills.

Get the software the ARRL sells and uses to create their practice and test tapes. Morse Tutor Advanced Edition is approved for VE exams at all levels. Morse Tutor is great—Morse Tutor Advanced Edition is even better—and it's in user selectable color. Order yours today.

For all MS-DOS computers (including laptops). Available at dealers, thru QST or 73 or send \$29.95 + \$3 S&H (CA residents add 7.75% tax) to:


GGTE, P.O. Box 3405, Dept. MS,
Newport Beach, CA 92659
Specify 5 1/4 or 3 1/2 inch disk
(price includes 1 year of free upgrades)



CIRCLE 193 ON READER SERVICE CARD

CornerBeam?

SWR < 1.2:1 across the band
Gain of a 15 ft Yagi
No dimension over 7 ft
40 dB Front-to Back Ratio
60° Half-power Beamwidth
Mounts directly to mast
Vertical or Horizontal Polarization
2meters \$145, 220 MHz \$145, 70 cm \$115, Dual 146/440 \$165
Weights only 10 lbs. Add \$11 Shipping & Handling. Info \$1.



AntennasWest
Box 50062 Provo UT 84605

Order HotLine
801 373 8425

CIRCLE 380 ON READER SERVICE CARD

EVERY ISSUE of 73 on microfiche!

The entire run of 73 from October, 1960 through last year is available.

You can have access to the treasures of 73 without several hundred pounds of bulky back issues. Our 24x fiche have 98 pages each and will fit in a card file on your desk.

We offer a battery operated hand held viewer for \$75, and a desk model for \$220. Libraries have these readers.

The collection of over 600 microfiche, is available as an entire set, (no partial sets) for \$285 plus \$5 for shipping (USA). Annual updates available for \$10.

Your full satisfaction is guaranteed or your money back. Visa/MC accepted.

BUCKMASTER PUBLISHING

"Whitehall"
Route 4, Box 1630

Mineral, VA 23117

703-894-5777

800-282-5628

CIRCLE 168 ON READER SERVICE CARD

THE ADVANTAGES OF BUYING AZDEN

When you buy an FM mono-bander, factory-direct from Azden (2, 6, 10, 220, 440), or a headset, you'll enjoy these great advantages:

FACTORY-DIRECT SUPPORT: Engineers and technicians from our factory perform all service, and our "all ham" sales staff has years of experience.

RELIABILITY: Designed to MIL-STD-810, Azden radios are commercial grade and virtually "maintenance free".

COMPATABILITY: For Packet, CAP and MARS.

TWO YEAR WARRANTY: Everything is covered the first year, and we only charge for labor in the second year.



MOBILES


PCS-7000H	2 Meters
PCS-7200	220 MHz
PCS-7300H	440 MHz
PCS-7300HD	440 MHz
PCS-7500H	6 Meters
PCS-7800H	10 Meters

HANDHELDS

AZ-11	10 Meters
AZ-61	6 Meters
AZ-21A	2 Meters

HEADPHONES

HS-03	With Boom Mic
DM-10	Without Mic

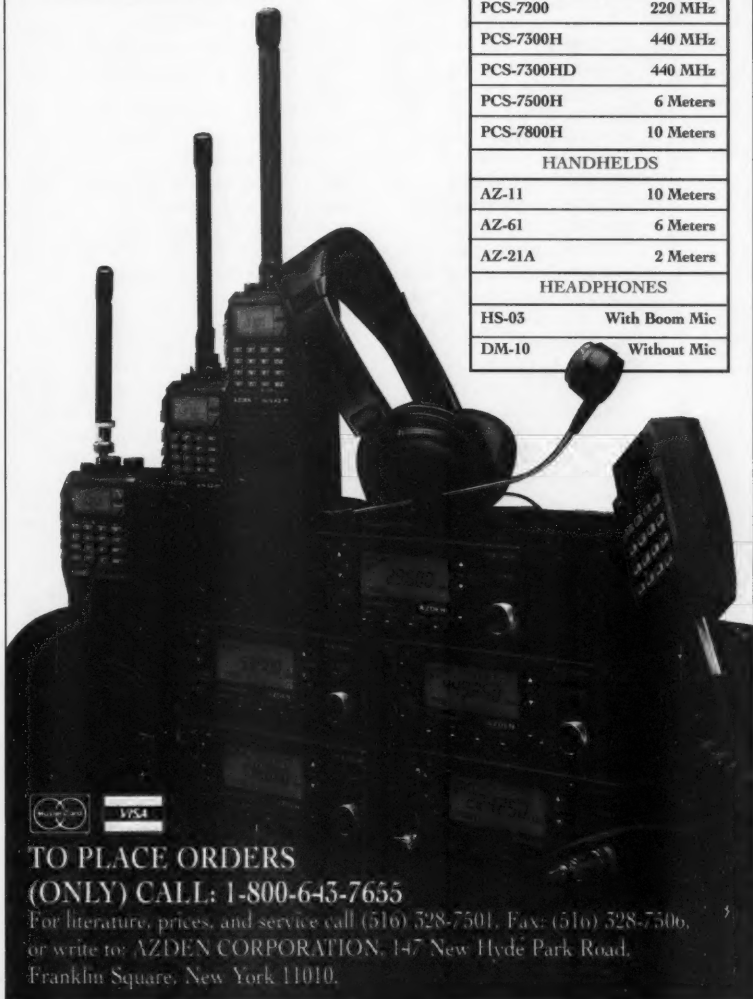

TO PLACE ORDERS

(ONLY) CALL: 1-800-643-7655

For literature, prices, and service call (516) 528-7501. Fax: (516) 528-7506.
or write to: AZDEN CORPORATION, 147 New Hyde Park Road,
Franklin Square, New York 11010.

The Drake SW8 World Band Shortwave Receiver

R.L. Drake Company
230 Industrial Drive
Franklin OH 45005
Telephone: (513) 746-6990
Fax: (513) 743-4576
Price Class: \$599

A constant companion, at home or on the go!

There are table-top SWL receivers and there are portable SWL receivers. Being a hardware hound, I was never very much impressed by portable SWL receivers. They always seemed lacking in size, weight, sound, etc. Then along came the new Drake SW8, a semi-portable SWL receiver.

What is a semi-portable receiver? First, the term semi-portable is mine, not that of the R.L. Drake Company, manufacturer of the SW8. Second, it is a receiver equally at home on my radio operating table as it is on a picnic table at a campground, on the roof of my car at the airport, or in a motel room.

Physically, the SW8 is not a lightweight (it weighs a little

over 10 pounds with batteries) and it certainly won't fit in your shirt pocket. But, it will perform on a par with most table-model World Band receivers costing at and above its price class.

For portable use, the SW8 uses a built-in 41" whip antenna or other external antenna of the user's choice, and is powered by six "D" cells. For fixed use, the unit is powered by an AC adaptor and connected to the world via any number of antenna types that can be connected via PL-259 coaxial connector, or by wire-type terminal connector.

Features

The SW8 comes loaded with top-of-the-line features, yet is so very simple to look at and operate. The front panel consists of an ON/OFF VOLUME control, TONE control, TUNING knob and a multi-purpose key pad. It's similar to its more expensive relative, the R8, but don't let the simplicity fool you—this is a very powerful receiver.

The Liquid Crystal Display (back-lit, amber-

colored) shows: frequency, bar-graph-type S-meter, band, AGC, memory, clock, mode, bandwidth, and more. Readability is excellent due to the generous size of the display.

The SW8 receives the shortwave, AM broadcast, FM broadcast, and AM aviation bands (Air Band).

Receive bandwidths are panel-selected at: 2.3, 4, and 6 kHz, making it easy to limit adjacent channel interference.

There are 70 programmable memories which will store all user-selected parameters including mode, frequency, bandwidth, and AGC. These memories can be selected by number or tuning control, and they can be scanned.

A selectable AM synchronous mode reduces the effects of fading.

There is selectable (fast/slow) AGC.

A large carrying handle doubles to hold the front of the receiver up, for viewing ease.

There is AM squelch for the aviation band (on the rear apron).

Direct digital frequency entry is possible via the keypad.

It has an FM stereo headphone jack and an external mono speaker jack.

Antenna selector switches on the rear apron allow the use of several different antennas.

The Manual

The operator's manual for the SW8 is adequate for most users, but it is lacking in specific technical information, block or schematic drawings, and an explanation of the theory of operation. However, the operational instructions are very complete, and at no time was I at a loss in the operation of the receiver.

A convenient log for listing the programmed memories is included in the back of the manual.

Operating the SW8

I found the SW8 very easy and enjoyable to operate. Simplicity is the best word to de-



ID-8 Automatic Morse Station Identifier


Compatible with Commercial, Public Safety, and Amateur Radio applications. Uses include Repeater Identifiers, Base Station Identifiers, Beacons, CW Memory Keyers, etc. Great for FCC ID Compliance.

- Miniature in size. 1.85" x 1.12" x 0.35".
- Totally RF immune.
- All connections made with microminiature plug and socket with color coded wires attached.
- CMOS microprocessor for low voltage, low current operation: 6 to 20 VDC unregulated at 6ma.
- Low distortion, low impedance, adjustable sinewave output: 0 to 4 volts peak to peak.
- Crystal controlled for high accuracy.
- Transmitter PTT output (to key transmitter while ID is being sent), is an open collector transistor that will handle 80 VDC at 300ma.
- Field programmable with SUPPLIED keyboard.
- Confirmation tone to indicate accepted parameter, plus tones to indicate programming error.
- All programming is stored in a non-volatile EEPROM which may be altered at any time.
- Message length over 200 characters long.
- Trigger ID with active high or low.
- Inhibit ID with active high or low. Will hold off ID until channel is clear of traffic.
- Generates repeater courtesy tone at end of user transmission if enabled.
- Double sided tape and mounting hardware supplied for quick mounting.
- Operating temperature range, -30 degrees C to +65 degrees C.
- Full one year warranty when returned to the factory for repair.
- Immediate one day delivery.

Programmable Features

- Eight programmable, selectable, messages.
- CW speed from 1 to 99 WPM.
- ID interval timer from 1-99 minutes.
- ID hold off timer from 0-99 seconds.
- CW tone frequency from 100 hz to 3000 hz.
- Front porch delay interval from 0 to 9.9 seconds.
- CW or MCW operation.

\$89.95 each
programming keyboard included



COMMUNICATIONS SPECIALISTS, INC.
426 WEST TAFT AVENUE • ORANGE, CA 92665-4296
(714) 998-3021 • FAX (714) 974-3420
Entire U.S.A. (800) 854-0547 • FAX (800) 424-3420

CIRCLE 10 ON READER SERVICE CARD

Amateur Software and Hardware for the Commodore User

ART-1

ART-1: A complete interface system for send and receive on CW, RTTY (Baudot & ASCII) and AMTOR, for use with the Commodore 64/128 computer. Operating program on disk included. **\$199.00**

AIR-1: A complete interface system for send and receive on CW, RTTY (Baudot & ASCII) and AMTOR, for use with Commodore VIC-20. Operating program in ROM.

\$99.95

AIR-1

SWL

SWL: A receive only cartridge for CW, RTTY (Baudot & ASCII) for use with Commodore 64/128. Operating program in ROM. **\$69.95**

\$69.95

AIRDISK: An AIR-1 type operating program for use with your interface hardware. Both VIC-20 and C64/128 programs on one disk. **\$39.95**

\$39.95

AIR-ROM: Cartridge version of AIRDISK for C64/128 only. **\$59.95**

\$59.95

MORSE COACH

MORSE COACH: A complete teaching and testing program for learning the Morse code in a cartridge. **\$49.95**

For C64 or C128. **\$39.95**
VEC SPECIAL

\$49.95

\$39.95

AIRDISK

G AND G ELECTRONICS
OF MARYLAND


8524 DAKOTA DRIVE, GAITHERSBURG, MD 20877

(301) 258-7373



CIRCLE 169 ON READER SERVICE CARD

YOUR GATEWAY TO THE WORLD.

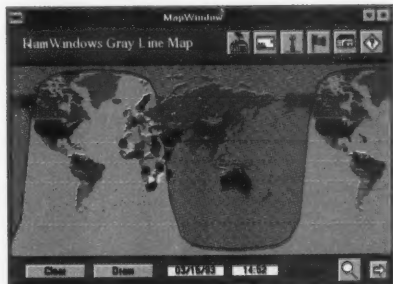

The Gray Line Map is a part of HamWindows 2.3 and HamWindows Plus. clicking on any region of the world will bring up one of the 31 regional maps.

HamWindows broadens the experience of Amateur Radio operations, opening a visual interpretation of the world you now only hear. Our interactive computer software programs, in essence, gives you a passport to the world.

The low-cost entry-level software program; HamWindows Radio Construction Set gives you the freedom to build, and control your

Amateur Radio Station.

If you're a power operator, then HamWindows 2.3 is for you. Receive the Radio Construction Set, TNC window and a selection of full color screens which allows you to access a computerized station log, Gray Line Map, CIA World Fact Book and SWL window.

HamWindows Plus 3.0 gives you all the features of HamWindows 2.3

with SVGA compatibility, new awards tracking and reporting, and much more. The idea of a Personal Communications Control Center becomes a reality, all in this easy-to-use software program.

All three of our programs have both VHF and HF control for your TNC's and radio. They're compatible with Kenwood, Yaesu and ICOM radios to make

HamWindows a sophisticated link to your Amateur Radio station.

Please contact us or your local dealer for more information on any of our programs.

HamWindows, Inc.

2121 E. Pacific Coast Hwy., Suite 120C
Corona del Mar, California 92625
(714) 729-4222 FAX (714) 644-6277
CompuServe: 72714, 3514 BBS: (714) 729-4237
InterNet: bgregg@calsoft.com

CIRCLE 345 ON READER SERVICE CARD

scribe its operation, but do not equate simplicity to limited performance.

For testing purposes, I used a Carolina Windom antenna (available from The Radio Works, 804-484-0140) at my station location, and a selection of active antennas for portable use. In general, I found the built-in whip antenna to be of limited use for world-band reception. It was, however, excellent for AM and FM broadcast and the Air Band.

I was first impressed by the receiver's excellent tonal quality. There is a real presence to the sound reproduction and the TONE control has real authority. Voices seem to leap out at you.

The receiver is very quiet, with no discernible internally-generated noise from the microprocessor (an unfortunate side effect too often heard in modern receivers).

There are three methods of direct frequency selection on the SW8:

1. Selection can be made by manually rotating a tuning knob.
2. Or, press the UP or DOWN frequency buttons that step through the bands at 10 kHz or 9 kHz (selectable on the AM broadcast band), 100 kHz on the shortwave bands and FM broadcast band, and 12.5 kHz on the Air Band. Digital readout is displayed to 100 cycles. Stepping is continuous while either button is held down.
3. Also, you can use direct digital entry via the keypad. This is extremely handy for quick movement from one frequency to another.

Strong adjacent channel interference can be reduced by use of the ATT (attenuate) control and proper selection of bandwidth. To some extent the audio TONE control will help also.

The receiver selects the proper antenna for the band chosen, based upon selections made from switches on the rear apron. For example, I connected the Carolina Windom to the SO-239 connector as antenna one and switched the shortwave antenna select switch to #1. I then put the FM/air antenna select switch on whip. Thus, when changing from shortwave to FM broadcast or the Air Band, the receiver chooses the correct antenna.

Although not used in this test, the #2 antenna connector is designed for wire termination and provides connection for 300 ohm VHF antennas and a choice of 500 or 50 ohm shortwave antennas. *[Manufacturer's Note: Although it is not marked on the cabinet, this unit also has a balun on the VHF antenna terminals. You can attach a 75 ohm antenna by connecting one lead to either terminal and the other to ground.]*

The beep tones produced when the keys are pressed helps to monitor what the receiver is doing. For example, the beeps are coded by length and note to indicate different functions or error conditions.

My test site is located about 14 miles from two regional airports (one shared with a military reserve unit). I found no problems in receiving most aviation-related communications using the built-in whip antenna. For a quick

"It does its job very well and has outstanding audio. It will serve well on a desk, and being portable only makes it more versatile."

check of the current weather conditions at the airports, I switched to the Automated Terminal Information Service (ATIS) frequency.

When listening to international broadcasts I found that the choice of bandwidths aided considerably in interference elimination. Also, there were times when I used the ATT control. The fidelity from the speaker was very pleasing to me, particularly when listening to music (true not only for shortwave, but for local broadcast also). The AM SYNCHRONOUS feature does very well in reducing the effects of fading; however, the receiver's frequency must be set very accurately for proper use. If you set the frequency incorrectly, you will be reminded by a whistling sound.

Using SSB (single sideband), I was able to listen to the amateur radio bands. This allowed me to monitor the various nets I participate in, while away from my station. Here

again I noted that the audio appeared to really jump out at me.

The 70 memory locations are all user-programmed and will store frequency, mode, bandwidth, AGC setting, attenuator selection, and synchronous detector (if chosen). When a memory is selected, the tuning knob can be used to tune up or down from the memory frequency.

Scanning is done by memory block, by time. There are six blocks of 10 memories each. Each frequency is checked for five seconds. Memory positions can be tagged for SKIP, and will not be checked during scanning.

The internal clocks (two 24-hour units) allow for local and UTC time to be selectively displayed. I set them to WWV, and when I rechecked them two weeks later, they were on the money. The times can be set to act as a clock radio with wake-up and good-night features, or as event features capable of selecting specific memories at user-programmed times.

While testing the receiver in preparation for this review I found the SW8 could easily become a constant companion. It was my alarm clock, window to the world, monitor of the HF amateur radio bands, airport buddy, and reproducer of Country Western music when I tired of all else.

Recommendation

Drake has done a nice job with the SW8 receiver. It does its job very well and has outstanding audio. It will serve well on a desk, and being portable only makes it more versatile.

I do, however, have two recommendations for improvement to the receiver:

1. Provide a means of covering the selector switches on the rear apron to make them dirt- and sand-proof.
2. Install a preamp for use with the built-in whip antenna when tuning the World Bands.

Overall, I can comfortably recommend this receiver. It does what it is supposed to, and does it with class!

73

WEATHER FAX
Satellite & HF FAX for IBM / Clones



Shown with optional 20 LED Tuning Aid

Features: Processes WEFAX, VIS & IR NOAA, METEOR, APT, 240LPM, 120LPM & HF WEFAX. Connects to Computer Line Printer Port. The software was created by Dr. Ralph E. Taggart, WB8DAT. For details see Chapter 5, Fifth Edition of the *Weather Satellite Handbook*.

Complete Kit Only\$159.95
Assembled & Tested\$189.95
Optional 20 LED Tuning Aidadd \$ 40.00
CA res. add 7.75% sales tax. S&H: \$6.50 (insured). Foreign orders add 20%. For catalog send legal size SASE (52c) to:

A&A Engineering
2521 W. La Palma #K • Anaheim, CA 92801
(714) 952-2114 • FAX: (714) 952-3280

MasterCard VISA

The World of Ham Radio
Callsign May 94 Database



The World of Ham Radio CD-ROM includes the FCC amateur call sign database. Scan over 750,000 US ham calls in just seconds with CALLSIGN. A D-Base data file is also included for all your special callsign application needs. You will receive the latest releases in ham radio software programs covering all the amateur categories from programmers all over the world. Let CDVIEW guide you while viewing over 7,000 IBM program files, over 1,000 radio mods, and thousands of SWL frequencies. Available by subscription three times a year in May, September, & January for \$99 US, \$109 Foreign. May 94 issue \$40 plus shipping: USA \$3, Overnight USA \$10, Foreign airmail \$5, AmSoft, PO Box 666, New Cumberland, PA 17070-0666 USA FAX: 717-938-6767

\$40
CD-ROM

VISA MasterCard

AmSoft 717-938-8249

CIRCLE 113 ON READER SERVICE CARD

All Aluminum

Chassis Kits	Rack Shelves
Cabinet Kits	Rack Equipment Cabinets
Assembled Cabinets	Antenna Grounding Kits
Slope Box Kits	Tower Mounted Box Kits
UHF & VHF Antenna	Dipole Hangers
Power Divider Kits	Other enclosures

Small sheets Aluminum and Brass

Byers Chassis Kits
Charles Byers K3IWK
5120 Harmony Grove Road, Dover, PA 17315
Phone 717-292-4901
Between 6PM and 9:30PM EST. Eves.
"Distributorship Available"

CIRCLE 222 ON READER SERVICE CARD

Specifications

Frequency Range	500-30,000 kHz (0.5 - 30 MHz) 87-108 MHz (commercial FM band) 118-137 MHz (aviation band)
Modes	AM, USB, LSB modes (0.5-30 MHz) AM mode only for 118-137 MHz FM mode only for 87-108 MHz
Sensitivity	SSB: <5 μ V (.5-30 MHz) AM: <2.0 μ V (.5-30 MHz) AM: <4.0 μ V (118-137 MHz) FM: <4.0 μ V (87-108 MHz)
Frequency Stability	+/-10 ppm (0-50 degrees C)
Frequency Accuracy	#+/- 100 Hz (at 25 degrees C)
Selectivity AM/SSB	6 kHz at -6 dB (<12 kHz at -60 dB) 4 kHz at -6 dB (<9 kHz at -60 dB) 2.3 kHz at -6 dB (<5 kHz at -60 dB)
IF Frequencies	AM/SSB 1st IF: 55.845 MHz 2nd IF: 455 kHz FM 1st IF: 10.7 MHz (single conversion)
Image Rejection	>60 dB (.5-30 MHz) >60 dB (118-137 MHz) >50 dB (87-108 MHz)
IF Rejection	>80 dB (1st IF) >80 dB (2nd IF)
Dynamic Range	>95 dB at 20 kHz spacing SSB 2.3 kHz bandwidth
IP3 Intercept Point	>+10 dBm at 20 kHz spacing >-20 dBm at 5 kHz spacing
AGC Performance	Threshold 1.0 μ V Attack Time 1 mSec Release Time Slow: 3 sec Fast: 300 mSec <4 dB change in audio output for 100 dB RF input change, referenced from the AGC threshold point.
Internal Antenna	41" metal telescoping whip (all bands)
Antenna Inputs	0.5-30 MHz: S0-239 (50 ohm coaxial connector) or three-terminal compression connector for either 50 ohm or 500 ohm and ground connection. 87-108 MHz: 300 ohm balanced input 118-137 MHz: 300 ohm balanced input
Audio Output	2.0 watts into 4 ohm speaker at less than 5% distortion with a 9 VDC supply voltage. Line audio output is 300 m Volts at 4.7k ohms.
DC Power Requirements	Input: 7-10 VDC at 1 amp. Can be supplied from AC Adaptor, external DC power supply, or (6) internal "D" cells.
Operating Temperature	00 to + 50 degrees C
Weight	10 lbs. (includes AC Adaptor, batteries NOT included)
Dimensions	11.5" x 5.25" x 13" (WHD)
AC Adaptor	Input 120 VAC at 15 watts, output 9 VDC at 1A (as supplied)



CABLE X-PERTS, INC.

	COAX	100FT/UP	500FT
FLEXIBLE 9913 UV RES DIRECT BURIAL JACKET	.62/FT	.59/FT	
9913 EQUAL UV RESISTANT JACKET	.47/FT	.43/FT	
RG 213/U MIL-SPEC DIRECT BURIAL JACKET	.34/FT	.32/FT	
RG 8/U FOAM 95% BRD UV RESISTANT JACKET	.32/FT	.30/FT	
RG MINI 8X BLK, CLR or SILVER JKT (UV RES)	.16/FT	.15/FT	
RG 58/U SOLID CENTER CONDUCTOR	.15/FT	.13/FT	
RG 58/U STRANDED CENTER CONDUCTOR	.17/FT	.15/FT	
RG 142/U DBL SILVER BRD TFLON	1.30/FT	1.10/FT	
RG 214/U DBL SILVER BRD IIA JACKET	1.50/FT	1.30/FT	
RG 11/U FOAM PE SOLID CENTER 95% BRD	.42/FT	.40/FT	
450 OHM LADDER LINE 18GA SOLID CW COND	.12/FT	.11/FT	
72 OHM HEAVY DUTY TWIN LEAD 12GA STRD	.27/FT	.25/FT	
300 OHM HEAVY DUTY TWIN LEAD 18GA STRD	.15/FT	.13/FT	
LMR 600 LOW LOSS (LIKE 1/2" HARDLINE)	1.47/FT	1.45/FT	
LMR 400 LOW LOSS (SIMILAR TO 9913)	.62/FT	.60/FT	
LMR 240 LOW LOSS (MINI 8 SIZE)	.37/FT	.35/FT	

ROTOR CABLE

STANDARD DUTY (8 COND) 2/16 6/22 UV RES.	.20/FT	.18/FT
HEAVY DUTY (8 COND) 2/16 6/20 UV RES JKT	.35/FT	.33/FT
18GA 4/C GRAY PVC JACKET	.15/FT	.13/FT
18GA 7/C GRAY PVC JACKET	.19/FT	.17/FT

ANTENNA WIRE

14GA 168 STR SUPERFLEX UNINSULATED	.14/FT	.12/FT
14GA 7/22 HARD DRAWN BC UNINSULATED	.08/FT	.07/FT
14GA SOLID "COPPERWELD" UNINSULATED	.07/FT	.06/FT
DACRON ROPE DBL BRD 3/16" 770# TEST	.12/FT	.10/FT

BALLS

W2AU 1:1 or 4:1 1.8-40MHz TRANSFORMER TYPE	\$21.00/EA
W2DU 1:1 1.8-30MHz CURRT TYPE DIPOLE OR BEAM	\$23.00/EA
ORIGINAL GSRV KIT	\$28.00/EA

WIRE

10GA 2/C RED/BLK 25FT \$10.00 50FT \$20.00 100FT \$38.00	
12GA 2/C RED/BLK 25FT \$7.50 50FT \$15.00 100FT \$28.00	
1" TINNED COPPER BRAID 10FT \$10.00 25FT \$20.00 100FT \$75.00	
1/2" TINNED COPPER BRD 25FT \$12.00 50FT \$24.00 100FT \$40.00	

CONNECTORS

PL 259 SILVER/TEFLON/GOLD TIP 10PKS \$11.00 25PKS \$25.00	
"N" CONNECTOR SILVER/GOLD TIP 10PKS \$32.50 25PKS \$75.00	

MORE ITEMS STOCKED...

CABLE & WIRE CUT TO YOUR SPECIFIC LENGTH!

ORDERS ONLY: 800-828-3340

TECH INFO: 708-506-1886

FAX: 708-506-1970
113 McHenry Rd., Suite 240
Buffalo Grove, IL 60089-1797
For Complete Literature Mail SASE

Isn't Your Radio Worth The Investment?
Protect It With



THE PACK-IT
FROM TRANSEL TECHNOLOGIES



Protect your HT's, Cellular
Phones, Pagers, and any other devices you
carry that may be subject to damage.

The PACK-IT is made of 1/4" neoprene
material which is safety belt sewn to the
nylon protective backing. The PACK-IT
doesn't fray like many other materials and
is safe to wash whenever needed.

The strap and 2" beltloop is made from
commercial grade webbing and is secured
in the front with a Velcro hook and loop
assembly.

The PACK-IT doesn't wear the radio like
leather and protects the radio from the
small falls which occurs in everyday
usage. The neoprene material is a cushion
material which not only covers the radio
but also protects it. Various sizes
available so call for the size to fit your
need.

Made In The USA!

\$15.95 + \$3.00 S&H
1 (800) 829-8321

Dealers Welcome

by Larry Antonuk WB9RRT

JPS Communications, Inc.

P.O. Box 97757

Raleigh NC 27624-7757

Telephone: (919) 790-1048; Fax (919) 790-1456

Order line (800) 533-3819

Price Class: \$249.95

JPS Communications' NRF-7

Clean up your audio with state-of-the-art DSP!

"Real hams don't use audio filters." This was the prevailing wisdom, at least until a few years ago. If you were using an "add-on" audio CW filter, for instance, it simply meant that you were too cheap to spring for the optional narrow crystal IF filter that went into your rig. Even worse, it might have meant that your rig was so cheap that it didn't even have an option for different IF bandwidths! Heavens!

A narrow crystal IF filter was obviously the way to go—as long as money wasn't a concern. An IF filter would produce steeper "skirts" than an audio filter, and prevent adjacent signals from overloading the AGC circuits and wiping out your receiver entirely. Audio filters were also prone to "ringing." While they

might enable you to pick signals out of a pile-up, the very act of listening to a cheap audio CW filter for an entire contest could drive an operator bananas. (Imagine listening to someone hitting a steel pipe with a wrench—with your head underwater.)

It's hard to get rid of preconceived notions, but audio filters are not what they once were. The main reason, of course, is that it's now a digital world. The NRF-7 from JPS Communications makes use of technology that was non-existent (or economically unavailable) just a few years ago. But what makes a digital audio filter better than a conventional analog audio filter?

The main function of a filter is just what the name implies—it filters out unwanted signals.

An IF filter does this at the IF frequency by providing a low impedance at the main IF frequency, and higher impedance as the frequency varies from the center frequency. Obviously, the faster the impedance goes up as the frequency varies from the main IF frequency, the sharper the response of the filter (the steeper the "skirts"). In other words, the sharper the filter response, the thinner the "slice" of band that the filter will pass.

An audio filter works in a similar manner, except that it operates on the audio tones from the speaker rather than the IF frequencies. For instance, an audio filter configured for CW might have a center frequency of 800 Hz. It will provide little or no attenuation at 800 Hz, but the attenuation will increase

WE DON'T BUILD THE MOST, WE JUST BUILD THE BEST!

- Our LM-470D is now re-designed to hold 15 ft. of antennae at 70 mph!
- Tri-Ex builds the finest in crank-up, free-standing or guyed towers.
- All towers are complete with rigid concrete base mount.

CALL FOR DISCOUNTS ON SELECTED MODELS!



Tri-Ex®

TOWER CORPORATION

7182 Rasmussen Ave. • Visalia, CA 93291

Celebrating our 40th year

with the best values ever!

TO ORDER CALL
800-329-2393

TECH SUPPORT
209-651-7859


FAX 209-651-5157

CIRCLE 22 ON READER SERVICE CARD

pauldon

ASSOCIATES

210 Utica Street Tonawanda, NY 14150 (716) 692-5451

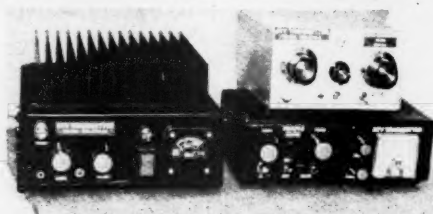

POWER AMPS & PREAMPS

AM & FM 2.0 Mhz - 1.2 Ghz, 2.0 Mhz - 2.3 Ghz

\$75.00 to \$450.00

Special Power Amplifiers for "Rabbit" Linear

ATV Transmitters - Transceivers -
Down Converters 70 CM Up

HTS Systems - "900 Mhz" 10-15 W. Output
FM

Bricks on Boards 2 Mtrs. through 1.2 Ghz
Others products inc. ATV samplers

Write or call for catalog

CIRCLE 339 ON READER SERVICE CARD

RADIO ELECTRONICS AND COMMUNICATION TECHNOLOGY MADE EASY—NO SHORTCUTS!!

- > FULLY UNDERSTAND THE BASICS—STEP-BY-STEP
- > BOOKS PACKED WITH DETAILS, EXPLANATIONS AND ILLUSTRATIONS—EXCELLENT FOR SELF AND CLASSROOM STUDIES:

1. Matter, Energy, and Direct Current
2. Alternating Current and Transformers
3. Electronic Tubes and Power Supplies
4. Solid State Devices and Power Supplies
5. Amplifiers
6. Wave-Generation Circuits
7. Propagation, Transmission Lines and Antennas
8. Amplitude and Phase Modulation
9. Microwave

\$11.75 each

Plus \$.75 eac S&H
(FOREIGN ORDERS S&H \$1.50)

30-DAY MONEY-BACK GUARANTEE

Call Today: 1-800-300-3294 ext/sec 6137

MC/VISA ACCEPTED or
SEND CHECK/M.O. (NO C.O.D.) TO:

LATHROP PUBLICATIONS

P.O. BOX 207
UPPER MARLBORO MD 20773

CIRCLE 197 ON READER SERVICE CARD

VIDEO SYSTEMS

MINI-CAMERA

Size: 1x1x2 in. Weight: 2.5 oz.
Power: 7-14V/80mA. Sens: 2 lux @ f1.8
Lens: 3mm, 4mm. Output: NTSC @ 1V.
The camera has been used in: ATV, Security and Surveillance, R/C airplanes and Robots!
\$269 +s/h

TRANSMITTER, 434MHZ.

ATVM-70, a 80mW. Mini-size 1x1.3 in., 2.5 oz.
Power: 7-9.6V/80mA.

\$129 +s/h

*Satisfaction
Guaranteed!*

DOWN-CONVERTER

For 434 MHz. Low noise
MOSFET front-end for
greater sensitivity. Output
on TV channels 3-4.
\$89 +s/h

**Order Now,
from stock!
(800) 473-0538**

or (714) 957-9268
for technical
information.

MICRO VIDEO PRODUCTS

1334 S. Shawnee Drive, Dept H
Santa Ana, CA 92704-2433

CIRCLE 30 ON READER SERVICE CARD

TOLL
FREE

1-800-666-0908

PRICING AND
ORDERS ONLY

KENWOOD



CALL FOR ALL KENWOOD

YAESU



CALL FOR ALL YAESU
RADIOS & ACCESSORIES

ICOM




CALL FOR ALL ICOM

AZDEN



STANDARD



CALL FOR ALL STANDARD

ALINCO



CALL FOR ALL ALINCO

AEA • ASTRON • AZDEN • COMET
• CUSHCRAFT • DIAMOND
• KANTRONICS • MFJ • SANGEAN
• SONY SHORTWAVE • DRAKE
GRUNDIG • MANY MORE...

NEW EQUIPMENT PRICING AND ORDERS 1-800-666-0908 OUT OF STATE
TECHNICAL, USED GEAR, INFO 203-666-6227 24HR FAX 203-667-3561

Hours:

M-F 10-6,
SAT. 10-4

LENTINI COMMUNICATIONS INC.

21 GARFIELD STREET, NEWINGTON, CT 06111



C.O.D.s Same Day
OK Shipping

CIRCLE 234 ON READER SERVICE CARD

73 Amateur Radio Today • August, 1994 43



greatly at 750 and 850 Hz, increasing as the tones move away from the center frequencies.

The ideal filter would have attenuation that would increase to infinity as soon as the desired cutoff frequency was reached (a vertical "skirt"). In the reality of analog circuitry this is not possible, due to circuit design considerations, component tolerances, and financial problems. In either the IF or the audio filter, then, the attenuation increases gradually, rather than sharply, as the frequency moves off from center frequency. But what if we didn't have to deal with the design problems of filters made with toroids, or active IC circuits? What if we were just dealing with numbers? As an example, what if instead of filtering the audio signal we just fed it into an analog-to-digital converter, and wound up with a stream of numbers? We could then analyze the stream of numbers and determine what was useful, and what wasn't.

In our CW example, we could just check and see what numbers were part of the 750 to 850 Hz bandwidth that we desired. If a number came along that wasn't part of this desired slot, we'd just toss it out. We could then feed the stream into a digital-to-analog converter, and reconstruct the audio. A microprocessor would be able to make the necessary decisions at an extremely fast rate—much faster than the audio frequencies involved. In addition to decisions on bandwidth, the system can also identify unwanted carriers or white noise, making for an exceptional filtering system.

Features

The preceding discussion provides an extremely simplified explanation of Digital Signal Processing (DSP), the main component of the JPS NRF-7. This is the equivalent of saying "Exploding fuel makes an automobile move." It's true, but somehow you get the sense that it's a little more complicated than that. The best part about DSP is that you don't really have to know anything about Fourier transforms and sampling rates to appreciate it—any more than you need to know about fuel injection in order to drive to work in the morning. As a matter of fact, installation of the NRF-7 is a lot easier than driving to work in the morning. RCA-type jacks on the rear of the unit connect to the receiver output and the speaker, and a coaxial power plug is used to

provide 12 VDC to the unit. Once hooked up, the front panel power switch controls the on/off function, a mode switch lets you select the type of filtering to apply, and a bypass switch lets you take the filter in and out of the circuit.

The 10-position mode switch allows various combinations of SSB and CW filters, both wide and narrow, along with notch, peak, and data filters. Filter use is best accomplished by first leaving the filter out of the circuit, and tuning in the desired signal. A front panel signal LED provides a means of determining if the signal is in the desired passband—simply tune until the LED flashes along with the signal of interest. At this point, select the proper mode and press the bypass button, activating the filter. The LED will continue to blink along with the desired signal, but the vast majority of surrounding signals will be gone. (When listening to a CW signal in a pileup, it's difficult to remember that the BYPASS button is hooked to your filter. It seems more like it's hooked to the power plugs on all of the offending transmitters!) Obviously, the filter can be left in as you tune along, but it's nice to put it in and out of circuit, if only to keep in mind how much of a dramatic difference it makes. CW operators will have a choice of 400, 800, or 1000 Hz center frequencies to accommodate rig variations and personal preference.

In addition to the CW and SSB modes, the NRF-7 also has a DATA mode. This mode uses a passband of 500 Hz, centered at 2200 Hz to accommodate standard RTTY mark and space tones. The DATA mode is just as impressive as the CW mode. During tests of the unit during a recent RTTY contest, it was impossible to tune in more than one signal at a time, even in intense pileups.

The other two modes available are PEAK and NOTCH. The PEAK mode provides a constantly varying peak around whatever signal happens to be in the passband, reducing the audio bandwidth to the minimum required for the given signal.

The NOTCH function is one of the more interesting features on the filter. Your first response after flipping to the NOTCH position might be "Hey . . . where's the notch adjustment?" In other words, how do you adjust the frequency of the notch? Well, you don't. The DSP chip knows what a carrier sounds like, and simply removes it. Or them. No trying

to fiddle with the notch control, or shifting the receiver IF—the tones just disappear. As a matter of fact, tune to a CW pileup, hit NOTCH, and all you'll hear will be a series of clicks. The DSP circuitry gets rid of all of the tones in the audio, leaving just a short click as the filter starts to kick in. Obviously, this means that there is no way to use the NOTCH filter in the CW or DATA modes, but due to the performance of these filters the NOTCH filter isn't necessary.

The only drawback noted in the entire review process relates to the fact that the NRF-7 is designed to be placed in-line with the speaker audio. In fact, it has a built-in 2 watt amplifier to drive the speaker you disconnect from your rig (and headphones, via the front panel jack). This works well for the CW and SSB modes, but for us RTTY fans it presents a problem. Audio from the filter needs to be passed to the RTTY decoder, such as a PK-232, but then there's no way to hook up a speaker. If you normally use headphones this doesn't present a problem, but you may have to hook up a small switching or pad arrangement to make things work with both a speaker and decoder. A second output port on the NRF-7, perhaps at line level, would have made interfacing a little easier for AMTOR, RTTY and HF packet types. Provisions are made, however, for changing the input impedance to a high or low level by on-board resistor changes.

The only other shortcoming is the fact that the NRF-7 is indeed an audio filter. While it can do some truly amazing things with receiver audio, it won't help the actual selectivity of the receiver. In other words, you might be carefully separating two QRP CW signals when some guy kicks in his kilowatt, 200 Hz up the band. Your QRP signals are history. In the same manner, the unit won't make up for front-end deficiencies in a cheap receiver. The NRF-7 is pretty amazing, but it won't do miracles.

Documentation

Documentation with the unit is adequate, even more than might be needed due to the simplicity of operation. A troubleshooting chart is included, listing most of the basic problems likely to be encountered when first hooking up a perfectly good unit—the plug-in power supply is bad, you've used the wrong audio plug, the speaker connections are tarnished, etc.

If things are a little more serious there is a schematic included, but it covers only the power supply and audio input/output sections. (The actual Digital Processing Section is shown only as a block diagram since, according to the manual, the digital section is "virtually impossible to troubleshoot without highly specialized equipment." Well, sure, but what isn't these days?? As it turns out, the factory will send a complete digital schematic to any product owner who is interested enough to ask for one. In any case, there's no reason to be overly concerned with repairs—the NRF-7 is very well built, and is covered by a one-year parts and labor warranty.



\$545* for
2 Day
Delivery

*Up to 12 lbs. in Continental USA

1-800-426-2891

Fax (612) 786-6513

**Call for Catalog
Ask for Ext. 22**

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



SUMMER SIZZLER

ICOM \$199.95 with coupon See page 3

KENWOOD \$297.62 with coupon See page 5

FREE NiCad See page 7

ALINCO \$558.55 with coupon See page 8

ALINCO ELECTRONICS INC.

YAESU

GREAT VALUES

PRESENTING

RealTrak
by Northern Lights Software

Quick, simple to use, color/mono EGA/VGA in map mode. Priority tracking of up to 10 birds. Supports ST and KC Tracker. Split screen tracking of multiple objects, EME support! Doppler shift shown for Engineering beacons. Morse reporting. Sky noise map. Squint and solar angle calculations, printer support, and more.

\$64.95

KANTRONICS KPC-9612

Coming Soon!

Kantronics KPC-9612 patterned after the successful KPC III, this product will give you both 9600 & 1200 baud packet with a small footprint. CMOS design allows for battery operation. Optional 32K, \$229.95* Mail Box available.

*This device has not been approved by the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased until the approval of the FCC has been obtained.

COMET CMX Family

This new cross needle S.W.R. meter gives forward and reverse readings without switching and provides for three different power levels. You can even monitor your 12 volt power source. The remote R.F. sensor allows you to place the meter near you and the sensor at the radio.

CMX-1 1.8 to 60 MHz @ 2 KW \$189.95

CMX-2 1.8 to 200 MHz @ 200W \$179.95

CMX-3 140 to 512 MHz @ 200W \$169.95

SUMMER SIZZLER

HA-4S

This multi-band HF mobile antenna comes factory equipped for 10, 12, 15, 40 meters with 20 meters optional (L14HA). This antenna is rated for 200W input and features a hinged base to ease car porting or parking ramp access. The antenna is shown attached to the RS-820 low profile trunk lip mount.

\$157.70

COMET

Comet offers a wide selection of single, dual, triple band antennas for your needs. Be it Base, mobile or HT's, these antennas offer a wide variety of gain, matching mounts and cable assemblies. T6 duplexers are available with and without leads.

TIMEWAVE

NEW DSP-59+ in Stock

DSP-9 \$169.00

DSP-9+ \$219.00

DSP-59+ \$299.00

COMET Mobiles

Comet offers a new SB5 and SB7 NMO-style dual-band antenna. They feature a fold-over "Motorola" style base, great styling and performance to match. Use the SB5 for more compact installations and the SB7 for those hard-to-reach locations.

- B-20** Dual band standard and NMO mount 2.15/5.0 dbi \$49.95
- SB7NMO** Dual band NMO mount 4.5/7.2 dbi \$79.95
- SB5NMO** Dual band NMO mount 3.0/5.5 dbi \$55.95
- FL-67S** Dual band premium construction 4.5/7.2 dbi \$89.95

COMET RS-820

The RS-820 is a new adjustable low profile trunk lip mount antenna base offering style with rugged design.

RS-820 \$34.95

Also shown

- RS-9** trunk lip mount \$13.95
- RS-25** \$32.95

COMET Duplexers/Triplexers

Comet produces over eighteen combinations of duplexers and triplexers. These units are available with and without lead-in cables and feature high power handling with low loss.

- CF-514J** 50/146/446 MHz \$69.95
- CF-4130** 446/1200 MHz \$75.95
- CF-4160J** 146/46 MHz \$49.95

Many more to choose from!

COMET Whips

Dual band whips for your HT will extend your range. Comet makes a version for most every need.

- CH-720C** 2m/70cm center load \$37.95
- SH-55** New! 2m/70cm \$32.95
- CH-72S** Chrome base 2m/70cm \$32.95

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD

Not Responsible For Typographical Errors.

1

Expires
September
1994



Prices Subject To Change Without Notice.



\$545* for
2 Day
Delivery
*Up to 12 lbs. in Continental USA

1-800-426-2891

Fax (612) 786-6513

**Call for Catalog
Ask for Ext. 22**

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



**Coupons
Expire
9/30/94**



Here's the H.F. rig you've been holding out for! It features a full 100 watts output from 160 meters, 100 watt through 6 meters with a built in antenna tuner and power supply, VOX, PBT, RF Gain, 101 memories and more provides you with the latest features and fun.

\$1879⁹⁵




This advanced transceiver features DDS, dual antenna ports, dual VFO display, 101 memories, internal antenna tuner, built-in keyer and 105 dB dynamic receive range. Join the DX scene with the latest design.

• IC-737 w/o VOX available @ \$1249.95 with coupon

\$1479⁹⁵



This new satellite dual band all mode base is designed to provide critical performance and is competitively priced. Features include data port, 50 memories, TXCO, noise blanker, DDS, compact size and much, much more.



The IC-728 is a fully equipped compact transceiver. It comes with the basic features plus additional functions required for pleasurable HF operation such as passband tuning and a speech compressor. Perfect for mobile operation with a bright display and simple controls.

\$899⁹⁵



The IC-729 includes the exciting 50 MHz band1 in an HF all-band/all-mode transceiver. For DX hunting, there is passband tuning to effectively eliminate interface, and a speech compressor to increase talk power for long distance communications. In addition, the IC-729 has remarkable basic transmitting and receiving capability while remaining compact and lightweight.

\$1239⁹⁵



Here's 9 pounds of fun with a display that's easy to see, a front panel that's easy to work with, and performance to spare. You get big rig specs in an HF transceiver designed for mobile and portable use. Features include a noise blanker, pre-amp, 100 watts out, 32 memories and great sensitivity.

\$839⁹⁵



In a world filled with signals and sounds you need a communication system you can rely on. Now you can hear communications around the globe with a tiny package that fits snugly in your pocket- Icom's IC-R1, one of the smallest communications receivers ever produced. Other features include 100 memories from 100 KHz through 1300 MHz, AM, FM and FM wide modes and clock function.

* Note 800 MHz-900 MHz blocked

\$489⁹⁵



Seeing is believing, so enjoy the view. The built-in video display is your spectrum scope, frequency readout, terminal monitor and control screen. Dual receive, 150 watt output, 99 memories and wide dynamic range add up to a performance leader.

\$5839⁹⁵



Performance with easy-to-use features. With a full-featured front panel and a large fluorescent display, this radio was designed to be used! Wide dynamic range, full duty cycle heat sink, 99 memories, DDS and high speed antenna tuner will expand your fun.

\$2599⁹⁵




Continuous frequency coverage from 25 MHz through 2000 MHz with all mode capability (W.F.M. opt.). This unit offers a clock, timer, 900 memories, scanning and more than there's room to list.

• IC-7000A available

* Note 800MHz-900 MHz blocked

\$1389⁹⁵



Bring the world to your car. Now you can enjoy a wider world of broadcasting: VHF air and marine bands, AM, FM, WFM modes, emergency services and many more- in your vehicle. Fully covers all the stations worth hearing in the 500 KHz-1.8 GHz range.

* Note 800MHz-900 MHz blocked

\$679⁹⁵

Not Responsible For Typographical Errors.



Expires
September
1994

2

Prices Subject To Change Without Notice.

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD



\$545* for
2 Day
Delivery

*Up to 12 lbs. In Continental USA

1-800-426-2891

Fax (612) 786-6513

**Call for Catalog
Ask for Ext. 22**

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



ICOM
IC-Δ1A

SAVE \$50 MORE

The IC-Δ1A and IC-Δ1E are the first VHF/UHF tri-band handhelds in the amateur world. 144 MHz, 430(440) MHz and 1200 MHz band units are included in one compact body.

Other attractive features include 78 memory channels, built-in DTMF encoder/decoder, 4 DTMF memories, 4 LCD contrast levels with backlighting and off-timer. Programmable automatic power-off function. Built-in clock with timer functions and much more.

* CTCSS optional

\$829⁹⁵

ICOM
IC-W21AT

SAVE \$65 MORE

This new dual band handheld transceiver offers unsurpassed performance and the kind of innovative features amateurs have come to expect from Icom. From the unique new whisper function, auto-output power selection to many other trendsetting features, so impressive you'll want to experience it for yourself. This radio sports 70 memories, pager, CTCSS, and many other features.

\$499⁹⁵

ICOM
IC-2iA

SUMMER SIZZLER

\$199⁹⁵
with coupons & discounts

This ultra-slim transceiver is designed for maximum portability and convenience. Even with its NiCd battery pack attached, this transceiver can fit in your shirt pocket or hand bag.

CTCSS, clock and 100 memories are standard features.

Great for

- Packet • Travel
- Ultra lights • Spare
- Glove box • 1st Radio

\$829⁹⁵

ICOM
IC-W2A

SAVE \$30 MORE

A return to design fundamentals has produced something truly unique in dual-band FM transceivers. Even though it is the smallest in its class, it is packed to the limit with features to expand your fun out-of-doors, on the road, or at home.

\$479⁹⁵

ICOM
IC-2GXAT

7 watts on 12V

High power & compact design set a new performance pace. This HT offers 40 memories, Die cast case, CTCSS. Its new and exciting from Icom.

- IC 2GX with out key pad

SAVE \$20 MORE

\$279⁹⁵

ICOM
IC-2340H

NEW LOW PRICE!

This new 2 meter/440cm Dual band is another star in a new product line up for Icom. Features include separate tuning, volume and squelch controls for each band, 100 memories, high power out-put make this competitively priced unit a real winner.

\$599⁹⁵

ICOM
IC-T21A

FREE SMA/BNC Adapter!

Dual receivers with single band transmit makes this HT truly versatile. The 6 watt output, lit keypad, fast scan, DSI, clock, 114 memories and a compact design add up to a great new product.

- IC-Δ1A \$389.95

\$325⁹⁵

ICOM
IC-V21AT

2 & 220

SAVE \$50 MORE

ICOM gives you a choice with this great dual band radio, 90 memories, dual watch, encode/decode, digital squelch, scan, DTMF pad & more. Join the fun now.

\$569⁹⁵

ICOM
IC-Δ100H

SAVE \$100 MORE

Here's a triple band mobile ready to go out of the box. This rig is packed with features such as 642 memories, 3 external speaker jacks, detachable front panel and a multi-function mike. This rig is sure to please your operating needs. Experience the magic of Icom.

\$1399⁹⁵

ICOM
IC-2700H

This new 2 meter/70cm dual band mobile will wow you with all its new features. It sports a removable front panel, separate controls for tuning-volume and squelch, Remote control mike. See it at Dayton along with the IC-3700H for your 70cm/ 1.2 GHz needs.

\$769⁹⁵

ICOM
IC-281H

9600 Packet Tested

This 50 watt 2 meter mobile is equipped with a data port, crossband repeat opt., 440 MHz receive, 60 memories, auto dialer, auto off and cross band duplex operation. There's more to discover with Icom.

- IC-Δ1H UHF version available

\$379⁹⁵

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD

Not Responsible For Typographical Errors.

3

Expires
September
1994



Prices Subject To Change Without Notice.



\$545* for
2 Day
Delivery
*Up to 12 lbs. in Continental USA

1-800-426-2891

Fax (612) 786-6513

**Call for Catalog
Ask for Ext. 22**

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



HURRY!
Coupons Expire
July 20, 1994

KENWOOD TS-950SDX

**SAVE
\$100
MORE**



Swift performance and surgical precision are second nature to the TS-950SDX. Quality engineering blends aesthetic simplicity of form with a wide range of advanced features: dual frequency receive, 100 memories, DSP, MOS FET final section (a first for amateur transceivers) and much more. **Supplies Limited.**

\$3847⁹⁵

KENWOOD TS-790A



The TS-790A breaks new ground in terms of features and performance. With the optional 1200 MHz unit, it offers tri-band coverage for maximum versatility. Supporting its dual-frequency receive capability are separate readouts and controls for main and sub bands, even full-duplex cross-band operation is possible.

\$1799⁹⁵

**SUMMER
SIZZLER**

KENWOOD TS-50S

Enjoy high
performance
communica-

**SAVE
\$50
MORE**



tions plus go-anywhere convenience with the world's smallest 100w mobile HF transceiver. It opens up a whole new world for the amateur radio operator. It can be mounted in a vehicle, taken on a DX-pedition, or even permanently installed as a base station transceiver. **Supplies Limited**

\$949⁹⁵

KENWOOD TS-850

**SAVE
\$50
MORE**



A rewarding experience. Kenwood's renowned digital technology endows the TS-850S/AT HF transceiver with specs that put it firmly in the top ranks of amateur radio equipment. Features include a preprogrammed automatic antenna tuner (built-in or optional), Kenwood's Advanced Intercept Point system for enhanced dynamic range, 100 memories with three scan modes, a Direct Digital Synthesizer (DDS) and digital PLL system, plus an optional digital signal processor. **Limited to supply on hand.**

\$1695⁹⁵

KENWOOD TS-60



Here's the twin to the TS-50. Enjoy high performance communications plus go-anywhere convenience with the world's smallest 90w mobile HF transceiver. Engineered for 90 watts of fun on 6 meters. Features include 100 memories, compact size, DDS, L.C.D. panel and more.

\$997⁹⁵

KENWOOD TS-690S



A radio that can star in virtually any role with its 100w transmission capabilities on nine amateur bands plus 50 watts output on 6 meters. Compact, lightweight construction makes this HF transceiver particularly suited for DX-ing. Rugged reliability is matched with leading edge electronics, Kenwood's AIP system for improved dynamic range, DDS for fine tuning and the optional DSR-100 digital signal processor.

\$1429⁹⁵

KENWOOD IF-232C



Kenwood provides a variety of devices to add computer control or allow some units to be worked remotely. IF-232C converts personal computer RS232 levels, to levels used with Transceivers such as; TS-950 series, TS-850 series, TS-690 series, TS-790A series, TS-450 series and the R-5000.

\$114⁹⁵

KENWOOD TS-450

**SAVE
\$50
MORE**



A radio that can star in virtually any role with its 100w transmission capabilities on all nine amateur bands. Compact, lightweight construction makes this HF transceiver particularly suited for DX-ing. Rugged reliability is matched with leading-edge electronics-automatic antenna tuner, Kenwood's AIP system for improved dynamic range, DDS for fine tuning and the optional DSR-100 digital signal processor. **Limited to supply.**

\$1269⁹⁵

KENWOOD TS-140S



The perfect entry-level HF transceiver. All-mode performance is enhanced by numerous by numerous user-oriented features such as 31 memories, a dual-mode noise blanker with level control, CW full & semi break-in, built-in speech processor and it's light enough for DX-peditions and mobile use.

\$899⁹⁵

KENWOOD TL-922A

**Rugged
3-500Z's**



The TL-922A is an HF Linear amplifier designed to provide maximum legal power. By utilizing two 3-500Z high performance transmitting tubes, you'll have plenty of reserve power for those DX and contest contacts. Features include 2kw PEP output, 2 meters, variable ALC, delay cooling, class AB, bias and a look to match those Kenwood products.

\$1799⁹⁵

KENWOOD HAM WINDOWS



Graphic control of your amateur radio station with Ham Windows. The LogWindow monitors the DX cluster, shows your current log and provides current DXCC and WAZ award status. The system also interfaces to HamBase. Spot, work and log new countries with the latest point-and-shoot technology.

\$149⁹⁵

Not Responsible For Typographical Errors.

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than haste in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD



Expires
September
1994

4

Prices Subject To Change Without Notice.



\$545* for
2 Day
Delivery

*Up to 12 lbs. in Continental USA

1-800-426-2891

Fax (612) 786-6513

Call for Catalog
Ask for Ext. 22

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



KENWOOD TH-78A

SAVE \$30 MORE

Compact and confident, it sets exciting new standards for portable communications, combining simplicity of operation with a multiplicity of features. In addition to built-in DTSS and paging functions, it provides a dual-frequency transceive capability, wide band receive, a sliding keypad cover, and many other features. While supplies last.

\$429⁹⁵

KENWOOD TH-733A

SAVE \$20 MORE

NEW

Exciting new features make this dual band mobile a class leader. The 6 new program mode memories, AIP 72 memories, CTCSS & DTSS encode set the performance pace while the wireless, removable front panel makes installation any place a breeze. More features await your inquiry.

\$649⁹⁵

KENWOOD TM-241A

PRICE BREAK THROUGH!

SUMMER SIZZLER

This 2 meter FM mobile provides the user-friendly operation the amateur radio operator expects from Kenwood. It comes complete with extra-large display, DTMF microphone, wide band receive and illuminated switches. For the experienced operator, an additional feature is available which allows you to connect to as many as 4 mobile transceivers by remote control. **Hurry coupon expires 7/20/94.**

\$327⁶²
\$297⁶²
with all coupons & discounts

KENWOOD TH-28A

This state of the art HT has numerous features- the ability to store both alphanumeric and frequency data in non-volatile memory, AM aircraft, alphanumeric message paging- in addition to DTSS and pager functions- plus switchable dual-band receive. As an added bonus the number of memory channels can be increased to 240 (option).

\$299⁹⁵

KENWOOD TM-251A

This new 2 meter transceiver provides dual band receive and gives you a data port that's 9600 baud ready. CTCSS encode, 41 memories are expandable, cross band repeat, time out timer, DTSS and much more.

- TM-451A 70cm Tx, 2m Rx
- TM-551A 1.2GHz Tx 70cm Rx

*FCC Approval pending

\$439⁹⁵

KENWOOD TM-742A

SAVE \$40 MORE

New VHF/UHF tri-bander with third band optional. This new transceiver has all the features and advantages of the TM-741 plus these enhancements- direct frequency entry, the unit can separate into three pieces (requires remote cable kit), CTCSS encode is built in, and it can be controlled remotely with DTMF signals from any transceiver. Also available in a tri-band model (the TM-942A).

\$439⁹⁵

KENWOOD TH-22AT

SAVE \$20 MORE

Small just got smaller. Kenwood's new TH-22AT (144MHz) and TH-42AT (440MHz) are in a category all their own, redefining "handheld communications" with a stylish palm size format and equally impressive performance. Besides being compact enough to slip into a shirt pocket, these two FM transceivers feature long battery life, DTMF keypad, user-friendly menu system, multiple scan functions, 41 memory channels, CTCSS encode, DTSS, and much, much more. **Limited supplies.**

\$249⁹⁵

KENWOOD FILTERS

TU-7	\$49.95
VS-1	\$67.95
YG-455CN-1	\$169.95
YK-88C-1	\$99.95
YK-88CN-1 (1st F)	\$94.95
YK-88S-1 (1st F)	\$94.95
YK-88SN-1	\$94.95
YK-455C-1 (2nd F)	\$109.95
YG-455C-1 (2nd IF)	\$144.95
YG-455CN-1 (2nd IF)	\$159.95
YK-455C-1	\$109.95
YK-88S-1	\$99.95

KENWOOD ACCESSORIES

BC-15A	\$114.95
BH-6	\$39.95
BT-8	\$26.95
HM-2	\$16.95
HMC-2	\$66.95
KLF-3	\$23.50
ME-1	\$36.95
PB-13	\$63.95
PB-14	\$99.95
PB-17	\$99.95
PB-18	\$86.95

KENWOOD ACCESSORIES

We're a Kenwood Warranty Center

SP-31	\$99.95
SP-23	\$84.95
SP-950	\$124.95
DTU	\$29.95
UT-10	\$545.95
UT-50S	\$329.95
UT-28S	\$309.95
UT-220S	\$329.95
UT-1200	\$389.95

KENWOOD ACCESSORIES

PG-2W	\$15.95
KLF-3	\$23.50
SC-33	\$20.95
SC-34	\$21.95
SC-35	\$19.95
SC-36	\$21.95
SMC-31	\$59.95
SMC-32	\$46.95
SMC-33	\$59.95
SMC-34	\$62.95

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road 1, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Not Responsible For Typographical Errors.

5

Expires
September
1994



Prices Subject To Change Without Notice.

CIRCLE 153 ON READER SERVICE CARD



\$545* for
2 Day
Delivery

*Up to 12 lbs. In Continental USA

1-800-426-2891

Fax (612) 786-6513

Call for Catalog
Ask for Ext. 22

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm
CST



YAESU FT-1000D

SAVE \$100 MORE

Fun's fun, but you can be very serious with this heavy duty competitor. Dual receivers, 200 watt output, 99 memories and 108 dB dynamic range gives you the performance edge. This radio will help you collect more points in a contest and add more cards to your DX collection. The specs tell the story, but it's the ride that's exciting.

• FT-1000 \$3099.95

\$3855⁹⁵

YAESU

HURRY!
Coupons Expire
July 20, 1994

**Factory
Warranty
Center**

YAESU FT-890/AT

SUMMER SIZZLER

A fine blend of high performance features borrowed from the FT-1000 and the FT-990 are combined in this affordable transceiver. Pass band tuning, variable notch filter, variable noise blanker and VOX dress out of this 100W rig. This model includes a built-in antenna tuner to expand your mobile fun. Great for base operation also.

• FT-890 \$1149.95

\$1299⁹⁵
\$1199⁹⁵
with all coupons & discounts

YAESU FT-990

SAVE \$100 MORE

Based on the acclaimed performance and easy operation of the FT-1000, the new FT-990 combines the basic technical features of that top-of-the-line model with several new advances in both transmitter and receiver circuitry, resulting in a spectacular performer at a reasonable price. Digital filter, 90 memories, wide dynamic range and much more!

• FT-990/DC \$1739.95

\$1995⁹⁵

YAESU FT-690RII

Portable or mobile, this 6 meter all-mode transceiver delivers fun and function. The 10 watt linear amplifier clips on in place of an optional battery case to extend your operating horizon.

FBA-8 Battery Case \$42.00
CSC-19 Soft Case \$21.00
FTS-7A Encoder/Decoder \$41.00
MMB-31 Mobile Bracket \$22.00

\$657⁵⁰

YAESU FT-290RII

Portable or mobile, this 2 meter all-mode transceiver delivers fun and function. The 25 watt linear amplifier clips on in place of an optional battery case to extend your operating horizon.

FT-790RII 70 cm transceiver \$649.95

\$558⁸²

YAESU FT-840

SAVE \$50 MORE

This new transceiver delivers the fun and performance you're looking for while staying on a budget! It has 100 watt output, 100 memories, DDS, IF Shift FET front end and a general coverage receiver, all for a low price.

FC-10 Matching antenna tuner, external \$349.95
FC-800 Remote antenna tuner \$469.95

\$799⁹⁵

YAESU FL-7000

SOLID STATE

Solid state design with a built in antenna tuner makes for a no fuss QSO in tough conditions is a full 1200 watts input on all bands with automatic or manual tuning lets you decide the best way to drive this competitor.

\$1999⁹⁵

YAESU FRG-100B

This new high performance table top receiver provides general coverage from 50 KHz - 30 MHz in all and FM at an affordable price. Features include 50 memories, noise blanker, 10 MHz, 100 and 1 KHz tuning steps, selectable attenuator, twin clocks and scan mode.

\$599⁹⁵

YAESU MOBILE ACCESSORIES

• AD-3	\$49.95
• DVS-1	\$105.95
• DVS-3	\$139.95
• FRC-4	\$42.00
• FTS-22	\$58.00
• YKS-1L	\$59.00
• MMB-37	\$16.00
• MMB-48	\$18.00
• SP-3	\$21.00
• SP-4	\$30.00
• SP-7	\$37.00

Not Responsible For Typographical Errors.



Expires
September
1994

6

Prices Subject To Change Without Notice.

Authorized Factory Warranty Center
We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2653 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD



HURRY!
Coupons Expire
July 20, 1994

\$545* for
2 Day
Delivery

*Up to 12 lbs. In Continental USA

1-800-426-2891

Fax (612) 786-6513

**Call for Catalog
Ask for Ext. 22**

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm


CST

Master Card

VISA

DISCOVER

FT-736R



Satellite and all-mode 2m/70cm work gets exciting with this full-featured transceiver. Linked tuning, 12 unlinked memories, 100 general purpose memories, and room for 2 optional modules offering band extensions for 6m, 220MHz, or 1.2 GHz operation.

\$1695⁹⁵

FT-416B

**SAVE
\$25
MORE**



This new VHF handheld transceiver provides the latest features- auto tone search, automatic battery saver, automatic power off, 41 memories, CTCSS encode/decode, DTMF paging, backlit keypad and display and a choice of two colors (black or gray).
FT-816 UHF version available.

\$264⁹⁵

SUMMER SIZZLER

**FREE
BATTERY
FNB 25G
Limited
Supply**

**YAESU
FT-530**



The newest member of the dual band family. This handheld sports auto tone search, 82 memory channels, automatic power off, built-in VOX, dual in-band receive feature, built-in cross band repeat function and much more.

\$449⁹⁵


-25⁰⁰

\$424⁹⁵

with all coupons & discounts

FT-5200

**SAVE
\$25
MORE**



The removable front panel lets this dual bander fit any installation. It features 50w out on 2 meters, 35w out on 70 centimeters, 32 memories, CTCSS encode and PAGE mode.

\$619⁹⁵

FT-5100

**SAVE
\$25
MORE**



This dual band mobile features 100 memories, cross band repeat, lighted keypad, built-in duplexer and a small footprint. Dual watch capability rounds out this 50/35 watt VHF/UHF transceiver. Packet ready.

\$599⁹⁵

FT-2500

NEW



This new mobile borrows its ruggedness from the FT-2400H while adding great new features such as advance track tuner, time out timer, A.P.O., 9600 bps option, 31 memories, the new "omni-glow" LCD and more!

\$349⁹⁵

FT-11R

**SAVE
\$25
MORE**



This new HT packs the features you want in a small size. It features a new alphanumeric display, super small profile, new square "D" battery design, lit keypad, AM air craft receive, DSO & CTCSS encode.

• **FT-11RH** Hi power version
\$309.95

\$294⁹⁵

ROTORS

**G-1000SDX
\$499.95**



Whether you are installing a station for professional HF communications, a satellite ground station or merely a rotator-controller combination for you. Designed to last a lifetime, all Yaesu rotors are housed in weatherproof melamine coated die-cast aluminum and permanently lubricated to insure maintenance-free operation under all climate conditions.

**SAVE \$25
MORE ON:**
• **G-2700SDX**
• **G-1000SDX**
• **G-800SDX**
• **G-800**
• **G-500A**

**G-500A
\$289.95**



**G-5400B
\$499.95**

**SAVE
\$25
MORE**

FT-411E



This full featured handheld provides hours of fun on a small budget without compromising on quality. Check out the wide band receive, 40 memories and dual VFO!

\$295⁹⁵

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD

Not Responsible For Typographical Errors.

7

Expires
September
1994



Prices Subject To Change Without Notice.



\$545*
for
2 Day
Delivery

*Up to 12 lbs. In Continental USA

1-800-426-2891

Fax (612) 786-6513

Call for Catalog
Ask for Ext. 22

Phone Hours

1-800-426-2891

M-F 8 am - 8 pm

Sat. 10 am - 5 pm

CST



ALINCO DR-1200T



The Alinco DR-1200T, 2m data radio is engineered to optimize packet radio performance and operating convenience into a compact package. 25w RF output, 1220/2400bps utility, 14 memory channels, 4 scanning modes, and other excellent features are provided at an economical price. The DR-1200T is the smartest way to connect you and packet radio.

The DR-1200TH provides 25w RF output with hi/low power selection switch and output switching designed to work at 9600 bps. **\$269.95**

ALINCO DR-130T



Alinco is very pleased to introduce the newest addition to our quality line of amateur radio transceivers, the DR-130T, 2 meter mobile. Engineered with the most advanced technology, it is designed with the beginner and the most experienced ham radio enthusiast in mind! It is powerful, boasting 50 watts in high power transmit to reach those distant repeaters. It is compact and ideal for even the tightest mobile installation applications. **\$319.95**

ALINCO DR-600T


SUMMER SIZZLER

\$578.55

SAVE \$20 MORE

Experience all of today's exciting VHF/UHF FM action with Alinco's DR-600T and enjoy dual band operation at it's absolute best. This powerful and easy to use 2 meter/70cm FM transceiver is jam packed with special features like simultaneous dualband receive, removable front panel, full duplex operation, scanning, DTMF code paging and remote controlled cross band repeating. Your most wanted options are factory installed, thus making it an outstanding value.

ALINCO DJ-G1T




SAVE \$30 MORE

HURRY!
Coupons Expire
July 20, 1994

with Channel Scope

\$329.95

ALINCO DR-570T



The DR-570T VHF/UHF FM Mobile Transceiver has been specially designed to combine two radios into one compact package with maximum operating performance. You get 45 watts on 2 meters and 35 watts on 70cm, 20 memory channels, wide frequency coverage, large multicolor dual digital LCD display, plus much more! **\$525.95**

ALINCO DJ-180T



SAVE \$10 MORE

The DJ-180 has great audio and tough as nails construction, simple, and intuitive operation designed with command keys that are laid out so you won't have to spend hours studying the manual.

• DJ-180TH \$239.95

\$219.95

ALINCO DJ-580T



SAVE \$20 MORE

A super-compact handheld, the tiny DJ-580T is a powerful, feature packed twin bander. This super-compact HT is the smallest you'll find, and literally fits in the palm of your hand. Ergonomic design combined with excellent sensitivity and unbelievable great sound, sets a new standard for miniature HT's. **\$399.95**

TELEX



Satellite
Station
in Store

The OSCAR Link antenna system is today's most flexible system for satellites. Both 145.9 and the 435 MHz antenna's have polarity switching. The entire system balances on a 5' fiberglass boom. The latest NBS design 435 MHz and logarithmic 2 meter spacing make this the best OSCAR antenna available today. **\$385.95**

ASTRON



RS-12A	12 amp power supply	\$79.95
RS-20A	20 amp, power supply	\$96.95
RS-35A	35 amp, power supply	\$149.95
RS-50A	50 amp, power supply	\$219.95
RS-20m	20 amp w/volt/amp meter	\$116.95
RS-35m	35 amp w/volt/amp meter	\$169.95
SL-11A	11 amp, slim style	\$79.95

DAIWA

NS-660A

Cross needle, 1.8-150 MHz SWR meter with remote capability. **\$185.95**

CN-101

Cross needle SWR and power meter 1.8-150 MHz. **\$89.95**

DX-100

Duplexer SO-239 in and two PL259 out connector only. **\$28.95**

DX-10M

As above with 6" leads on PL259 connector. **\$37.95**

DX-10N

As above with 1 "N" connector and 1 PL259 connector. **\$37.95**

AEA PK-900



This next generation of multi-mode controller is made in the USA with a front panel designed for you! Enjoy dual port action for packet, RTTY, FACTOR, CW, fax, and more! **\$475.95**

Not Responsible For Typographical Errors.



Expires
September
1994

8

Prices Subject To Change Without Notice.

Authorized Factory Warranty Center

We offer factory authorized warranty service for Icom, Kenwood and Yaesu. We service all makes and models. Our customers may send any product requiring service to us, and we will handle it for them. This is a one-stop service that keeps our customers having more fun than hassle in this hobby. If you need a custom cable for packet and don't have time to make it, let us do it for you. C.A.P. & M.A.R.S. mods are also available at reasonable rates to authorized hams only.

2663 County Road I, Mounds View, MN 55112

Metro: (612) 786-4475 • Nat'l Watts: 1-800-426-2891 • FAX (612) 786-6513

Store Hours: M-F, 10:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

Phone Hours: M-F, 8:00 am - 8:00 pm, Sat., 10:00 am - 5:00 pm

CIRCLE 153 ON READER SERVICE CARD

The Coleman (Mini)-Kilowatt

Extend your station's working range for next to nothing.

by Steve Katz WB2WIK/6

Whenever you use a lengthy transmission line to connect a radio to an antenna, you can expect to encounter considerable loss. Even the very best commonly-available cable for UHF/SHF pioneers (7/8" diameter hardline) is costly, heavy, requires expensive connectors, and still has measurable losses. Most of us, even those with multiple feedlines and limited budgets, aren't using cable that good. We're using RG8/U, RG213/U, 9913, 9086, 9096, or some similar 0.405"-diameter 50 ohm transmission line which is nearly lossless at lower frequencies, but measures more loss than most of us would like to have at VHF or UHF.

If you're using 50 feet of feedline, it's probably no big deal unless you're operating at 1.2 GHz or higher frequencies. But if your setup is anything like mine, you're using hundreds of feet of coax to feed each antenna because you have a tall tower or antennas far away from the shack. Thus, you are undoubtedly encountering considerable feedline loss, which limits your station's capabilities.

Most satellite enthusiasts and moon-bouncers use masthead preamplifiers to boost received signal levels at the antenna feed point, thus overcoming transmission line losses on receive. But even these folks rarely locate their transmitters at the antenna, which in many cases could boost transmitted ERP (effective radiated power) by 3 dB or more, because the transmitting equipment is more bulky and normally not weatherproof. Who wants two inches of water inside their \$500 transmitter?

My Solution

Luckily, there is a solution to this problem, and it's easier than you might think. I have a VHF simplex autopatch installed at my home. It uses a conventional 2 meter FM rig and a simplex patch interface between the rig and the telephone line, and allows me to make non-business, no-cost telephone calls from my car as long as I'm within range of my home station. (In my case, this can be a large radius, since my home station antenna is quite high.) The problem is, the patch gear is set up in the shack, while its antenna is atop a 40-foot tower, up on a hill behind my house. This means using a transmission line more than 250 feet long. I could

have put the whole "patch" station up on the hill, closer to the antenna, but this would mean losing local control of the rig. There are new, very costly radios that allow full remote-control of all functions, but I don't own one of these and didn't want to shell out more than \$1,000 for a radio that doesn't work any better in most respects than my old \$250 rig. Plus, I don't know how well the radio would work if installed in a severe environment (like outdoors). It doesn't get very cold here, but it does get mighty hot. If I installed a rig inside a weatherproof box it might reach 150 degrees F or higher on a sunny day, even if the box were well-ventilated.

My situation isn't unusual. Many of us hams use antennas located a distance from our homes, and some of us have really tall towers. In either case, a long and lossy feedline is required. Here's my solution:

I purchased a Coleman 28-quart cooler with a tight-sealing lid for \$20 at a local discount store. It was just large enough internally to house a solid-state power amplifier/RX preamplifier combination and a 12V power supply. Thermos, Igloo and others make similar coolers. Shop around for your own deal. Even huge coolers with 40-quart

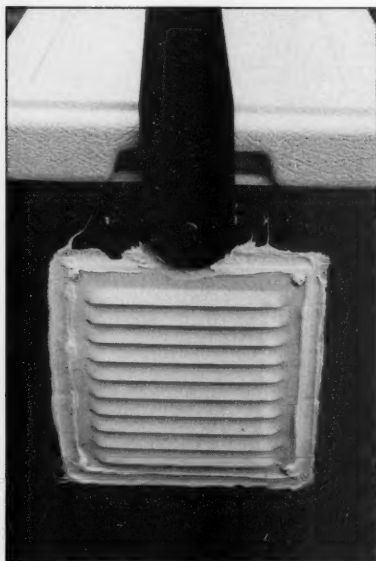


Photo A. Close-up of one of the Coleman's side vent covers. Note the thorough caulking job.



Photo B. The Coleman (Mini)-Kilowatt under construction. The cooling fan can be seen at one end-side vent hole, and a 4" hole is directly opposite.

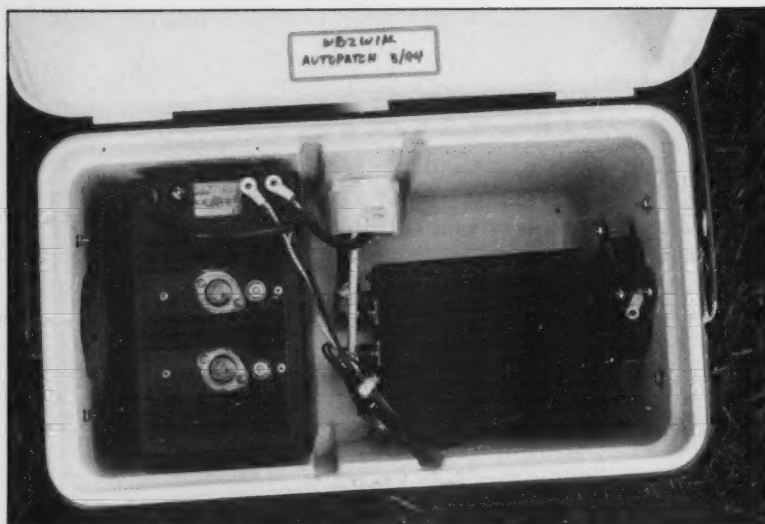


Photo C. Inside the cooler, with the 12 volt power supply and the 80 watt amp/preamp installed. Everything fit with room to spare. A larger cooler could likely accommodate a real kilowatt amplifier.

or larger capacity cost less than \$40. They are all thermally insulated, reasonably weathertight, and rugged enough to be installed outdoors permanently.

Because these coolers are normally sealed tight when their lids are closed, heat generated by the equipment they contain will build up to destructive levels unless some provision is made for cooling. I purchased a couple of small vent covers which had louvers and metal screening already preattached. After cutting suitable vent holes in both sides of my cooler, I installed the vent covers over these holes with the louvers on the outside and facing downward, to prevent rain from entering the vents (see Photo A). These vent covers cost 99 cents each at a local discount home supplies store. After cutting a 4" diameter hole in each side of the cooler using a portable jigsaw (the cooler materials cut very easily—they're just PVC and styrofoam), I mounted the vent covers using four 2-1/2" #8 stainless-steel bolts each, with lockwashers and nuts inside the box. Then I used weatherproof window caulking compound (GE, Dow, DAP or whatever, from a tube) to caulk all around the small cracks between the vent covers and the cooler itself.

I mounted a small cooling fan inside the cooler, over one of the vent holes, to exhaust air out that vent (see Photo B). When the cooler cover is closed, the fan draws outside air in the opposite vent and blows air out the vent over which the fan is located. This means the temperature inside the cooler will always be about the same as the air temperature outside. (Those of you living in extremely cold climates might wish to block the vents off during the winter season and then open them during the summer. Another option would be to add some type of heating unit to the project.)

See Photos C, D and E. To allow access to

and from the equipment contained by the cooler, I used 2-1/2" diameter PVC water fittings. A short, straight section of threaded PVC pipe passes through the rear wall of the cooler and joins to a 90-degree PVC elbow attached to it on the outside of the cooler. Since I used pre-threaded PVC, this just screwed together. If you can't find threaded PVC accessories, use unthreaded pieces and glue them together with the specialized cement sold just for this application. The outside elbow faces downward to prevent rain from entering, and is large enough internally to pass three or four cables. The hole for the PVC inlet/outlet pipe was also quickly cut with my jigsaw, and the straight PVC sec-

tion is held in place with an internal threaded PVC nut. The exit point is weather-sealed with window caulking, just like the vents. If you use similar procedures, be sure to allow at least 12 hours for the caulking to fully cure before proceeding with other work.

Installing the Electronic Guts

Once the vent covers, fan and PVC pipe are in place and the caulking is cured, it is time to install the electronics. I used a Mirage B108G 2 meter power amplifier/RX preamplifier combination. This "brick" runs 80 watts output power when driven by 10 watts, and contains an RF-switched GaAs-FET receive preamplifier with about a 1 dB noise figure. It requires about 12 amperes at 13.8 volts DC for power when transmitting, and I used a Kenwood power supply I happened to have on hand. An Astron RS-20 or similar commercial unit would have done as well and also fit in the box. The DC power supply requires only about 3 amperes at 117 VAC for line power, so it can be supplied by a very long #12 or #14 gauge line cord.

There's no sense in putting the amplifier in the field and running DC power up to it, since the DC load current is so high. My modest little 80 watt (output) amplifier "brick" requires 12 amperes, and a larger solid-state amp will require much more. (The popular 160-170 watt bricks all consume about 25 amperes at 13.8 VDC.) If I had run DC from the shack all the way up to the box, I would have needed #10 copper conductors as a minimum, preferably #8 or #6. This is very heavy and costly wire that isn't even commonly available in paired conductors with a weatherproof covering. By putting the DC power supply in the box with the amplifier, I could use inexpensive #12 or #14 outdoor AC extension cord, like that sold for outdoor garden tools (electric lawn mowers or hedge clippers). Two 100-

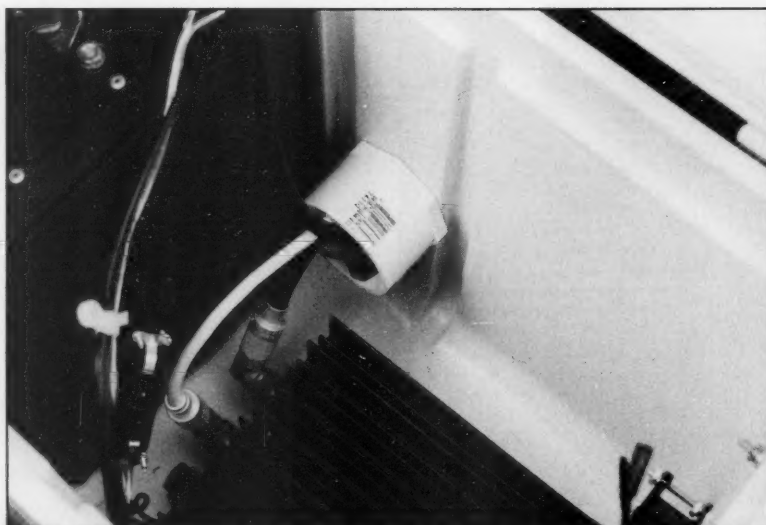


Photo D. Close-up view of the cables exiting the PVC pipe feed-through. The gaps in the pipe are filled with foam-rubber gasketing material, my "Black Widow Protection."

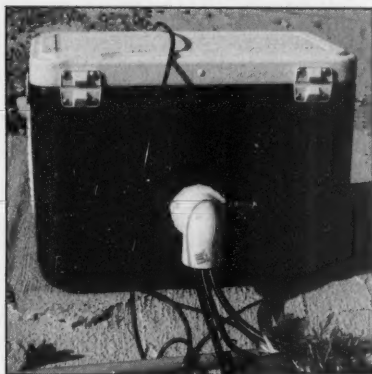


Photo E. The completed Coleman (Mini)-Kilowatt as it sits on the ground alongside the base of the antenna tower to which it's connected.

foot extensions cost only \$26 total and these are very weatherproof, with a tough rubber jacket that even resists garden "critters" with sharp teeth! (Note: For a permanent installation that meets existing electrical codes, you'd need to use wiring inside a metal conduit. But I consider my installation "temporary," like using an electrically-powered garden tool, and therefore use outdoor extension cords instead. In a semi-rural area, anyone can get away with this.)

As you can see in the photos, everything fit in the box quite nicely. Before installing the cooler at the antenna site, I checked it for water leaks (with the cover closed, of course!) by spraying it with a garden hose from various angles. I found the cover did leak a bit, and there was no place for water to exit the box, so I drilled half a dozen 1/4" holes in the bottom of the box, at the lowest points inside the container, to allow any water that leaks in to exit quickly. A second "garden hose" test revealed that this solution was a good one. Another solution might be to use duct tape to seal the lid of the cooler once it's closed, and not drill any "weep" holes.

This whole project took maybe an hour to

complete, not including the 12-hour cure cycle for the caulking, and cost \$35 (not including the electronic equipment). After installing the cooler "up the hill" near the base of the autopatch antenna tower, and having the AC line cord plus the coaxial input and output lines routed through the PVC elbow and connected, I pushed some foam-rubber weatherstripping material into the remaining voids in the PVC pipe. This was done in hopes of keeping insects out of the box. Tiny insects like fleas or gnats might still enter through the holes in the window-screening material at the vents, but I was more concerned with black widow spiders, common in these parts. Black widows are too large to pass through the window screens, but might've entered the PVC pipe. I don't want any "surprises" the next time I open the lid of the cooler!

To keep the cooler from moving much during an earthquake, or from disappearing altogether in the event "visitors" with vandalous intentions happen to spot it in my yard, I attached the box to a nearby irrigation pipe (3/4" galvanized—pretty strong stuff) with a steel bicycle anti-theft cable, as shown in Photo E, using a padlock. If you install your Coleman (Mini)-Kilowatt in an unprotected yard or alongside your tower, you might consider taking some similar precaution.

The Results

Was this small project worth the effort? You bet it was! My original autopatch system, with a rig running 40 watts in the shack, had an effective radiated power of 60 watts, factoring in feedline loss and antenna gain. By adding the remote amplifier, its ERP is now 260 watts, a 6.4 dB improvement. Had I located the same amplifier in the shack, instead of near the antenna, the resultant ERP would have been 115 watts, or 3.5 dB less effective power. Now I have only about 0.8 dB feedline loss between the amplifier and the antenna, whereas with a shack-mounted amplifier the loss would be 4.3 dB.

And how about on receive? With the shack-installed rig, my receiver sensitivity

was 0.48 μ V for 20 dB noise quieting (this is 0.28 μ V, degraded by 4.3 dB of transmission line loss). Now, with the remotely-located preamp in the B108G, my receiver sensitivity is 0.32 μ V for 20 dB quieting. This is a receiver sensitivity improvement of 3.5 dB. The system can now "hear" much weaker signals than it could before. Had I installed the receiver preamp in the "shack," the resulting improvement would have been essentially zero, since the preamp noise figure and the original rig's noise figure are about equal. (No amount of preamp gain makes any difference unless the noise figure is improved.)

In all, I've improved my system performance by 7 dB: 3.5 dB on transmit, and 3.5 dB on receive. The difference in working radius for the autopatch system described is several miles. I can now access and hear the "patch" from many places farther away than previously. All this improvement cost was \$35 for the cooler, modified as described, and \$26 for extension cords to power the equipment. A mere \$61 total investment. I could have raised the antenna another 50 feet to yield a similar improvement, but at 10 times the cost.

Whether you have an autopatch system, or just want to extend your working range for normal simplex modes (FM, SSB, packet, etc.), remoting your final power amplifier and receiver preamplifier will help. One precaution I should mention is to be sure the AC extension cord is plugged into a "GFI" outlet, or protected by a GFI circuit-breaker. GFI stands for "ground-fault interrupter," and this is not only prudent for any AC power line used outdoors, but is an electrical code requirement nearly everywhere. A GFI might occasionally "trip" on rainy days, rendering your remotely-located equipment powerless until it's reset, but the protection afforded against accidental electric shock is well worth the possible nuisance.

I don't know about you, but I like almost-free station improvements. I picked up 7 dB for \$61. This is \$8.71 per dB, an excellent return on investment. And after all, this is only a hobby.

MORSE CODE MUSIC!

SENSATIONAL NEW WAY TO LEARN CODE—Do Aerobics, Sing, Jog, or Drive while learning code! A fun & easy way to learn or retain Morse Code skills. Now the secret is yours with this amazing synchronized breakthrough! Great for Novice, Technician or the classroom. Order:

"THE RHYTHM OF THE CODE"
Version 2 cassette today!

Send \$9.95 and we'll pay the shipping to:

KAWA RECORDS

P.O. Box 319-ST

Weymouth, MA 02188

Check or money order only. We ship all orders within 5 days.

Overseas please add \$2.00 for air mail.

MA residents add 5% sales tax.

CIRCLE 2 ON READER SERVICE CARD

ONV SAFETY BELT CO.

P.O. Box 404 • Ramsey, NJ 07446

800-345-5634

Phone & FAX 201-327-2462

ONV Safety Belt With Seat Harness



\$89.95

OSHA

We Ship

Worldwide

Order Desk Open

7 Days/Week

ONV Tool Pouch \$15.95

Add \$4.00 For Handling VISA M/C CHECK

ONV Belt W/O Seat Harness

\$74.95

CIRCLE 102 ON READER SERVICE CARD

From
Micro
Computer
Concepts

RC-1000 REPEATER CONTROLLER

- Autopatch • Reverse Autopatch
- User Programmable CW ID, Control & User Codes & Timeouts

Manual with schematics • 90-Day Warranty
Wired & Tested w/ manual **\$239.95**



Micro Computer Concepts

8849 Gum Tree Ave.

New Port Richey, FL 34653

813-376-6575

CIRCLE 160 ON READER SERVICE CARD

Check out our
NEW

\$40 Special To Charge You Up...

Periphex Power Packs for Longer QSO Time



Buy your radio from the manufacturer. Buy the battery pack from Periphex—where batteries are our only business!

replacements for	regular price
FNB-26 YAESU 1000ma	\$ 60.00
BP-84S ICOM 1400ma	\$ 63.00
PB-7S KENWOOD 1400ma	\$ 59.00
EBP-24S ALINCO 1500ma	\$ 62.00

Now Only \$40 Each

- One Year Warranty
- Matched cell construction
- Case re-build service
- Long life, extended operating time
- Made for HAMS, by HAMS

Add \$4.00 Shipping & Handling for first battery.
\$1.00 for each add'l battery - U.S. only
Connecticut residents add 6% tax.

Available
from your
dealer...

PERIPHEX inc.

the only thing low about our charge is the cost...

1-800-634-8132

115-1B Hurley Road • Oxford, CT 06478 • (203) 264-3985 • FAX (203) 262-6943

CIRCLE 68 ON READER SERVICE CARD

Silent Solar Power



The \$349.00 Bullet-Tested QRV Solar Power Supply keeps your repeater on the air 'round the clock or powers your 100w HF station 60 hrs a month. Control circuit speeds charge, protects gel cells & sealed batteries. Fully assembled, QRV, portable. Easily expanded.

Add \$10 S&H Info \$1
AntennasWest
(801)373-8425 Box 50062 Provo UT 84605

CIRCLE 336 ON READER SERVICE CARD

ATTENTION

If you're looking for an antenna to cover all of:

**10m, 12m, 15m, 17m, 20m
30m, 40m, & 100 KHz of 80M**

THEN CONTACT:

GAP


ANTENNA PRODUCTS, INC.

Tel# (407)778-3728

Ask them about their new Titan. A compact vertical that requires NO radials. This antenna is so new they haven't had time to develop an ad.

Sold out at Dayton and Dallas!

BUY AMERICAN, BETTER PRICE AND QUALITY



"BURN-IN" rack and keyed down for 24 hours non-stop at full power CW. Don't try that with the foreign radios. 4) EVERY SG2000 is then re-checked for alignment and put in the "TORTURE RACK" where they are keyed on and off every 10 seconds for 24 hours. 5) The SG2000 is then re-evaluated and all control functions are verified to ensure that the microprocessor is up to spec. THEN AND ONLY THEN IS THE SG2000 ALLOWED TO LEAVE THE FACTORY.

The bottom line is price, you know how expensive commercial rigs are normally, we are selling the SG2000 BELOW DEALER COST at only \$1,585.00 each!! That's a \$400.00 savings! We guarantee the best price.



To order, send check or money order with \$8.50 for shipping, along with your shipping address (sorry no U.S. Post Office Boxes, UPS will not deliver) and Telephone number to:

Joe Brancato
THE HAM CONTACT
PO Box 3624, Dept 73
Long Beach, CA 90803

CA Residents Add 8 1/4% Sales Tax. Alaska, Hawaii, and Canadian Residents please send U.S. Money Order + \$17.10 for shipping.

If you wish more information please send a SASE to the above address. For COD orders, call (310)433-5860, outside of CA Orders Only call (800)933-HAM4 and leave a message.



Serving The LORD
Since 1967

Guaranteed
Best
Prices

CIRCLE 384 ON READER SERVICE CARD

Ever wish
you had a radar gun
in your car?



The **ZAPPER** is an
awesome Answer!

This magic-like little box activates any radar detector within 3/4 of a mile. Watch the brake lights come on the speeding sports car that just flew by. Keep those speeding big trucks from eating your bumper. The **ZAPPER** is a 10GHz amateur transmitter the size of a cigarette pack, operates on a 9v battery. Complete with road game "Trolling for Tailights".

Built & tuned only **\$49⁹⁵** Plus \$5.00 S&H

TRANSEL
TECHNOLOGIES
MADE IN USA

123 East South Street
Harveysburg, Oh 45032
1-800-829-8321

CIRCLE 11 ON READER SERVICE CARD

Amateur Radio Via Satellites

Andy MacAllister WA5ZIB
14714 Knights Way Drive
Houston TX 77083-5640

Satellite Portable

I go fishing at least once a year with a small group of friends. The goal is to get away from the city, while chasing fish is secondary. We use ham radio to communicate between boats and always try out some new idea for satellite chasing after a day out on the water.

This year a new antenna from Cushcraft looked like a good candidate for portable hamradio work. The antenna is a dual-band, linearly-polarized yagi called the A270-10S. It has five elements on 70 cm and five on 2 meters. The two yagis are mounted in the same plane, but on opposite sides of the boom. The antenna comes with aluminum components, stainless hardware and a wiring harness allowing a single coax cable feed. While this arrangement is fine for dual-band rigs, separate feedlines were more appropriate for the multimode single-band rigs on hand.

Antennas tried in previous years for 2 meters and 70 cm included short crossed-dipole systems from KLM and Cushcraft, small quads from Lightning Bolt Antennas, ground planes from Lakeview, and even an AEA HR-1 telescoping half-wave HT whip. All of the antennas tried have been useful, depending on the satellite and local working conditions. While the ground planes did well for low-earth-orbit (LEO) satellite contacts, they were quite difficult to use for AMSAT-OSCAR-13 in its high elliptical orbit due to the weak signal levels. Crossed yagis were better for A-O-13 due to their polarization compatibility and higher gain, but they were harder to transport and, due to the lack of rotators, very difficult to use for LEO hamsats.

The short dual-band yagi from Cushcraft provided several A-O-13 contacts from a camera tripod mount. The antenna was mounted near its

balance point rather than at the rear. To help make up for the antenna's lack of gain, a good quality preamplifier was used on 2 meters and a 100-watt linear employed for the 70-cm uplink. Antenna alignment was accomplished with a compass from the Scout shop and an inclinometer from the hardware store. Aiming predictions were printed prior to the trip.

Contacts were few on the low-orbit satellites using this antenna, due to a lack of rotators or volunteers. For a small home installation some very inexpensive rotators could be incorporated for azimuth and elevation because of the light weight and small size of the A270-10S. As a portable or emergency VHF/UHF satellite antenna, it's a good performer.

RS-12

While the contacts on A-O-13 were fun to make using the simple portable system, chasing RS-12 was like getting back to the days of Sputnik-1 but proved to be more difficult than anticipated. RS-12 is currently running Mode K, the HF mode, which calls for a 15 meter uplink and a 10 meter downlink. Sputnik-1 transmitted just above 20 MHz. At our lakeside station, a NCG Co. Model 15M mobile transceiver was tried with a modified "CB" magnet-mount, base-loaded whip for the uplink. A Uniden HR-2510 transceiver and a dipole were used for reception. Downlink signals were strong, but the low-power output of the NCG 15M did not produce any contacts. We could hear the resulting downlink from our 15 meter transmissions, but were not having any luck catching the attention of others.

As the upper shortwave bands decline in long-distance usefulness due to the present sun-spot cycle, the use of Mode K gets easier. Activity on the satellite has increased dramatically and it has become harder to compete for a contact.

RS-12 is part of a larger civilian navigation satellite, COSMOS 2123,



Photo A. Portable satellite rigs for 15, 10, 2 and 0.7 meters.

launched by the former USSR on February 4, 1991. RS-13 is another part of the system, but is not currently in use. RS-12 is capable of three different modes including "A" with a 2 meter uplink and 10 meter downlink, "T" using 15 meters up and 2 meters down, and K. The satellite is also able to run dual simultaneous modes using "KA" or "KT." Almost since launch, however, RS-12 has been running K.

The K transponder system on RS-12 is 40 kHz wide and non-inverting. This means that an upper sideband (USB) signal sent by a ground station high in the transponder input band will come out as a USB signal, high in the transponder output band. For RS-12, the uplink band goes from 21.210 to 21.250 MHz, and the downlink is from 29.410 to 29.450 MHz. The main CW telemetry beacon can be heard on 29.408 MHz. Unlike other hamsats, RS-12 transponder operation requires at least an Advanced Class license due to the uplink frequencies; however, the lower 15 kHz of the transponder uplink are in the Extra band.

After the failure to effect contacts from the fishing site, attempts were made employing the home system. Using a 25-year-old HF transceiver for the uplink and a 15-year-old HF transceiver on the downlink in conjunction with dipoles in the attic, several contacts were easily made during the first 15-minute pass. The increased number of users on RS-12 heightened contention for the limited space in the 40-kHz-

wide transponder. The typical RS-12 operator was using more power, single transceivers and sometimes a beam, or at least a good outdoor antenna. This was verified by a survey over the air and from QSL cards.

Many of today's amateur HF transceivers can operate crossband, i.e. they can be used to monitor one band (like 10 meters) and transmit on another (15 meters for example). While they cannot operate full duplex (simultaneous receive and transmit), a few calculations and some practice provide prospective RS-12 users with methods for satellite operation. RS-12 operators have discovered that Doppler shift is minimal on HF. When transmitting on 21.240 MHz, the downlink will be within a kHz of 29.440 MHz. Since the transponder is linear, the same correlation holds true throughout the 40 kHz passband. Many hams have avoided RS-12 activity due to the problems encountered with a 15 meter transmitter in close proximity with a 10 meter receiver. Those with only one HF rig don't even know about the problem, they just make contacts. After chasing digital satellites and high-orbit, high-tech hamsats, RS-12 is a refreshing change—back to basics.

Check *The RS Satellite Operating Guide* by G. Gould Smith WA4SXM for more information about the RS-series hamsats. The booklet is available from AMSAT at (301) 589-6062, or you can write to them at 850 Sligo Avenue, Suite 600, Silver Spring MD 20910. **74**

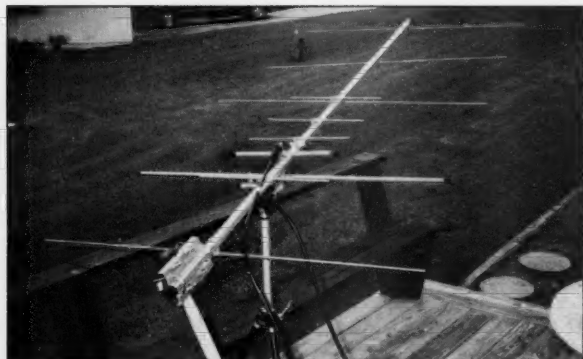


Photo B. A Cushcraft A270-10S dual-band yagi on a camera tripod did a great job for some A-O-13 Mode B contacts.



Photo C. Andy WA5ZIB at the controls during an A-O-13 pass. (Photo by Stuart Ross.)

RTTY LOOP

Number 12 on your Feedback card

Amateur Radio Teletype

Marc I. Leavey, M.D., WA3AJR
6 Jenny Lane
Baltimore, Maryland 21208

How RTTY Works

I am constantly reminded by your correspondence that many "RTTY Loop" readers have not been in digital communication these past few decades. Even some of you old-timers (whose original ham tickets pre-date my birth certificate) are just now barely getting started in RTTY, packet, or the like. Thus, I often find more basic questions mingled in with letters about this or that program, computer, or piece of equipment; such as "Just how is RTTY transmitted, anyway?" This month's column is addressed to that segment of the readership. To those of you who already know all this, you are excused. For those who want a quick refresher, jump to the end of the article. The rest of you, here we go.

Unlike CW, where the various letters of the alphabet, figures, punctuation, and special functions are represented by groups of long and short signals ranging in length from one unit

(the letter E) to 20 or more, the various forms of radioteletype each use a unique vocabulary of alphabets. While none of these alphabet sets is exactly the same, they each share one characteristic. Within each set, each character is precisely the same number of bits as any other.

The two most common alphabet sets used are the five-level code commonly called "Baudot" (but more properly called "Murray"), and the seven-level code commonly called ASCII, which is also represented as an eight-level scheme in some circles.

Having established that, the next problem is how to send these codes along a radio circuit. The most direct means would be to key a CW transmitter directly with the TTY pulses. The result is often called "ON-OFF" keyed RTTY. ON-OFF keying was, in fact, the earliest method used to transmit TTY over the air. Advantages are related to simplicity in transmitting: merely hooking the teleprinter to the key jack. Receiving is also easy, with simple demodulation of a single tone. Disadvantages relate primarily to interference

susceptibility and fading. A nearby CW signal can wipe out an ON-OFF RTTY station, and fading can remove letters or words.

A better way to send RTTY is by presenting a constant signal for the MARK, or resting, state and changing it in some way for the SPACE, or signaling, state. Changes may be introduced in amplitude, frequency, or by a superimposed modulating waveform. Direct amplitude modulation with the RTTY signal approximates ON-OFF keying, with all of its attendant flaws. Some fancy forms of modulation will be discussed at the end of this column, but the two most-used ham techniques are FSK and AFSK.

FSK

In FSK or frequency shift keying, a carrier is shifted in frequency to correspond to the MARK and SPACE frequencies. Figure 1 (b) diagrams this nicely. Like those that follow, this is a redundant system. That is, information is obtainable by looking at either MARK or SPACE, even in the absence of the other one. Remember that in ON-OFF keying, if you lose the SPACE you have a steady MARK, and if you lose the MARK you have nothing! Transmission of FSK is accomplished by shifting the transmitter VFO in step with the RTTY signal, and reception by decoding either or both the MARK and SPACE. Done properly, this system is very immune to interference and, since fading normally affects only one of the MARK or SPACE frequencies at a time, proper use of the built-in redundancy makes fading no problem, either. The frequency shift involved may be anything from kilohertz to fractions of a hertz, which might be more properly called "phase shift." In amateur circles, the standard shift these days is 170 Hz, while for many years, a shift of 850 Hz reigned supreme.

AFSK

Unfortunately, FSK presumes very stable transmitters and receivers. The level of shift is less than 1 kHz, and drift in the VFO of any significant degree would be intolerable. Early VHF transmitters could not maintain this degree of stability. Use of an audio tone, shifted in frequency in a manner similar to FSK, became the standard on VHF. Take a look at Figure 1 (c). This AFSK is quite useful in its own right, and note that the MARK, which is the lower frequency in standard FSK, becomes the higher frequency in standard AFSK.


Now, some fancy stuff. What if I send a pulse during each 22 ms window which represents a bit at 45.45 baud Baudot speed? By changing the pulse's amplitude or position within the window, I could encode MARK and SPACE with a decodable system. Figure 1 (d) shows what I mean. Such Pulse Amplitude Modulation (PAM) or Pulse Position Modulation (PPM) is not used much in the amateur service, but it is neat, right?

Overall, these techniques remain the standards, whether at that fabled 45.45 baud Baudot, or even at super-speed packet. With experience, one can even begin to appreciate the subtleties which make a RY sound different from a CQ. When you begin to copy straight text by ear, though, tell me about it!

As always, I look forward to your comments, questions, and comments. On Delphi (username MARCWA3AJR), you will find the "RTTY Loop" index and at least the first in the series of "RTTY Loop" software collections in the Radio SIG's data library. I often check in there as well, so feel free to leave me messages there. Email can be sent on Delphi, as well as CompuServe (ppn 75036.2501), America Online (MARCWA3AJR), or via Internet (MARCWA3AJR@aol.com).

MoTron Electronics

310 Garfield St. Suite 4 PO Box 2748 Eugene, Oregon 97402



This is an actual Fingerprint captured by the TxID-1

TxID-1

Transmitter
Fingerprinting
System

Now Shipping!

FWAM radio transmitters have a unique frequency versus time start-up characteristic—even radios of the same make and model. This "Fingerprint" can be captured, stored and analyzed. Our exclusive TxID Software and the patented technology of the TxID-1 IBM/Compatible circuit board can help you identify the abusers on your repeater! Or help you keep track of the number of radios per account on commercial repeaters. CTCSS and DTMF decoding, as well as Spectrum Occupancy and Deviation measurement features further enhance the system.

Call or write for a brochure with full details, additional examples, and technical specifications.

TxID-1 with Software \$699.00

Shipping/Handling UPS Ground USA: \$8.00
Visa/MC and AMEX accepted. COD on cash or Money Order basis only.
Government Purchase Orders accepted.

Orders: (800) 338-9058

Info: (503) 687-2118 Fax: (503) 687-2492

IMPROVE YOUR LOOKS, HEALTH AND POPULARITY.



QUIT SMOKING.

American Heart
Association



© 1992, American Heart Association

CIRCLE 248 ON READER SERVICE CARD

FREE CATALOG! 1-800-345-8927
JERROLD HAMLIN OAK ETC.
CABLE TV DESCRAMBLERS

- Special Dealer Prices! • Compare Our Low Retail Prices!
- Orders From Stock Shipped Immediately except to Calif.
- Guaranteed Warranties & Prices! • All Major Credit Cards

PACIFIC CABLE CO., INC.

7325 1/2 Reseda, Dept. 1872 Reseda, CA 91335
 For catalog, orders & information 1-800-345-8927

CIRCLE 178 ON READER SERVICE CARD

GIVE YOUR
HR-2510 HR-2600

the same features as the

"BIG RIGS"

CHIPSWITCH

4773 Sonoma Hwy. Suite 132
 Santa Rosa, CA 95409-4269

Write or call (707) 539-0512 for FREE information


CIRCLE 265 ON READER SERVICE CARD

Subscribe to
73 Amateur Radio Today
 Call 800-289-0388

ULTIMATE MODIFICATION BIBLE

MOST COMPLETE,
GREATEST IN ITS TIME!!!
 OVER 800 MICRO WIRINGS CB/HAM.
 OVER 186 MOD. HAM RADIOS.
 OVER 60 COMPLETE CRYSTAL CHARTS.
 OVER 20 MOD. CRYSTAL CHARTS.
 OVER 18 SCANNER MOD.
 TEN METER RADIO MOD.
 LINEAR/COAX ANT. INFO.
 OVER 200 PAGES OF INFO.

KDC SOUND 1-800-256-9895
 5 PINE MEADOW \$29.95
 CONROE, TX 77302




CIRCLE 151 ON READER SERVICE CARD



ZD ENGINEERING

Specialists in CATV Hardline Matching
 Transformers, Power Dividers and Related R.F.
 Devices.

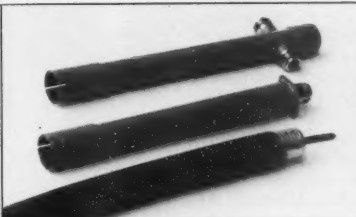

Built to fit 1/2, 3/4, and 7/8 inch hardline, or can be custom built for other sizes of hardline and any frequency between 50 MHz and 1.3 GHz. When ordering, please include a 4 inch section of your hardline and specify the design frequency you need.

144 MHz units are \$34.95 per pair. 222 MHz, 440 MHz, 903 MHz and 1296 MHz units are \$32.95 per pair.

Add \$5.50 per pair UPS shipping (U.S. only).

Ohio residents add 5.5% sales tax.

Custom built prices on request.

ZD ENGINEERING

Paul H. Darvactor, W8ZD,
 605 Balsey Avenue, Findlay, OH 45840
PHONE: 419-424-8765

Quality Microwave TV Antennas

WIRELESS CABLE - IFTS - MMDS - Amateur TV
 Ultra High Gain 50db (+) • Tunable 1.0 to 2.7 GHz.

- 55-Channel Dish System \$199.95
- 36-Channel Dish System \$149.95
- 20-Channel Dish System \$124.95
- Optional Commercial Grid Antenna (not shown) Add \$50.00
- Yagi Antennas, Components, Custom Turning Available
- Call or write (SASE) for "FREE" Catalog

PHILLIPS-TECH ELECTRONICS
 P.O. Box 8533 • Scottsdale, AZ 85252
 (602) 947-7700 (\$3.00 Credit all phone orders)
 MasterCard • Visa • American Express • C.O.D.'s • Quantity Pricing

CIRCLE 249 ON READER SERVICE CARD

Say You Saw It In
73 Amateur Radio Today

LASER CUT CALL SIGNS



Call Signs laser cut in maple laminate wood, light front with dark relief.

- 1" Char's on 1/2" Base \$2 per Character
- 2" Char's on 1/2" Base \$4 per Character
- 3" Char's on 1" Base \$6 per Character

Shipping included

CAM LAZERCUT SIGNS

P.O. Box 1090, Enfield, CT 06083-1090, 203-741-8465

CIRCLE 239 ON READER SERVICE CARD

HamWindows

Your gateway to the world.

Software that combines the amateur radio
 with a personal computer.

HamWindows, Inc., 2121 E. Pacific Coast Hwy., Suite 120C
 Corona del Mar, CA 92625
 (714) 729-4222 FAX (714) 444-6277

CIRCLE 345 ON READER SERVICE CARD

Sell your product in **73 Amateur Radio Today** Call Dan Harper today! 1-800-274-7373

W9GR DSP II

What is DSP? DSP allows the "construction" of various filters of great complexity by using computer code. This allows us to have easy access to a variety of filters, each perfectly optimized for whatever mode we are operating. The DSP II has been designed to operate in 10 different modes. Four filters are optimized for reducing interference to SSB phone signals from CW, heterodynes and random noise interference. Four more filters operate as "brick-wall" CW bandpass filters. The remaining two filters are designed for reliable recovery of RTTY and HF packet radio information signals. A single front panel switch selects any of these filters. Easy hookup to rigs speaker jack.


- The W9GR DSP II is the most popular DSP on the market — Thousands in use worldwide!

W9GR DSP Filter.....\$299.95 12V DC Power Supply.....\$11.95



SDP-600

Make and receive phone calls from your mobile rig or handle-talkie with your own personal autopatch. Connection is easy — just hook-up to the mike and speaker jacks on your base station rig and plug into the phone line! Complete control is assured through touch-tone access codes that you set and change at will. Long distance toll access is controlled by special code that you set, preventing fraudulent usage. All programmable codes and set-ups are stored in special non-volatile memory immune to power failures. Repeater owners use the SDP-600 as well for reliable and solid repeater autopatches. Power required is 12 volts DC at 100 MA. Experience the freedom of owning your own autopatch, on your own frequency, to use when and as you wish. The SDP-600 is made in the USA and carries a one year warranty.



SDP-600 Personal
 Autopatch, fully wired
\$249.95

SDPA 12 volt power
 supply unit.....\$11.95

j•COM • 793 CANNING PKWY • VICTOR, NY 14564

HamBase 1994

New data! New Program!
 Great Circle Beam Heading

HamBase 3.06 is packed with all of the new features
 you have been asking for:

- Browse by Name.
- Browse by Callsign.
- Browse exported Files.
- Export data in all the popular database formats.
 Address labels; Fixed format; Delimited by commas, tabs, comma-quotes; callsign only.
- Generate mailing labels from Callsign Lists.
- Color menus and popup Help screens.
- Export lists by State, County, and Zip Code.
- Split databases to multiple hard drives and floppy disks.
- Same Low Price. HamBase 1994 is only \$49.95.

Available in 3 1/2" or 5 1/4" IBM PC format (specify)




Throw away your
 magnifying glass...

j•Com Transceiver Control Computer Interface

The j•Com Transceiver Control Computer Interface is functionally identical to the **Kenwood IF-232C, Icom CT-17, Yaesu FIF-232C, Ten-Tec 305 and Heath** computer interfaces. It will work with all radios and rig control software which use these interfaces.

- No external power supply is necessary. The j•Com TC interfaces require very little power for operation. This power is obtained directly from the computer COMM port.
- All electronics are enclosed in the shielded DB-25 connector hood. RFI susceptibility and radiation is reduced.
- Fully assembled and tested.
- Fully Hardware and Software Compatible. Works with all rig controlled software — Free shareware disk included!



\$54.95

ORDERS CALL 1-800-446-2295 ORDERS ONLY

TECH/ORDER/INFO (716) 924-4560 FAX (716) 924-4555



TERMS: Satisfaction guaranteed. Examine for 10 days. If not pleased return in original form for refund. Add \$4.95 for shipping, handling and insurance. For foreign orders add 20% for surface mail. C.O.D. (U.S. only) add \$5.00. Orders under \$20 add \$3.00. NY residents add 7% sales tax. 30-day parts warranty on kit parts. 1-year parts & labor warranty on wired units.

RAMSEY ELECTRONICS, INC. 793 CANNING PARKWAY VICTOR NY 14564

CIRCLE 55 ON READER SERVICE CARD

Low Power Operation

Michael Bryce WB8VGE
2225 Mayflower NW
Massillon OH 44646

There seem to be a lot of people who feel the same way I do about the Ten-Tec Argosy. The amount of mail I received on the series about the Argosy tells me that we should take one more look at this surprising little rig.

The Argosy Revisited

First, I would like to thank all those who have sent me copies of the *Ham Radio* article I mentioned earlier. That article was written by Cornell Drentea WB3JZO, and appeared in the November 1986 issue of *Ham Radio*. The article, "Upgrading the Ten-Tec Argosy," is must reading if you own one of the first Argosys built by Ten-Tec. Also, the January issue of the *QRP Quarterly* has an excellent article by WB3JZO with updates from his *Ham Radio* piece.

Linear Amplifier Switching

Although the Argosy can produce only 50 watts of RF output, you can use this rig with an external amplifier; provided you have some means of controlling the T/R function of the amplifier. Ten-Tec used a small T/R module installed inside the rig. That module, model 1126, is no longer available but that's not a problem because you can roll your own with just a handful of parts. A small piece of perfboard would be ideal for this project. Figure 1

shows the complete T/R switch for an external amplifier.

Its operation is very simple. When the "T" voltage goes +12 during transmit, it charges the 33 mF capacitor. This turns on the switching transistor and pulls in the relay. The capacitor is discharged through the delay control. Any time the Argosy goes into transmit the relay will close. The contacts from the relay are routed to the "spare" phono jack on the rear apron.

The circuit board mounts on the side panel in the left rear corner. There are two mounting holes for the original board; they will work just fine for our home-brew circuit as well. The cable plug is there, too. The colors are violet, red, and yellow. This plug is hidden by the wire harness. Using an 0.100 center header, you can just plug it in. Of course, you have to wire your header correctly to mate with the rest of the circuit. This is the type of circuit I like. It's simple and oh so easy to get working.

Improved RF Gain Control

While neither the Argosy nor the Argosy II came with an RF gain control, you can add your own. Ten-Tec's technical note TN2-525 is the official version of an RF gain control. If you use the values in the technical note, you'll end up with an RF gain control that functions over only 40 percent of its range. The solution is to insert a 10k resistor from the other end of the pot to ground. This expands the tuning

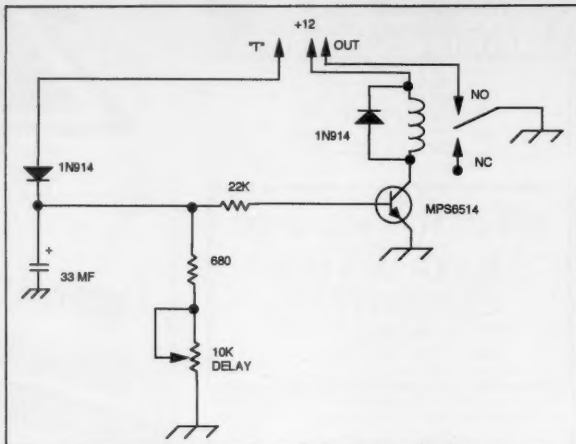


Figure 1. Amplifier T/R switching for the Argosy.

range of the RF gain pot. The MC1350 IF amplifier is controlled by a very narrow voltage range in the rig. This "RF Gain" voltage is only 1.5 volts, the difference from 5.0 to 6.5 VDC applied to the MC1350. The new RF gain control should provide 5 to 6.5 volts to the

By far, the easiest method of installing an AGC switch into the Argosy is to unsolder D9 from R26 on the IF/AF board (80785). A better method is to bring one side of R58 to a switch, with the other side of the switch grounded as shown in Figure 2. If you

"If you're really into contests, or weak signal CW work, then you might want to check out this modification."

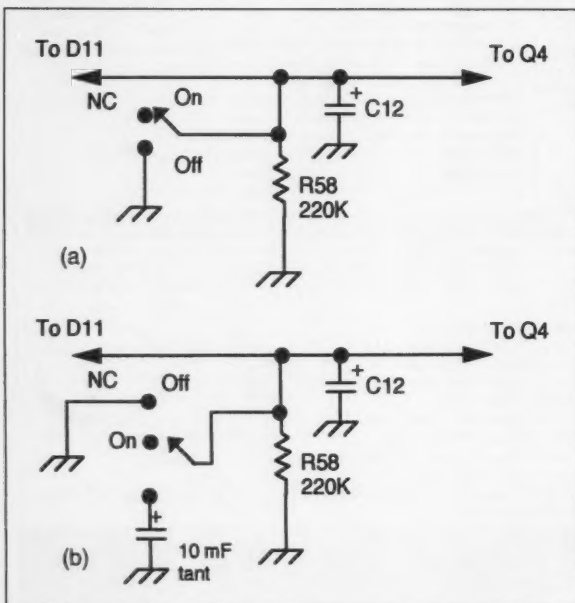


Figure 2. a) Simple AGC for the Argosy. b) AGC with fast/slow time constants.

junction of D9, D10 on the IF/AF board. Again, this modification is only for the Argosy. I don't know of any for the Argosy II, but I'm sure they're out there. Readers?

Selectable AGC Time Constants

Personally, I think the AGC works just fine in my Argosy II. But if you're really into contests, or weak signal CW work, then you might want to check out this modification.

use a three-position switch, you'll end up with three AGC time constants: slow, fast and AGC off. Use a high quality capacitor for the AGC circuit. Tantalum or low leakage electrolytic capacitors are the best ones to use. The values shown provide a good compromise between CW and SSB time constants.

There's no place on the front of the Argosy to install such a switch. It's going to be a challenge to find a place for

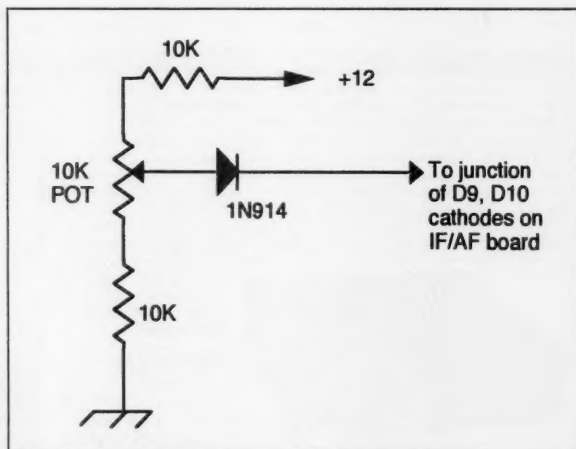


Figure 3. Improved RF gain control for the Argosy.

it—even the rear apron is getting kinda busy. A small toggle switch might fit if you do some forward thinking before you start drilling.

If you have not installed the RF gain control you can pass on turning off the AGC. But by wiring the noise blanker on all the time you can use the blanker's switch to select between two time constants. Again, you don't want to turn off the AGC unless you have installed the RF gain control.

Improved Noise Floor

This modification came from Cornell Drentea in his *Ham Radio* article. It's so simple I had to include it in this column.

The original Argosy has a very high noise floor. It's enough to make weak signals impossible to hear. The noise came from the BFO sidebands spilling over to the high gain audio amplifier. This "hiss" obscured signals below S3. The fix is simple: Change C34 from 0.01 to 0.1. This change will reduce the hiss to a point you'll easily hear without test equipment! Capacitor C34 is located on the IF/AF board.

Reduced Hum Pickup

This has always been a problem with Ten-Tec rigs. The power switch runs 110 AC through the main chassis. High gain stages can pick up any

stray AC and pass it from one stage to the other. There are two fixes. Run the rig from a battery supply. Or, you can disconnect the AC control line from the power supply (internally, so the power switch inside the rig is dead) and use the main power switch on the supply to turn the rig on and off.

You might want to try shielding the power line inside the Argosy with aluminum foil. Copper mesh screen would be ideal, but that stuff is almost impossible to find anymore. Be sure you ground the shielding in several places to avoid ground loops.

keyer PC boards.

Several of the modifications for the Argosy require the use of a dual concentric pot. Mouser electronics carries some of the more common values. Dig-Key also carries some dual pots. The only problem is finding a set of matching knobs. You can use a set of knobs from Ten-Tec. They used dual controls on both the Corsair and the Argonaut II, but they won't match the ones used on the Argosy. Since Ten-Tec makes their own knobs, along with other stamped out pieces parts, you'll never find an exact match that fits.

before you attempt this adjustment. More than likely, you'll find the receive current to be within specifications. If not, look at the bias adjustment.

A Word of Caution

Before you start digging inside your Argosy, be sure you know what you're doing! Some of the modifications presented here and in the *Ham Radio* article require the complete teardown of the rig. If you don't feel secure about such projects, then it's best to pass them by. If you want to try some of these modifications, install only one at a time. Test the rig for proper operation before you start on the second modification. Test again and then move on until you're done modifying the rig. I can't say if all the modifications presented here work—I haven't done too many of them on my Argosy II.

"Before you start digging inside your Argosy, be sure you know what you're doing!"

Internal Keyer

If you don't have the T/R control board inside your Argosy you can use that space to install your favorite electronic keyer. All you need to do is add the proper three-wire jack for the key paddles, and of course the keyer speed control. The popular Curtis keyer on a chip would be ideal. Several PC boards have been designed using this chip. Check available QRP books for suggested Curtis

Standby Current

A higher-than-normal receive current may be traced to an improperly adjusted final PA bias. Although it's an adjustment that should not be touched, it's relatively painless to reset. All you need is an ammeter in series with the VCC line to the PA. Adjust trimmer R1 on the PA board until the current is 30 mA. The trimmer is kinda hard to reach, so measure the receive current first

Better-Sounding Argonaut II Audio

I found that you can really make the Argonaut II sound much better just by using an external speaker. The one inside the rig is way too tinny-sounding for me. I use a Minus speaker from Radio Shack. The black metal one is just about the right height and style to match the Argonaut II. It's too bad Ten-Tec did not offer an external speaker for the Argonaut II/Delta II.

From the publisher of *Monitoring Times* comes...

Satellite Times™

A Division of Grove Enterprises, Inc.



The FIRST full-spectrum monitoring magazine for space!

Are you looking for the best news, information and ideas you can get for monitoring satellites? **Satellite Times** covers every aspect of space communications—from commercial, military and broadcast, to amateur, scientific, government, and even private satellites.

Every bi-monthly issue is filled with up-to-date topics and will bring you into a new era of monitoring.

ST will give you the knowledge you need to successfully monitor and utilize all forms of satellite communications.

Subscribe NOW to the NEW LEADER of satellite magazines!

U.S. Subscription

- One Year (6 issues) \$16.95
- Offer Expires 12-31-94
- Regular subscription rate \$19.95

Foreign Surface Mail

- One Year (6 issues) \$23.95
- Offer Expires 12-31-94
- Regular subscription rate \$26.00

Satellite Times™

(800) 438-8155

PO Box 98
Brasstown, NC 28902
(704) 837-9200 (Outside Canada and US)

CIRCLE 280 ON READER SERVICE CARD

Joseph J. Carr K4IPV
P.O. Box 1099
Falls Church VA 22041

Using the "Spectra Plus" Spectrum Analyzer Software

A spectrum analyzer is a device that will permit you to look at a signal in terms of amplitude vs. frequency, rather than the normal oscilloscope amplitude vs. time presentation. All signals can be depicted as a fundamental sine wave, plus a number of additive sine and cosine harmonics. The particular shape of any given signal is set by the particular harmonics and phases present. It is possible to analyze the general spectrum by looking at the waveform, but for particular and accurate information you need to use a spectrum analyzer.

Professional spectrum analyzer instruments are costly, and beyond the financial capabilities of most amateur radio operators. Some people have

been successful in building their own spectrum analyzers, but even these instruments get pricey when capability goes up (especially frequency resolution and accuracy of the frequency display).

Now you can use IBM-compatible computers to do audio spectrum analysis of signals, including signals received off the air . . . If you have a sound board compatible with at least the 8-bit SoundBlaster board. The sound board serves as an analog-to-digital converter to translate the analog audio signal into a series of digital data that can be digested by the computer.

The spectrum analysis software is "Spectra Plus Ver. 2.0" by Pioneer Hill Software, 24460 Mason Road, Poulsbo WA 98370; (206) 697-3472. Hardware requirements are rather modest by today's standards: a 386 or later IBM-compatible machine with 2 Mbyte of memory minimum, or 4 Mbytes for recording; a VGA monitor capable of



Figure 1. 100 Hz sine wave.

at least 16 colors (which is about all of them, except for monochrome), 1 Mbyte (plus space for audio files, which can be large) hard disk space available; Windows software; a sound card (16-bit recommended, but 8-bit will work); and a mouse or trackball.

There are three modes and four functions: Real-Time, Recorder and Post-Processing. The Real-Time mode accepts digitized audio directly from the sound card, and then analyzes the waveform and displays the results. Although the program can be run indefinitely, the raw audio data cannot be saved in a disk file.

The Recorder mode digitizes the input audio signal, and stores it on the hard drive in a .WAV file (the standard audio file format). These files can later be analyzed in the Post-Processing mode or played back through an audio system. My wife is a musical composition student; she can use the SoundBlaster card in our computer to digitize sounds and use them as a synthesizer. The "Spectra Plus" can control the process, as well as analyze the spectra of the waveform.

The Post-Processing mode processes recorded audio data, whether from the record mode above or from

other sources. It looks for a .WAV file. More of the functions of the software work with this mode than with Recorder or Real-Time.

The functions of "Spectra Plus" include Time Series, Spectrum, Spectrogram, and 3-D Surface Plot. The time series is the ordinary amplitude vs. time display that one sees on an oscilloscope. In this mode, the digitized audio is seen in the Volts/Time display on the computer screen, and it can be printed.

The Spectrum function analyzes the audio signal, and then produces an amplitude (volts) vs. frequency display (examples given below).

The Spectrogram produces a display that has frequency spectrum along the vertical axis, and time along the horizontal axis. This type of display is useful for seeing the time history of the spectrum, i.e. how the frequency content of a waveform changes over time. This mode can be used for analysis of "Whistlers," i.e. those low frequency ELF radio signals emitted by distant lightning strikes. Note well, however, that this mode works well on the screen, and prints well on a color printer, but its printout on my Laserjet III is pukey.

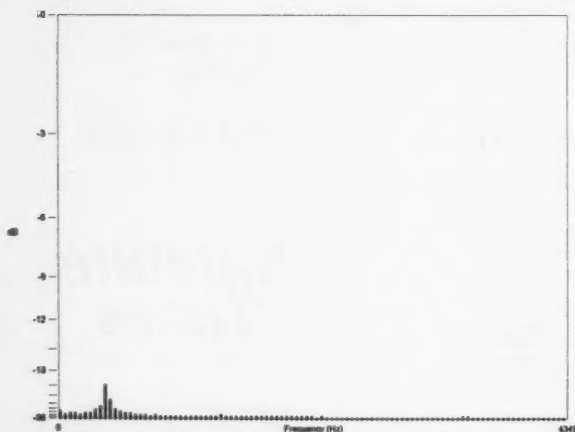
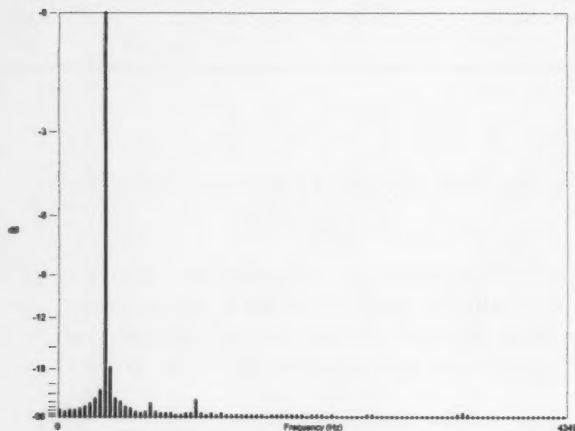


Figure 2. A) CW station emitting dashes. B) Apparently, a CW backwave as it appeared between transmissions.

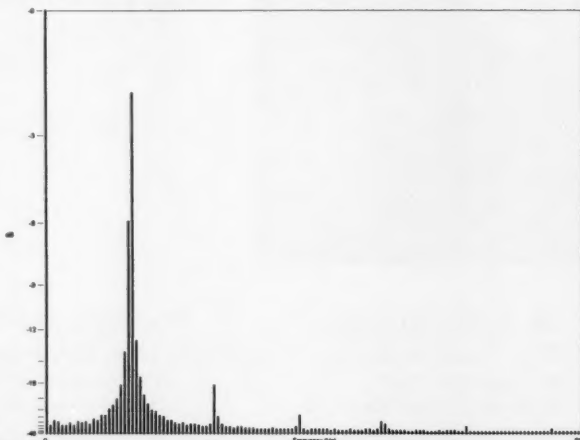


Figure 3. AM signal modulated with 1000 Hz.

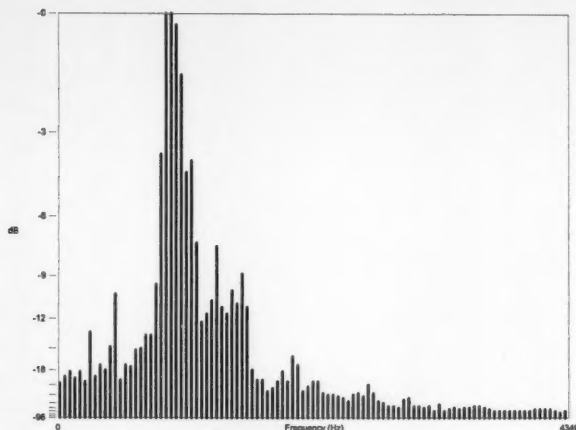


Figure 4. 40m SSB motor-mouth signal.

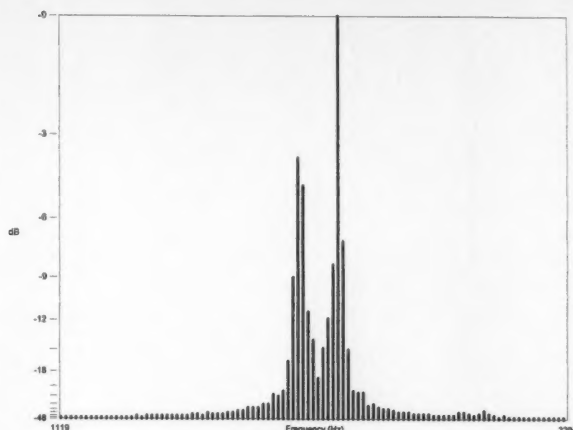


Figure 5. RTTY signal with 200 Hz spacing.

The 3-D surface plot displays a three-dimensional perspective of the spectrum over time. It appears to contain amplitude information, frequency information and time information.

"Spectra Plus" Display Examples

Figure 1 shows a spectrum of a sine wave from a signal generator. Note the single frequency spike (which you would expect from a pure sine wave), plus some noise along the baseline. This sample was a 100 Hz sine wave digitized in 16-bit mode at a

rate of 44 kHz using my SoundBlaster Pro-16 sound card. The signal source was my bench function generator. Note that the amplitude scale along the vertical axis is normalized to make the large spike 0 dB, and all other features as negative dB. The frequency calibration along the horizontal axis is printed out to nearly 8,700 Hz, and shows no additional harmonics.

Figure 2A shows a CW station transmitting a series of dashes. This signal was recorded off the air using a communications receiver with an 2.7

kHz SSB filter. Note that the main signal is a large spike (as expected, with a series of sidelobes along the baseline, plus what appear to be harmonics. Note that the signal does not have zero bandwidth, which explains why a filter with 100 or 250 Hz (or so) is used for CW. Figure 2B shows the same station a few moments later with the carrier turned off. It appears that it is emitting a rather serious backwave, i.e. a signal that passes through the final amplifier even when the rig is ostensibly not transmitting. That would

be good info to know if my interpretation of the waveform is correct.

The display shown in Figure 3 is an AM signal from my signal generator. The sig-gen was tuned to an AM BCB frequency, and was modulated with its internal 1,000 Hz sine wave oscillator (which is a tad distorted). Note that the sidebands extend out quite a distance. I suspect the distance the sidebands extend from the carrier is a result of the clipped positive peak I've noted on the modulated signal, and also on the raw modulating 1,000 Hz sine wave.

SERIES MODE

Powerline surge protection

- **EFFECTIVE**— required protection for interconnected or networked equipment
- **RELIABLE**— non-sacrificial design
- **SAFE**— Uses no MOVs

Award winning Series Mode technology eliminates the destructive energy of surge voltage and surge current!

Call or write for full details today. Ask about your ham operator/club discount.

ZeroSurge Inc.

944 State Rt 12 Frenchtown NJ 08825
800-996-6696 FAX (908) 996-7773

CIRCLE 268 ON READER SERVICE CARD



Handheld Repeater Controller

Spectrum Electronic Products introduces the world's first and programming, hang handheld repeater controller. And time-out timers, Digital No larger than most handheld Voice Operated Squelch radios, the HRC-10 converts (DVOS™), telemetry tones, a single or dual-band radio and private voice mail slot. into a full featured simplex or duplex repeater system. Key features of the HRC-10 in-

\$299

CIRCLE 69 ON READER SERVICE CARD

45,296 ELECTRONIC COMPONENTS

Whether you order 1 part or
all 45,296...MOUSER stocks
and...ships same day!!

CALL...(800) 992-9943



for your
**FREE
CATALOG**

2401 Hwy 287 N.
Mansfield, TX 76063

**MOUSER
ELECTRONICS**

Sales & Stocking Locations Nationwide

CIRCLE 64 ON READER SERVICE CARD

Why buy a TNC?

PC HF FAX + PC SWL \$179.00

SPECIAL COMBINATION OFFER

For a limited time, if you order PC HF FAX \$99 (see our other ad in this issue), you can add our new and improved PC SWL 3.0 for \$80.00 instead of our regular low price of \$99.00.

PC SWL contains the hardware, software, instructions and frequency lists needed to allow you to receive a vast variety of digital broadcasts transmitted over shortwave radio. All you need is any IBM PC or compatible computer and an SSB shortwave receiver. The product consists of:

- Demodulator
- Digital Signal Processing Software
- 200 Page Tutorial Reference Manual
- World wide Utility Frequency List
- Tutorial Audio Cassette with Samples

PC SWL automatically decodes Morse code, RTTY, AMTOR, SITOR, NAVTEX and ASCII. PC SWL lets you tune in on world press services meteorological broadcasts, ham radio operators, coastal shore stations, aviation telex and much more digital action on the shortwave bands. Why pay for another expensive box when a simple interface and your PC can do the job?

ADVANCED FEATURES:

- Tuning Oscilloscope
- Digital Waveform Presentations
- Auto Calibration and Code Recognition
- Continuously Tunable Filter Frequencies
- Variable Shift
- Adjustable CW Filter Sensitivity
- Unattended Capture and Printing
- Integrated Text Editor
- Integrated Log and Database
- Shell to DOS applications
- Seamless Integration with PC HF Facsimile

Call or write for our complete catalog of products. Visa & MasterCard welcome.

Software Systems Consulting

615 S. El Camino Real, San Clemente, CA 92672
Tel: (714) 498-5784 Fax: (714) 498-0568

CIRCLE 244 ON READER SERVICE CARD

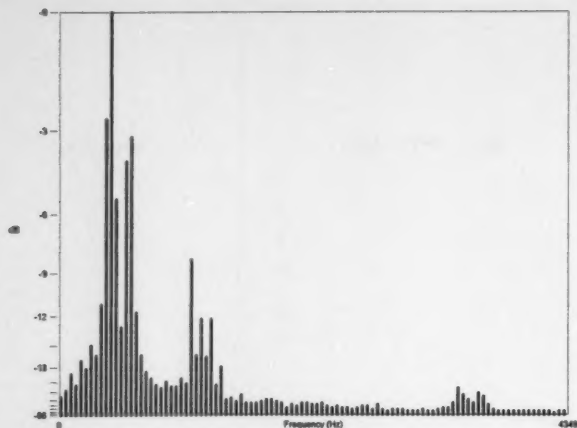


Figure 6. AMTOR signal.

Figure 4 is a signal I wish I hadn't heard. It's a 40m SSB signal, along with other stuff that was interfering with the signal. The reason why I wish I hadn't heard it is that the source was one of those jerks who argue with everybody, are mean-spirited, and use foul language that was once illegal on the air. The QSO was a real food fight amongst adult juveniles who need to be gotten off the air.

Figure 5 is from a sample .WAV

file supplied with the software. It is of a radioteletype (RTTY) signal with 200 Hz mark-space separation. Note the two-spiked appearance of the waveform, and that both spikes have their own sidelobes.

Figure 6 is the spectrum of an AMTOR signal that I recorded off the 20m band, while Figure 7 is a space telemetry signal that is among the "Spectra Plus" samples.

The "Spectra Plus Ver. 2.00" software is a useful adjunct to ham

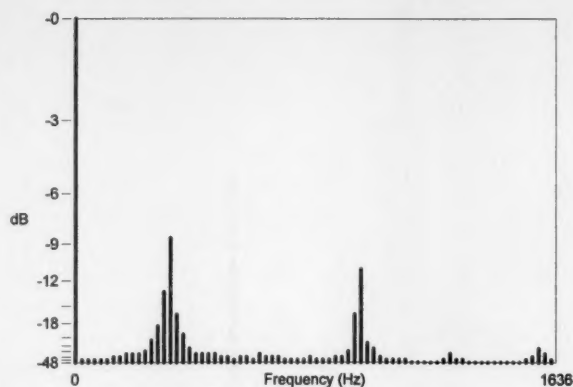


Figure 7. Space telemetry signal.

radio operations for those who have a Windows-compatible computer. It's also a useful thing for shortwave listeners to have available as it will, with a little experience, help them identify some of the non-voice, non-CW signals that are frequently heard on the air.

Low-Noise Preamplifiers

A lot of readers responded to my offer of the MAR-1 RF preamplifier kit. The MAR-1 kit is spec'd from

near-DC to 1,000 MHz, with gain of 15 to 18 dB, 50 ohm input and output impedances, and a noise factor of 5 dB. That kit sells for \$10 postpaid. I now have the same printed circuit board, plus a MAR-6 device and two chip capacitors for \$14.95. The MAR-6 is spec'd at near-DC to 2,000 MHz, gains from 11 to 20 dB (depending on frequency), and a noise figure of 2.8. Anyone wanting one of these kits can contact me at P.O. Box 1099, Falls Church VA 22041.



Serving the LORD
Since 1987

\$49.95!

THE POWER STATION

The POWER STATION is a 12V x 6.5 AmpHr gel-cell battery complete with voltmeter, wall charger and a cord for charging via automobiles. It will power most HT's at 5 Watts for 2-4 weeks (depending upon how long-winded you are). Also VHF, UHF, QRP, or HF mobiles such as the KENWOOD TS-50 (at 50W). There are no hidden costs, all you need is your mobile, HT power cord or cigarette lighter adapter.

The POWER STATION provides 12V from a cigarette plug and has two recessed terminals for hardwiring. A mini-phone jack with regulated 3V, 6V, or 9V output can be used separately for CD players, Walkmans, etc. THE POWER STATION can be charged in an automobile in only 3 hours, or in the home in 8 hours. The charger will automatically shut off when the battery is completely charged, so you can charge it even when it has only been slightly discharged, (unlike Ni-Cads that have memory). Our charging circuit uses voltage sensing circuitry, other brands are timed chargers which always charge the battery a full cycle, this damages their battery and shortens its' life if it only needs a partial charge. The POWER STATION has a voltmeter that shows the exact state of charge of the battery, not worthless idiot lights that tell you "YOUR BATTERY IS NOW DEAD." The voltmeter can even be used to measure voltages of other sources.



To order, send check or money order for \$49.95 + \$8.50 for shipping, along with your shipping address and telephone number to:

**Guaranteed
Best
Prices**

Joe Brancato
THE HAM CONTACT
P.O. Box 3624, Dept. 73
Long Beach, CA 90803.

CA Residents Add 8 1/4% Sales Tax. Alaska, Hawaii, and Candian Residents, please send U.S. Money Order & \$17.10 Shipping.

If you wish more information please send a SASE to the above Address. For COD orders, call (310) 433-5860, outside of CA Orders only call (800) 933-HAM4 and leave a message. Dealer Inquiries Invited.

CIRCLE 384 ON READER SERVICE CARD

Mini-Joystick Scanning

Shift your tuning into high gear!

by Shane P. Brady WB2WPM

Contesting has become very predominant in the WB2WPM shack in the past few years. While never going for the win, I usually try to spend at least 12 to 15 hours on a major contest. My modest station is composed of a Kenwood TS-440 interfaced with my PC.

There are two predominant programs I use during contests: KE1A's CT, and N3EQF's LOG-EQF. Both of these admirable programs now support the Kenwood radios—finally! While this allowed me to jump bands and have the programs follow along, giving me exact frequencies on my logs, I still had to manually tune the radio. Not having stacked monobanders on each band and a kW output, I had to rely on the search-and-pounce mode of operation. Trying to control a frequency with 100 watts and the ever-sought-after rare "WB2" prefix is difficult, to say the least, in most circumstances.

At the end of the contests I found myself with severe "contester's elbow." This dreaded ailment is caused by entering calls on the keyboard, then reaching up and tuning the radio for a new station. As I would reach up for the tuning knob my elbow would hit the operating table. While not a problem for

day-to-day activities, over a contest's duration this may result in hundreds upon hundreds of impacts. I have operated with an elbow pad which has helped a little.

The Joystick

What I needed was a method of tuning that would not require my hands to ever leave the keyboard. From my Commodore days I remembered a small self-stick mini-joystick designed for use with the GEOS programs. Made by Suncom, this Icontroller design is small and is made to mount directly to a keyboard. With one of these mounted on my keyboard I should be able to tune up and down without reaching for the radio.

Looking at the Kenwood manual, the mike connector has output for up-and-down tuning, and of course keying the transmitter. I located a source (Tenex Computer Express, P.O. Box 6578, South Bend IN 46660-6578; 1-800-786-6781; \$17.95 plus S&H) for the joystick and ordered one.

Having seen them before, I knew it came with a small coiled cord that would not be long enough to reach the rig; I was going to need an extension cord. The joystick comes with the same 9-pin connector used by all

those long-forgotten Atri joysticks. While waiting for my purchase to arrive I bought an original Atri joystick for 25 cents at a hamfest. If you are unable to find an old joystick to scavenge the cord and connector from, Radio Shack sells them.

The Connections

After I received the new joystick, the next step was to determine which wires went to what joystick action. I cut the old Atri control stick off and discarded it. With the remaining wire I stripped back the insulation and plugged my extension cord into the new mini-joystick. From the *Commodore Users' Guide* I located the pinouts for the connector; pin 8 is ground. Using an ohmmeter made it quick to determine the other wires needed. The joystick was going to be mounted upside down from its intended use. Keeping this in mind, on my particular cable the wire colors were as follows in relationship to joystick movement:

Ground	Black
Right	Green
Left	Brown
Up	Blue
Down	White
Fire	Orange

In the shack I use a boom mike and foot
Continued on page 67



Photo A. WB2WPM's joystick-controlled contesting station.

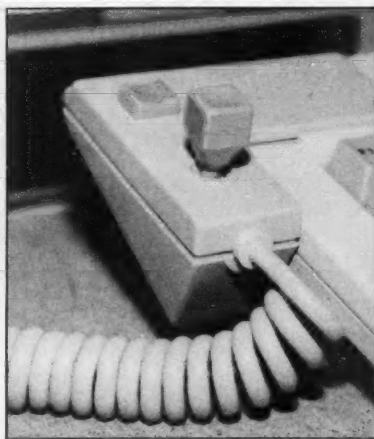


Photo B. Close-up of the joystick, mounted to the keyboard.

HAMS WITH CLASS

Carole Perry WB2MGP
Media Mentors, Inc.
P.O. Box 131646
Staten Island NY 10313-0006

Instructor's Workshop

Sadly, this was the first time in eight years that I was forced to miss going to the Dayton Hamvention. Two weeks prior to the weekend that I look forward to all year, I found out that I had to undergo back surgery to alleviate the excruciating pain of a herniated disc and a sciatic nerve problem. After months of preparation for the two forums that I do at Dayton each year, I was devastated. Of course, it's at times like this that you learn how wonderful it is to be able to rely on good friends to come to the rescue.

Bill Pasternak WA6ITF is an editor of *Westlink Report*, and has been a dear friend of mine for many years. He immediately sprang into action, along with forums director Ron Moorefield W8ILC, to take care of my forums and to make me feel as though I were still participating in the weekend. No small task, but they pulled it off!

The very talented Bob Grove WA4PYQ, publisher of *Monitoring Times*, agreed to co-moderate the Instructor's Workshop with Bill. With

these two very capable men running the forum and with the excellent speakers I had lined up, I knew it had to be a big success.

Bill had dispatched Henry Feinberg K2SSQ from AT&T to my home a few days before my surgery in order to videotape my introduction to my forums. On Friday, April 29, the Instructor's Workshop opened with a taped greeting from me. Since the entire event was being videotaped to send to me by Joe Eisenberg WA0WRI, I can't tell you what a thrill it was for me to watch this later at home. This forum is an important one to me because the audience consists of very special people. These are the folks who are using amateur radio in the classroom, teaching radio license courses, or who come to hear new ideas for recruiting people. It's the group that helps to keep amateur radio growing.

Bob Grove spoke first. He announced that he'd be publishing a new magazine called *Satellite Times*. It will include all aspects of satellite information, including amateur radio, weather, TV communications, and lots more. Bob spoke about using shortwave in the classroom. This eloquent speaker had been a high school science teacher for 16 years and is well aware of the advantages of bringing scanners and other radios into the classroom. He pointed out that many hams first got exposed to radio by listening to radio demonstrations in school. He explained the differences between broadcast and utilities and defined how they can both enhance and enrich classroom activities.

In foreign language studies, students can hear the actual language being spoken. A social studies lesson can come to life as the class listens to cultural programs on the radio which project an image of a specific country to the rest of the world. These programs describe the history, government, present state, arts, music and news from various countries in the world. Bob described how interesting it can be to listen to programs like the BBC which announces news as it is breaking. He referred to Radio Moscow and made note that propaganda can be fascinating to listen to in a classroom setting.

Using VHF/UHF scanners with kids helps them learn about what is going on around them. Listening to police calls, ambulance runs, and emergency teams of all kinds rendering medical assistance to victims can provide tremendous insight to students. Imagine the lessons that could have been taught with the use of a radio in a classroom during the L.A. earthquakes and the clean-up and rescues that followed.

Bob ended his excellent presenta-

tion by projecting that we're at a crossroads in communications and about to take an enormous leap skyward in the next few decades. A whole new world of satellite communications is about to open. Just think of the possibilities in a classroom!

My co-net control on the CQ All Schools Net, Gordon West WB6NOA, was next up to speak. Gordon's Radio School has been producing license materials and study guides for many years. Gordon is a good example of how an enthusiastic instructor is the key to the success of a radio program in a school setting. He stressed the importance of handing out lots of "stuff" for the kids to touch and look at. Having the class identify a bag filled with various electronics components is a good idea.

Gordon ended with his famous "glowing pickle" demonstration. Even though he cautioned that safety is always the first consideration, I could see on the videotape that the entire first row cleared out as he plugged in to 110V to start the current going through the soon-to-be-exploding pickle. Be sure to join Gordon and the rest of our nationwide school net this fall for more good ideas to use in the classroom. We'll start out on 28.303 MHz at 12:30 EST on Tuesdays and Thursdays. If nothing is heard, we'll QSY to 21.303 MHz.

My other net control on the school net is Jim Wilmerding N4MDC who discussed SAREX in the classroom. Jim gets a special thank you from me for converting the tapes of both my forums to VHS format. His presentation

was superb, as usual. As a school administrator himself, he addressed the popular topic of how to talk to administrators when you want to get a school radio program started. He wisely stressed the importance of going in prepared, making an exciting presentation, and telling the principal what the children and the school will gain from the radio class.

As hams and as educators we all know the value of ham radio in the classroom, but be sure that the school administrator knows how it will enhance the existing school curricula. He also described his experience with the SAREX program at his school. Jim emphasized the importance of being flexible and having patience when you get involved with making space shuttle contacts. Of course, those of us who have done it all agree it's worth the effort. Jim will be assuming a new administrative position in Rockland, Maine, this fall. You'll be hearing more about him and his good works with radio and education in my columns.

Vicki Gigante KA3PVS is in charge of shuttle retransmissions at the Goddard Space Flight Center. Vicki made the point that today we only see the shuttle on TV when there's a problem or perhaps when there is a spacewalk taking place. She goes into schools to give kids the opportunity of sharing in the excitement of the space program via amateur radio. The amateur radio club at Goddard gives out scanners to schools so they can put it on the PA system for a launch or landing.

She accomplishes two things by



Photo A. Bob Grove WA4PYQ, co-moderator of the Instructor's Forum.

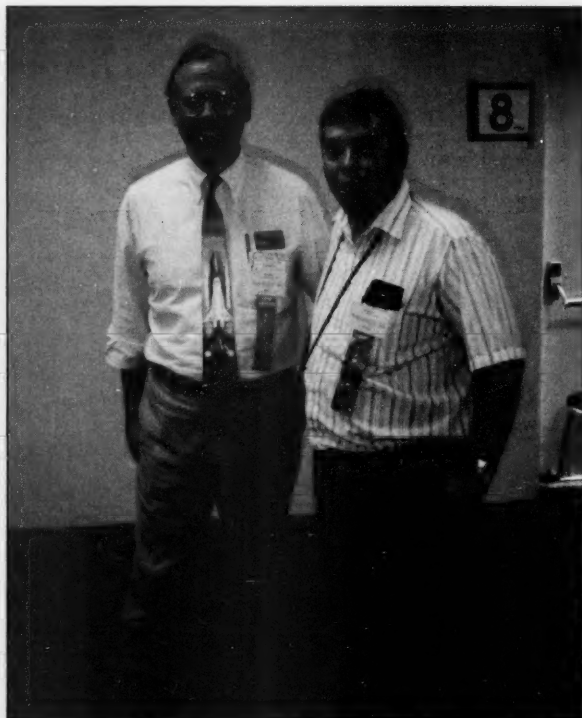


Photo B. Jim Wilmerding N4MDC (left) and Bill Pasternak WA6ITF (right).

going into different schools. First, she gets to demonstrate amateur radio to the children. Astronaut Ron Parise WA4SIR is a member of the Goddard ARC. He sometimes joins Vicki in the demo part of her visit and speaks with the students on the radio. Second, she is exposing kids to some of the more fascinating aspects of space travel and communications. The frequencies for retransmission are 3860 kHz, 7185, 14295, 21395, 28650 and on 2 meters 147.45 in the local area.

Bill WA6ITF described how he conceived of the idea of the Young Ham of The Year Award in 1986 for children under the age of 18. Burt Hicks, publisher of the *Westlink Report*, and Chip Margelli from Yaesu both support the effort and co-sponsor the award every year. Bill stressed that the qualifications they're looking for have nothing to do with how young a child is when he or she got licensed. They're interested in children who use amateur radio to make a contribution to the hobby, to the community, or to their school.

In 1990, the young lady who won the award was Mary Alestra KB2IGG, a 12-year-old from my ham radio program. Mary is everything we'd like a ham radio operator to be. I was so excited when she won the award! At Dayton, Bill showed the video of Mary accepting the award four years ago, highlighting her incredible speech. Be sure to nominate a deserving young-

ster, if you know one, for 1995.

Bill then introduced Cathy Gilliland KB0FDU, age 16, who is the narrator of a new video, "This Is Amateur Radio," being produced for young teens. Cathy takes you on an on-screen guide to amateur radio, as seen through the eyes of a teen-ager. Bill hopes to distribute the video to public schools across the country.

Cynthia Wall KB7ITT was the last speaker at the forum. She is the author of a series of adventure books seen through the eyes of youngsters. The Great Northwest is featured in her books, along with amateur radio. These books make a wonderful addition to any classroom, or to any child's collection.

Cynthia is very concerned about making children aware of safety in the wilderness. She goes into schools and talks about the difference that possession of a radio would make during disasters such as the Mt. Hood incident. The books are all problem-solving books which teach kids how to think for themselves. The heroes solve their own problems. We can look forward to a new book coming out in August about the great whales.

I'll always be grateful to Bill and Bob for doing such a professional job with the Instructor's forum. Anyone who missed it this year really missed some exceptional presentations. I hope we can all meet there next year at Dayton.

Mini-Joystick Scanning

Continued from page 65

switch. On the Kenwood mike connector I only had the audio going into the connector. This left lots of room to route my new cable into the connector. I wanted to be able to disconnect the joystick from the radio without disconnecting my boom mike, so I wired a 5-pin DIN plug right at the connector.

There were only three functions I needed to connect up to the radio: scan up, scan down, and the PTT. (After all, why let that "fire" button on the joystick go to waste?) In wiring the connector, I decided that the up and right (blue and green) would be the joystick motion for scanning up. These both went to pin 4 of the mike connector. The down and left action (white and brown) would control the scan down function; these were soldered to pin 3 of the mike connector. The last two connections were the ground (black) going to pin 8, and the fire/PTT being connected to pin 2.

After double-checking all wiring with an ohmmeter to as-

sure myself I had the proper orientation of joystick movement, it was time to test it out. As you can see from Photo B, I have actually mounted the joystick upside down on the upper-left side of the keyboard. There is just enough room on my board to position the joystick with its self-stick backing.


Results

Everything worked out better than expected. On the TS-440 the scan rate is a bit on the slow side, just right for contesting! I have found that I have good control over tuning with just a little pressure from my little finger on the stick. And, if I'm so inclined to, I can use the fire button to key up the transmitter.

The last contest went off flawlessly, and I didn't succumb to the dreaded contester's elbow. This has worked out so well, I might pick up some more of these joysticks, just to have on hand for projects down the road. After all, it is a strain to reach up for that rotor control . . . !

"DESIGNING A YAGI HAS NEVER BEEN SO EASY!"

... 73 Amateur Radio Today, April '94

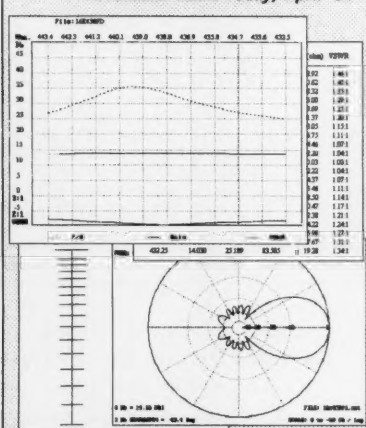

This high speed, easy-to-use yagi software features auto-design, auto-optimize and performance analysis. It will accurately calculate up to 17 elements to 1 GHz, with boom and tapered element compensations, a folded dipole option, and prints all files, charts and graphs. Includes both co-processor & no co-processor versions.

For PC - AT w/ 840 K RAM, VGA, CGA, HWC and DOS 3 or greater

HOT! NEW VERSION

Quickyagi v3.0 only \$39.95* + S&H

Add \$3.00 s/h or \$5.00 for non-USA orders • Incl. Callsign worder
Send SASE for complete info. • US Check or International Money order
Arizona orders add 5.5% state tax • Specify 3.5" or 5.25" floppy disk

RAI Enterprises (802) 848-9755
4508 N. 48th Dr. Phoenix, AZ 85031

QUANTUM® CONFIDENCE EXPERIENCE IT!

Thousands of hams have experienced "QUANTUM CONFIDENCE" by using the Quantum Ham Battery. Get the confidence of dependable power...



ready when you need it for emergencies, events, field day, boating, cellular phones and more.

MADE IN THE USA

Dealer
Inquiries Invited

Compare Quantum's unique features to your present battery packs.

- 12 VOLT, 2.1 AH CAPACITY — Up to 6 times the capacity of standard battery packs and maximum output from your HT.
- STATUS LIGHTS — To monitor battery capacity.
- SEALED LEAD CELLS — Maintain charge for months and can be recharged to 100% capacity without the memory effect of nicads.
- ADAPTERS — To fit most HT's, cellular phones & other types of electronic equipment.
- DUAL OUTPUTS — To power two units simultaneously.
- FACTORY REPLACEABLE BATTERY CELLS AND COMPONENTS.

Call 1-800-989-0505 for information or your nearest dealer (9-5 EST)
or Fax 516-222-0569 • **QUANTUM INSTRUMENTS INC.**
1075 Stewart Avenue, Garden City, NY 11530 • 516-222-0611



CIRCLE 26 ON READER SERVICE CARD

PACKET & COMPUTERS

Number 17 on your Feedback card

Digital Amateur Radio

Jeffrey Sloman N1EWO
c/o 73 Magazine
70 Route 202 North
Peterborough NH 03458

SMTP—The Right Way to do Mail

For the past several months this column has focused on TCP/IP in general and JNOS in particular. For those just tuning in, TCP/IP means Transport Control Protocol/Internet Protocol. That mouthful is a suite of applications that handle communications for the Internet—you know, the "Information Superhighway." [As an aside, there is no such thing as the "Information Superhighway." The term is a political invention, and it makes me slightly ill just to hear people talk about it. It's more like a few interstates, some county roads, and a whole lot of side streets and driveways. This is not to imply that the Internet is without value; it is very valuable. The idea of the Information Superhighway is just political nonsense—the reality is much more complex. Well, enough editorial, let's get back to the real world.]

The Internet was developed by ARPA (Advanced Projects Research Agency—now DARPA, with the D for defense), in cooperation with academe and industry, as a way to promote cooperation in research and on government projects. The Internet project was not just the construction of the physical network to carry the signals, but also the development of the TCP/IP protocol suite. To simplify what is going on there: The TCP portion takes care of moving the data around; the IP portion takes care of packaging the data so it is useful and understood.

SMTP (Simple Mail Transfer Protocol) is the way the electronic mail is sent in the IP world. It is really a simple protocol; in fact, it uses English to send commands back and forth. You can actually send mail as if you were an SMTP server by using telnet (the IP remote login program) to connect to port 25 (IP services are associated with ports, also called sockets; each port provides a different service), and issue a few commands:

```
:telnet host.com 25
Trying...
Connected to host.com.
```

```
Escape character is '^['.
220 host.com — Server ESMTP
(PMD5 V4.3-7 #6563)
help
214- Available
214-
214- DATA, EHLO, EXPN, HE-
LO, HELP, MAIL FROM
214- NOOP, QUIT, RCPT TO,
RSET, SAML FROM
214- SEND FROM, SOML FROM,
TICK, VERB, VRFY
214- XADR, XSTA
214-
```

You can see here that I connected to a host and issued the "help" command. Notice the numbers that precede each line: The text is for humans, and the numbers (220, 214) let automated SMTP servers understand the messages with ambiguity.

OK, so why is SMTP so good? Let's take a look at how it works if you let your system do the work. First, how does "normal" packet mail work? I want to send a message to my friend Mike AA9FP, so I take these steps:

1. I connect to my local PBBS. Depending upon your QTH, this may be easier said than done. As we have discussed before, the LANs (Local Area Networks) in the packet world are generally (mostly) completely unmanaged. Hidden transmitters are everywhere, causing interference and often making staying connected a hit or miss proposition.

I should also point out that my beautiful new 486 machine is now doing the work of a dumb terminal, and probably talking to one of the 386SX machines so often seen as PBBSs. Something is wrong when your \$3,500 hot rod is doing the work of a wheelbarrow.

2. While fervently hoping that I will not be disconnected, or make a typo, or get a phone call, or (you get the idea), I type my message. Generally the text reflects my anxiety about the situation (i.e.: it ain't no masterpiece.)

3. I go have a cold drink, and hope that I never have a desire to talk to Mike again.

OK, OK, so I am being dramatic. The point is, the current system causes a huge quantity of unnecessary traffic. It wastes the power of the local comput-

ers—even if they are just XTs or 286s, and it is not much fun.

With SMTP the digital ham radio hobby is much more relaxing. Here's how that same message gets sent:

1. I login (locally on my own machine) to my own mailbox.

JNOS (the TCP/IP program we have talked about in this column) provides a full-fledged PBBS which can be used as a personal mailbox or a full-blown PBBS with mail forwarding of the traditional kind. The login process is easy:

```
Trying 127.0.0.1:telnet...
Telnet session 1 connected to
Local BBS
JNOS (n1ewo-9)
Welcome to N1EWO [44.48.70.22]
login: n1ewo
Password:
[JNOS-1.10c-IHM$]
You have 1 message - 0 new.
Area: n1ewo Current msg# 1.
?A,B,C,CONV,D,E,F,H,I,JH,IP,J,K,L,
M,N,NR,O,P,PI,R,S,T,U,V,W,X,Z >
```

2. The steps from here are very much like being connected to a "normal" PBBS, just much more relaxing.

One thing that I notice right away is how quickly the machine reacts (I am connected to my own machine and not over the air). I also cannot be dumped because of interfering stations. Another difference is addressing. Instead of the normal sort of AA9FP@WJ9U.CIN.IN, I type:

```
Area: n1ewo >
sp Mike
Subject:
Hello!
Enter message. End with /EX or ^Z in
first column (^A aborts):
```

Notice that I called him "Mike." This is because I have a file of aliases that allow me to use names that I understand and remember easily—just a nice convenience. The real difference, though, comes when I finish.

The delivery of SMTP mail is the revolutionary aspect. With the current system, mail is collected by a centralized PBBS then delivered as packages to various distribution points. It finds its way through the system to the destination PBBS and waits for the recipient to connect and check it. (It has become more common for individuals to run similar packages and get their mail directly.)

With SMTP, delivery can go one of two ways. If the recipient is local, the SMTP server (on your machine) will connect directly to the SMTP server on his

machine and make the transfer—no third parties involved. It will do this in the background while you do other things, and will keep trying 'til you stop it. It is fun to send your first SMTP mail message and watch the process.

The second possibility is that an SMTP gateway would be used. If the recipient is too far from you to talk directly, a machine locally can be used as a gateway, and the mail will be routed to the destination. This can occur in a batch like the current system or one at a time. A gateway today would very likely resort to the current packet network for the hop in between, and an SMTP gateway on the other end would do the delivery.

Notice that there is no requirement for the recipient to connect anywhere but his own mailbox. This system has a flaw, though. It requires that the recipient's machine be available at all times, ready to receive mail. Not all of us can do that.

POP Goes the Email

The answer to this problem is POP (Post Office Protocol). With POP there is a server in a local area which receives mail for a particular ham—like a PBBS does today. But, instead of connecting to the PBBS and reading the messages, POP is a background batch process. When I start up my station, it checks the POP server for mail and transfers any it finds. All automatically—pretty neat.

OK, fine, but how do I do this? Well, the first step is to get a copy of NOS (Network Operating System) or a variant. We have been using JNOS—my favorite. It is written by Johann (WG7J) and has reached its final "official" release version 1.10c. Johann is working on a Windows version which should be spectacular. You can get the latest version on the Internet by anonymous FTP to:

```
ftp.ece.orst.edu
in the directory:
/pub/ham/wg7j
the file is:
110cxxx.zip
```

It should also be available on many ham-radio-related BBSSs. You may find earlier versions—these will get you started, but 1.10c has several new features worth having. You may also see releases with later numbers. These are the result of the large following of JNOS users who continue to improve the source code and add features (and bugs, sometimes).

Reprints of this column's discussion of running JNOS are available—call the magazine. We'll discuss more about JNOS in future months. 73 de N1EWO.

73



FOR HAMS ONLY

ROBB KESEE
JERRY K3FKI
DAVE KA3ZNY

4309 Northern Pike Blvd. Monroeville, PA 15146
(412)374-9744

FOR ORDERS ONLY CALL (800)854-0815

Specializing in Preowned
Amateur and Shortwave Equipment
Buy • Sell • Repair • Love To Trade
We Carry All Major Brands of New Equipment
We Now Custom Design & Build Computers

For Hams by Hams
All of The Latest Hardware & Software
Call For Details

CIRCLE 329 ON READER SERVICE CARD

Do you use a

JURASSIC REPEATER

then fast forward to 1994

- Add A Digital Voice Messaging System To Your Repeater
- Leave Voice Messages For Each Other
- Get Packet Cluster Info In Voice
- Schedule Voice Announcements
- Computer Board And Software \$259

Call Toll Free For Info Package

1-800-563-5351
1-306-781-4451
1-306-781-2008

Toll Free From USA
Direct
Fax


DIGITAL Communications Inc.,
P.O. Box 293, White City, SK, Canada S0G 5B0

CIRCLE 181 ON READER SERVICE CARD

Actual Circuit Emulation

A better way than ICE!


- More power with much less cost
- Drivers for LCD,DTMF,more
- External power supply for 24 hour a day operation
- Runs independently of PC
- Versatile Interface Adapter on eBoard, simple expansion
- Board resident Forth option
- Use as programmable PCcard
- All source is included. Kernal, Forth, PC Debugger and Assembler
- Cable, Breadboard, Power supply



\$195⁹⁵

This is a limited time price for the 6502, 6522 version. Includes shipping and handling.

Highlands Electronics
13720 LakeShore Drive
ClearLake, CA 95423
Phone 707 994-1024
Fax 707 994-5823



Object Oriented Hardware™

CIRCLE 43 ON READER SERVICE CARD

Radio Direction Finding

Joe Moell, P.E., KØOV
P.O. Box 2508
Fullerton CA 92633

Testing the Ramsey SlyFox

I love building electronic gear. Long ago, I lost count of the number of kits I have put together. It's too bad that today's new hams cannot learn electronics by equipping their stations and test benches with ambitious kits by Heath, Eico, and Realistic. Most of today's kits seem to be the "jingling bag of parts" variety, consisting of just a small circuit board and components, without enclosure.

Simple kits are still a good, inexpensive way to learn about electronics and construction techniques. If you need an unusual product that doesn't have enough mass appeal to justify an offshore production line, a kit may provide the most economical way to buy it.

Ramsey Electronics (793 Canning Parkway, Victor NY 14564) provides many such "niche market" items. Last year, the company began touting a series of kits for fans of VHF radio direction finding (RDF). The long-promised Ramsey SlyFox 2 meter transmitter is now available to RDF contesters. (We call ourselves foxhunters or T-hunters, hence the name.)

It's Unique

The SlyFox (Model FHT-1, \$129.95) is a complete 2 meter transmitter with a built-in microprocessor-based timer

and CW identifier. Hook it to a DC power source and antenna, select the mode and timing, and it's ready to serve as a target for your club's next hidden transmitter hunt. An optional voice memory module (Model FHID-1, \$29.95) is also available.

I have spent the last several weeks evaluating the SlyFox. I constructed a kit and got it working. I also tested a SlyFox that was built and tuned up at the factory. The manual for both was revision 1.2, dated October 1993.

"Homing In" has previously described and reviewed a number of timer/ID "foxboxes" that connect to your existing VHF-FM transmitter or transceiver to make it into a hidden T. Ramsey is the first and only company to offer a complete one-box transmitter-IDer kit. The idea is good, because most handhelds and mobile rigs are not intended for the continuous-duty full-power transmitting mode demanded by long-distance T-hunts.

On the other hand, the FHT-1 does not have a frequency synthesizer. Changing the hunt frequency means replacing a soldered-in crystal. There is no provision for bringing out audio and push-to-talk control to drive an external transmitter, say, for a hunt on the 50 or 222 MHz bands.

The SlyFox comes with a crystal for 146.52 MHz. That frequency is not commonly used for T-hunting anywhere, to my knowledge. Putting a three-hour T-hunt on the national simplex frequency would not be met favor-

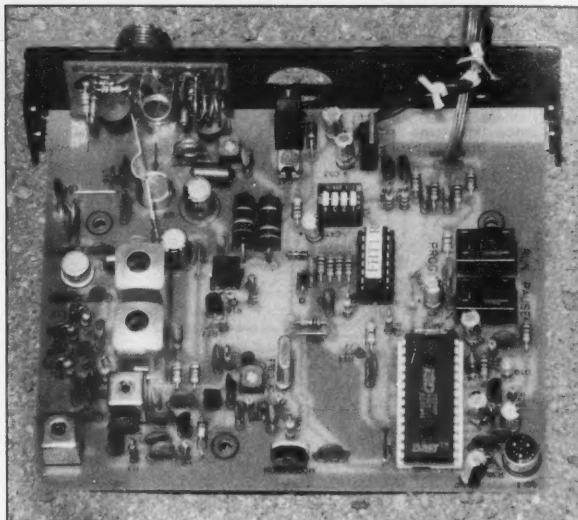


Photo A. The completed Ramsey FHT-1 SlyFox transmitter boards include the enclosure's end plate, which is mounted to the coax connector during assembly. Components for the optional FHID-1 voice ID kit are in the lower right corner of the main board. The three-conductor ribbon cable at upper right connects to paddles to program the CW IDer.

ably in most cities. A better choice would have been 146.565 or 146.43 MHz. Several areas of the USA use one or the other of these channels for T-hunts.

The crystal is a common parallel-resonant type for nine-times multiplication. Ramsey provides a complete description of its requirements. I ordered a rock for 146.565 MHz from a local supplier and it works fine.

The SlyFox has the same RF circuit as the Ramsey FT-146 2 meter transmitter. The crystal oscillator drives two tripler stages, a driver, and the final. The manual promises 5 to 6 watts RF output with a 13 to 14 volt DC supply, and at least 4 watts at 12.0 volts.

Ramsey's technician told me to expect 5.5 watts at 13.8 volts and over 4.5 watts at 12.0 volts from the factory-wired unit. But in my tests with two well-calibrated Bird Electronic Corporation Model 4431 wattmeters and a UHF dummy load, the most I measured was 4.6 watts at 13.8 volts and 3.45 watts at 12.0 volts. In the low-power mode, output was 920 milliwatts at 13.8 volts.

Not for Beginners

A VHF transmitter is not the best choice for one's first kit-building experience. Ramsey recognizes this, and states in the manual, "To be honest, we'd like to see first-time builders start out with an easier kit . . . but we are confident that you can construct the FHT-1 successfully if you follow this manual carefully and patiently."

Legend has it that in its heyday the Heath company hired men and women "off the street" to test-build Heathkits before they were released. If a non-technical person couldn't make the product work, it wasn't ready to sell. Such testing is not economically

feasible today, so it is not surprising to see minor discrepancies in kit manuals. SlyFox had a few. For example, DIP switch positions in the mode tables are reversed from the switch configuration and the paddle dot-dash terminals are reversed in the pictorial. Soldering the center conductor of the coax connector is not called out until this terminal is in a corner and surrounded by other parts, making the task awkward.

But all in all, the assembly instructions are good. Many steps include information on the function of the part being installed, to help you understand how the unit works. Color code and other part identification data is given in every step.

Most parts fit on the 4-1/2" x 5-1/2" main circuit board (Photo A). There is tin-plated etch on one side, and the other side is clearly marked with component designators to aid assembly. The main board also has etch and markings for the optional voice unit parts.

The voice ID area of the board is shaded out in the Parts Finder drawing that you use to assemble the basic FHT-1, resulting in a couple of errors. One jumper needed in the basic FHT-1 is covered up in the drawing. On the other hand, the pictorial shows resistor R11, which is not used unless you add the FHID-1. This could confuse some builders.

A separate 1" x 1-3/4" circuit board holds the SO-239 output connector and a two-section output low-pass filter. Parts on the filter board mount to the etch side, surface-mount style. This board "stands up" at the edge of the main board, held in place with one capacitor lead and two small wires (Photo B). Once constructed, the two-board assembly is very tricky to re-

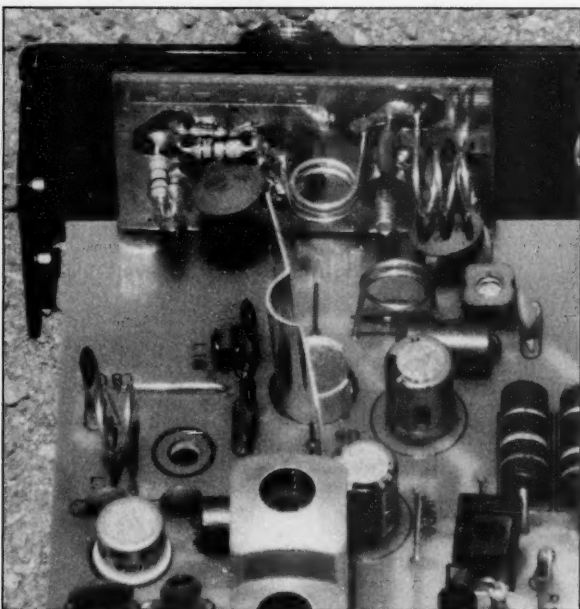


Photo B. The LPF-02 low-pass filter board attaches to the main board with a capacitor lead and two ground wires. L4 is in the center of the board and L3 is to the right.

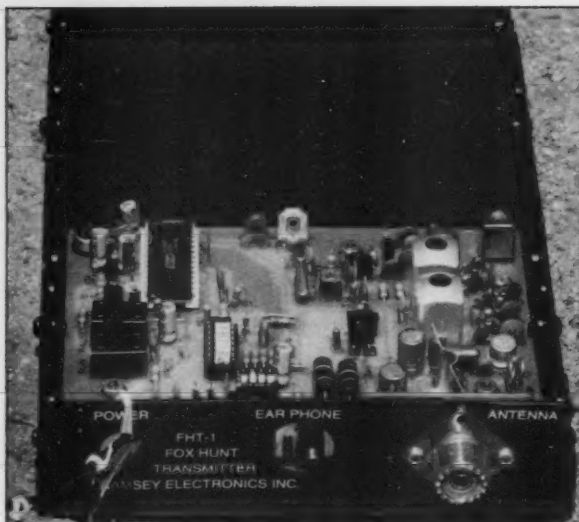


Photo C. The CFHT steel case is rugged enough to protect the SlyFox from abuse in the field. There is plenty of room for a set of C-size batteries.

move for servicing and troubleshooting, because there is no sturdy mechanical attachment of the boards. You can't solder them directly together because the filter board sits on the non-etch side of the main board.

If you plan to provide your own enclosure for the rig, I suggest you have the boards handy when you pick out or

fabricate your box so you can be sure to arrange the proper fit. You cannot complete the filter board assembly first because the end plate of your case must be bolted to the coax connector and filter board before soldering the connector center pin.

Ramsey sells a matching enclosure, Model CFHT, for \$29.95 (Photo

C). Top and bottom are made of steel for ruggedness. It holds the filter board and connector perfectly in place. At 6" x 9-3/4" x 1-1/2", it is almost twice as large as it needs to be. There is room for batteries or another circuit board.

The inductance of air-core coils in VHF circuits is a function of the diameter and spacing of the turns. Ramsey engineers have a clever method for helping you make the four air-core coils properly. You are instructed to wind them on the threads of a 5/16 x 20 bolt, then "unscrew" them to get perfect 5/16" diameter and 1/20" spacing.

Other VHF transmitter kits I have built use a myriad of tiny variable capacitors for tune-up, but this rig has only one to resonate the final tank and one to tweak the crystal oscillator to the exact channel frequency.

Tuning Trials and Tribulations

Any home-built transmitter, whether from scratch or a kit, must be tuned up properly. Spurious and harmonic emissions must be within FCC's stringent limits at high and low power level into any antenna. Final transistor power dissipation must be kept low for long life.

Ramsey realizes that most hams don't own a spectrum analyzer and many have not yet acquired a VHF wattmeter and a good dummy load. So, the instruction manual suggests several flashlight bulbs that can be

used to load the SlyFox and indicate power output. Except for some brief experimentation, I used a wattmeter and a UHF load, and I'm glad I did, as you will see.

The first step in tuneup of the SlyFox kit is to verify the output of the first tripler stage using the supplied non-metallic hexagonal tuning tool. Hey, where's the tool? It's the only missing part in this kit. No problem—I have built enough Heathkits to have lots of them on hand.

Despite careful tuning of the triplers' RF coils, I got zero volts at the first tripler test point. Probing with a DC voltmeter, I found very low voltage on the emitter of the oscillator stage. C23, the coupling capacitor between oscillator and tripler, was shorted.

Unfortunately, the manual doesn't provide any troubleshooting help for this condition. There are no voltage or resistance charts, either. A skilled RF experimenter would have no trouble tracking this defective part, but the task would have been quite difficult for a beginner.

After finding and installing a replacement for the defective C23, I followed the instructions and tuned the tripler, driver, and final stages for maximum output. However, the tripler test point voltages were well below the minimum expected values in the manual. The most output power I could get with careful tweaking was only 2.7 watts. I checked the rig's output on a

Number 19 on your Feedback card

HAM HELP

We are happy to provide Ham Help listings free on a space available basis. To make our job easier and to ensure that your listing is correct, please type or print your request clearly, double spaced, on a full (8 1/2" x 11") sheet of paper. You may also upload a listing as E-mail to Sysop to the 73 BBS /Special Events Message Area #11. (2400 baud, 8 data bits, no parity, 1 stop bit. (603) 924-9343). Please indicate if it is for publication. Use upper- and lower-case letters where appropriate. Also, print numbers carefully—a 1, for example, can be misread as the letters l or i, or even the number 7. Specifically mention that your message is for the Ham Help Column. Please remember to acknowledge responses to your requests. Thank you for your cooperation.

I am in desperate need of a Digital Display Board X-54-15-4000 for a KENWOOD TS-830.S. You can call me collect at (718) 919-6072 after 6 PM EST; or write to me, Juan Mosoller, PAPA INDIA INT'L, P.O. Box 210-417, Brooklyn NY 11221-007.

I need to get in touch with a technician who is familiar with a ROBOT 800-C Terminal Unit and who would be willing and able to identify and correct a problem within the unit. Also, does anyone know whether the Robot Manufacturing Co. is still in business? I need their address. I would appreciate any and all assistance. Herman H. Franks WD4IFN/TU4EV, AmEmbassy Abidjan (FMC), Dept. of State, Washington DC 20521-2010.

WANTED: Software-hardware info for HEATHKIT H-101-20. Computer ham programs are my main interest. Jerry Weihrauch KOHZI, 475 E. Minnehaha #3, St. Paul MN 55101.

A NO-RADIAL VERTICAL THAT COVERS 80 OR 75 METERS?

THERE'S ONE NOW!

No, we won't insult your intelligence by telling you that it's a "halfwave" or that ANY vertical will operate more efficiently without a good radial system than with one; it certainly won't! If you want expensive fairy tales talk to our competitors! If, however, you've no room for even the smallest radial system just install the most efficient multiband vertical in the business, the HF9V-X, over our counterpoise kit. You'll not only save a tidy sum but you'll work DX that the shorter and more lossy no-radial "halfwaves" can't touch because both the HF6V-X and HF9V-X use longer active element lengths for higher radiation resistance and greater efficiency on more bands than any of the so-called halfwaves. Ask for our free brochure for complete specs on all Butternut models and receive technical note DLS-1 "Dirty Little Secrets from the Antenna Designer's Notebook" that shows you how to calculate the probable efficiency of any vertical antenna using the manufacturer's own specs so you won't have to learn the truth the hard way!

NEW!

Model HF9V-X (shown to the left) for 80/75, 40, 30, 20, 17, 15, 12, 10 and 6 meters.

NEW!

Model CPX counterpoise kit for Butternut models HF9V-X, HF6V, and HF6V-X; substitutes for ground or elevated radials. Self-supporting tubing bolts onto base of antenna. Mast not provided.



BUTTERNUT ELECTRONICS CO.

P.O. Box 1234, Olmito, TX 78575 (210) 350-5711

I noticed that the factory-wired

My experience clearly proves the need to use good RF test equipment for tuning up this kit. It may be OK to do your initial "smoke checks" with a flashlight bulb load, but I urge you not to put on any T-hunts with this rig until you verify the output power and final stage tuning with a good wattmeter and 50-ohm VHF load. A spectrum an-


An incandescent lamp is not an adequate indicator of power output and signal purity at VHF. If I had trusted only a bulb in my initial tests and not checked further, my SlyFox would still be putting out half power and excessive harmonics. Furthermore, the output capacitor's set point for a 50-ohm load is not the same as for an inductive incandescent bulb. So make friends with a ham who owns a VHF wattmeter. Perhaps your local ham club has one to loan out.

The internal keyer's clock starts when you send the first dit or dah and continues at a fixed rate until the memory is full. Don't hesitate when sending, or the memory will fill up with spaces. You cannot change the rate of programming or playback of the ID, which is about 13 WPM. The 68HC705 microcontroller automatically sends "DE" before the callsign when playing back the CW ID.

When you add the voice ID option, the CW IDer is disabled, and you won't need the paddles. The voice message lasts 20 seconds, but it is truncated to 10 seconds if you do not select the 60-seconds-on mode. **73**

- Packet Radio -


Portable & Affordable!



Model BP-1
Packet Modem
Made in U.S.A.

- ★ Simple Installation
- ★ No External Power
- ★ Smart Dog™ Timer
- ★ Perfect For Portable
- ★ Assembled & Tested
- ★ VHF, UHF, HF (10M)



Whether you're an experienced packeteer or a newcomer wanting to explore packet for the first time, this is what you've been waiting for! Thanks to a breakthrough in digital signal processing, we have developed a tiny, full-featured, packet modem at an unprecedented low price. The BayPac Model BP-1 transforms your PC-compatible computer into a powerful Packet TNC, capable of supporting sophisticated features like digipeating, file transfers, and remote terminal access. **NOW** is the time for YOU to join the **PACKET REVOLUTION!**



400 Daily Lane
P.O. Box 5210
Grants Pass, OR
97527

Just...
\$49.95
+Shipping

1-800-8BAYPAC

 1-800-822-9722
(503) 474-6700 

CIRCLE 269 ON READER SERVICE CARD

ABOVE & BEYOND

Number 20 on your Feedback card

VHF and Above Operation

C. L. Houghton WB6IGP
San Diego Microwave Group
6345 Badger Lake Ave.
San Diego CA 92119

10 GHz Operation & Loran: A Poor Man's Grid Square Location System

This month will be a very busy one with both the first weekend of the ARRL 10 GHz contest and the ARRL convention taking place in San Diego. Both events should produce a flurry of activity, consuming lots of time, setting up for either event. I am looking forward to the convention because of all the activities and eyeball QSOs. In addition to getting ready for the convention, we are trying to give our microwave equipment a good shake-down test starting in early May to ensure proper contest-time operation. New items that have been added are given a real stress test for field operations to make sure they won't fail in portable operations.

It seems that most of the time I do not give my equipment the time needed to put it into top shape due to the many different constraints put upon the time I have available for hobby activities. I don't want to put a strain on family activities and the hobby must remain as just that, a hobby. I recommend starting much earlier on equipment checks, leaving lots of time for family activities. I've just got to start earlier next year (as I always say).

This month I will put into practice some of the methods and practices that our San Diego Microwave Group uses to facilitate microwave contacts. Some of the devices we bring into play are very simple and inexpensive, while other items can be a little more complex and costly. In this light I would like to start with a few simple devices that

can be put into operation for little cost; then I will cover a surplus Loran receiver system that is used for position control.

10 GHz Contest Preparations

A little background information on our systems might be in order first. In our operations, both high power (10 watts) and low power systems (50 to 100 mW) are used for SSB operations and both produce very good results. While the low power systems are not as "loud" as the high power systems, they are quite readable and log just as many contacts as high power systems. First Rule: High power is nice, but not necessary if conditions are reasonable. First choice: Don't go for power, but improve your receiver noise figure.

MMICs for Receiver Preamps

A good investment in your SSB system would be to make performance improvements in the receiver system, particularly the preamplifier gain and noise figure. If your system operates in the 10 dB or so noise figure range, a tremendous improvement can be made with lower noise figures. If you lower your noise figure from 10 dB to something near 3 dB you will be surprised at the overall performance improvements. It's like having the transmitter at the other end of the path double or quadruple its power output.

What kind of amplifier should I build to attain a low noise figure? Well, there are many devices that are suitable, all of them having GaAsFET-type construction. The basic types are HEMPT-type FETs, which require a stripline design for proper operation at the design frequency of interest. The stripline PC board must be designed to match the device to the specific frequency of interest. Another type to use

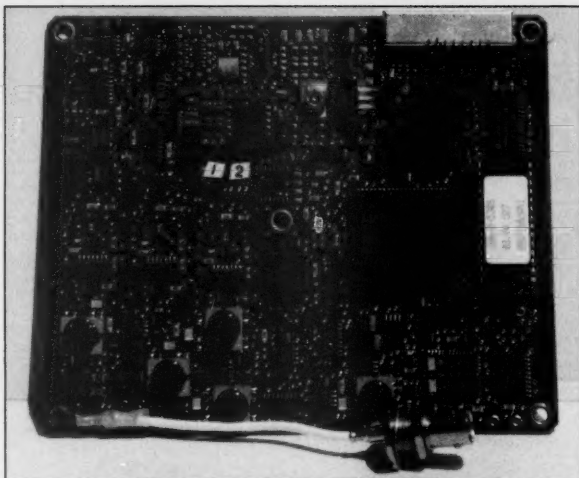


Photo A. LORAN receiver PC board with BNC connector.

is the MMIC. This MMIC is a Microwave Module Integrated Circuit and all circuit parameters are matched to 50 ohms on both the input and output of the device. Specific design requirements are not necessary, as in the GaAsFET-type amplifier, making amplifier design quite easy. Most normal MMICs that I am familiar with are good for something up to 2 to 3 GHz at best. While there are MMICs that operate at much higher frequencies, their prices are prohibitive.

However, all that has changed with Hewlett Packard's new MMIC, the MGA-86576 MMIC. The frequency response of this device is good from a low frequency limit of 1 GHz to just over 10 GHz. This device sports about 20 dB of gain over the 1-to-10-GHz range, and noise figures under 3 dB. Now the best part: These devices cost about \$8 each in single quantity from Hewlett Packard Distributors. Kerry N6IZW made a circuit test using one of these devices using a 10 GHz stripline PC board that was originally made for a Mgf-1402 GaAsFET, and cut off the tuning tabs leaving only the bias lines and 50 ohm stripline. Usable gain as measured at 10 GHz was 13 dB, and the noise figure was not measured but observed very near the 3 dB estimated. See Figure 1, the MMIC circuit diagram.

I plan to do more testing on this device and have ordered several more devices to experiment with. I will report on further tests as they develop. From the first test runs, this Motorola MMIC device has us very impressed due to the very inexpensive nature and wide frequency band of operation. Add this device to your system and you should see quite an improvement in receiver operations.

Microwave Dish Alignment

The next simple item that can be useful is dish pointing and alignment, specifically vertical dish alignment. When you know where the proper vertical alignment is, it's not a problem.

However, when you need a calibration marker this is a difficult calibration. How do you construct a calibration device for this purpose? This problem can be easily solved by adding an old meter movement to your dish tripod. This meter movement can be a defective meter from surplus. Mount the meter upside down on your dish, with the center of the meter movement pointing downward. This meter will now serve as an indicator of your dish antenna—use the indicator as calibration marks to reference the vertical angle or incline your dish is now aimed at.

Basic calibration is accomplished by adjusting the meter needle to a reference point when copying a remote beacon or station. First copy a beacon whose position is known; that will give you a good horizontal compass reference. Then, rock your dish in the vertical position for best signal strength and set the meter to its reference. Now you can rock the dish in other test inclines and try for that faraway shot, knowing (without guesswork) a good position (which should be near the correct position) for your dish. This allows you to return to a calibration point without guesswork. It's basically an incline meter from a very unusual source. It doesn't even matter if the meter is any good, just that the meter movement swings free with gravity. You must remove the meter movement spring from the meter for free movement of the indicator on the meter.

The next point is distance alignment, your horizontal compass heading. In this category you need to know where you are and have some method of accurately pointing your dish antenna at the other station. Needless to say, the other station has to know where he is located. A six-figure grid square location is sufficient for this heading. Up on big rock candy mountain near the cutoff, "about 30 miles from wherever" just doesn't cut it. Trying to use locations like that would be like swatting flies blindfolded. It can be



Photo B. One of our "secret" surplus yards being observed by Kerry N6IZW. Note the large CRUSHER on the right, (not a space alien or relative of Dr. Crusher of STAR TREK fame). Surplus electronic items are saved from this and other similar junkyard tools of destruction.

report what its frequency is, as compared to a precise cesium or rubidium oscillator at the LORAN transmitting site. The error will be in the transmission medium, which is minimum compared to WWV HF 5, 10 MHz, etc. The Loran receiver's internal program will report the frequency offset of the on-board oscillator and print out the reading. We can connect a frequency counter to the LORAN receiver and monitor this frequency and use it as a transfer standard to calibrate your frequency counter.

The receiver must be receiving Loran signals and be locked up in normal mode. For example, if the program reports the oscillator frequency to be 8.0000234 MHz, your counter connected to the LORAN receiver oscillator pin should read the same frequency to make them agree. Adjust your counter calibration oscillator to make the readings agree. It's a little touch and go, but when LORAN signals are being copied well it gives an excellent transfer standard. Loran master frequency standards are maintained to very near perfection, a few parts in ten to the twelfth. At present there is no reason you cannot obtain calibration to a number of parts in ten to the ninth. We are working on refinements to this step to obtain better frequency transfer results and will report on future findings as they happen.

Let's get back to horizontal dish position and where you are in respect to your horizontal horizon. The LORAN receiver receives a complex signal from a string of stations on 100 kHz and uses the timing and coding pulses to enable the receiver to determine where it is located. This data is part of the serial data that is displayed on the PC computer as the latitude/longitude information for your location. This data could be inserted into one of several grid square programs to allow you to calculate just where you are situated and display the latitude/longitude information as a six-figure grid square location, like DM12LT. The grid square program would have to be modified to accept the data directly from the LORAN receiver. This has not been done at present, but it is a future project. For the time being, operation will have to be manual. Perhaps someone reading this column will incorporate this feature and report back.

The information from the LORAN receiver can be of great benefit to a rover who is working fast-paced contacts to a series of fixed microwave stations operating in contests similar to the ARRL 10 GHz contest. After a set of contacts is made, the rover packs up and moves on to another location 10 miles farther down the road. All equipment and antennas are mobile-mounted, making setup fast. The benefit LORAN would present is determining, with good accuracy, when you are positioned in the area you think you are. For most locations this data can be confirmed by simple map interpolations compared to your surroundings. But when the distance between

any distinguishable feature is great, uncertainty is the real answer. Errors in your position can make dish pointing critical at best. Considering that a standard 30" dish has a beam width of less than 3 degrees, horizontal and vertical location is very important for fast contacts on microwave.

Knowing where the fixed station is located is great and can be set up with a compass to good agreement towards that station. However, the fixed station does not know with certainty where you are in respect to a very narrow dish's beam width (less than 3 degrees). If you can provide your location to a specific six-figure grid square and be accurate, this problem can be eliminated with accurate dish positioning and setup. In most cases antennas can be aimed at each other and initial contacts can be made even over paths of several hundred miles. By eliminating wobble from the wheels of frequency and aiming, you will leave uncertainty behind. Knowing where you are and on what frequency provides nearly armchair-quality performance. It's almost like shooting fish in a barrel.

One question remains, I suppose, and that is: How do you take a 100 kHz antenna into the field and make it portable? Well, these systems are made to operate on very short active antennas that have a high-gain preamplifier connected to a short receive antenna for mobile use. An active antenna could be home-brew constructed as its circuitry is not too difficult to reproduce. Power for the active antenna is a normal provision from the LORAN receiver and is furnished on the antenna connector center conductor that feeds the active antenna. In this case 15 volts is supplied up the coax for this purpose. Usually these preamps will operate on anything from 8 to 15 volts at 5 mA or so.

A commercially-produced antenna can be obtained from MAXRAD (available through some ham radio dealers), an antenna products company, for under \$50. The basic active antenna model MXLB-100 is \$27, and the simplest of antenna mounts (magnetic) model GBN is \$15. Performance quoted is -5 dB to unity gain for this compact 100 kHz antenna.

As always, I am experimenting and am working on an active antenna and want

to incorporate a ferrite element to give frequency immunity to out-of-band signals that seem to interfere with the basic active antenna circuit. Some of the active antennas are broadband wide-open circuits and as such could receive 60 cycles as well. To prevent this problem I would like to try a simple filter to eliminate out-of-band signals

having the antenna resonate at about 100 kHz. A similar problem happened while trying to receive WWVB on 60 kHz. I used a longwire antenna and had so much interference it was not copyable. Placing a filter at 60 kHz in the antenna lead made a marked improvement in performance. I plan to attempt the same thing with the Loran antenna in addition to gain in the circuit. This is still speculative, but some further experimentation will prove or disprove the worth of this plan.

Both Kerry and I have noticed severe interference to the LORAN receiver in tests where the unpackaged receiver was placed on top of or near the computer terminal that was running the BASIC program. Moving the unshielded PC board away from the computer some two feet seemed to cure the problem of the receiver not receiving the LORAN signals. The computer was radiating energy, blocking the receiver. The receiver was connected for these tests on the workbench without benefit of a shielded box or feed-through capacitors for the DC or computer port connections. This, like anything else, is not a finished product, but it is a starting point, and it provides the fun of picking through surplus material for toys to play with. (See Photo B.)

Well that's it for this month. I hope that the information provided here will assist you with microwave operations in remote locations. Whether you choose to use Loran or GPS for position accuracy is a matter of choice. We have operated without benefit of systems such as this and had a good time. However, it's another toy to put into the toy box for fun, and it offers operation improvement. I hope to have enough time to be able to report further on the LORAN receiver active antenna project and LORAN operation in general next month.


I have a quantity of LORAN receiver PC boards and will make them available for amateur purposes. Tested LORAN PC boards are \$25 each postpaid, to U.S./Canadian destinations only (contact me at the address at the beginning of this column). As always, I will be glad to answer questions about this and other related VHF, UHF, microwave subjects. 73 WB6IGP Chuck.

```
10 DIM X$(40)
20 OPEN "com1:1200,N,8,1,RS" AS #1
30 C$="OD"
40 GOSUB 130
50 GOSUB 180
60 C$="A"
65 S=0
70 GOSUB 130
75 PRINT "LAT LONG ST POSER MODE"
80 GOSUB 180
90 C$="B"
95 S=1
100 GOSUB 130
110 GOSUB 180
115 PRINT
120 GOTO 60
130 PRINT #1,C$;
140 PRINT #1,CHR$(15);
150 PRINT #1,CHR$(10);
160 RETURN
170 GOSUB 180
180 D=0
190 X$(D)=INPUT$(1,#1)
195 IF S=1 THEN 210
200 PRINT X$(D);
210 FOR I=1 TO 100
220 NEXT I
230 V= EOF(1)
240 IF V=-1 THEN 280
250 D=D+1
260 GOTO 190
270 END
280 PRINT
281 IF S=1 THEN GOSUB 400
290 RETURN
400 FOR I=2 TO 5
410 IF X$(D)="F" THEN H(I)=15
420 IF X$(D)="E" THEN H(I)=14
430 IF X$(D)="D" THEN H(I)=13
440 IF X$(D)="C" THEN H(I)=12
450 IF X$(D)="B" THEN H(I)=11
460 IF X$(D)="A" THEN H(I)=10
470 IF X$(D)="9" THEN H(I)=9
480 IF X$(D)="8" THEN H(I)=8
490 IF X$(D)="7" THEN H(I)=7
500 IF X$(D)="6" THEN H(I)=6
510 IF X$(D)="5" THEN H(I)=5
511 IF X$(D)="4" THEN H(I)=4
512 IF X$(D)="3" THEN H(I)=3
520 IF X$(D)="2" THEN H(I)=2
530 IF X$(D)="1" THEN H(I)=1
540 IF X$(D)="0" THEN H(I)=0
545 NEXT I
550 T=H(5)+16*H(4)+256*H(3)+4096*H(2)
560 IF T>8000 THEN T=T-85536
570 OSC#= 8*T/256 +8000000#
575 PRINT
580 PRINT OSC#;" MHz"
710 RETURN
```

Figure 3. Basic program of LORAN receiver operation. This program will print out latitude, longitude, status monitor, position error and Loran mode that the receiver is reporting.

AMATEUR TELEVISION

GET THE ATV BUG



≥10 Watt pep

**Transceiver
Only \$499**

Made in USA
Value + Quality
from over 25 years
in ATV...W6ORG



Snow free line of sight DX is 90 miles - assuming 14 dBd antennas at both ends. 10 Watts in this one box may be all you need for local simplex or repeater ATV. Use any home TV camera or camcorder by plugging the composite video and audio into the front phono jacks. Add 70cm antenna, coax, 13.8 Vdc @ 3 Amps, TV set and you're on the air - it's that easy!

TC70-10 has adjustable 10 Watt p.e.p. with one xtal on 439.25, 434.0 or 426.25 MHz & properly matches RF Concepts 4-110 or Mirage D1010N-ATV for 100 Watts. Hot GaAsfet downconverter varicap tunes whole 420-450 MHz band to your TV ch3. 7.5x7.5x2.7" aluminum box.

Transmitters sold only to licensed amateurs, for legal purposes, verified in the latest Callbook or send copy of new license.

Hams, call for our complete 10 pg. ATV catalog including downconverters, transmitters, linear amps, and antennas for the 400, 900 & 1200 MHz bands.

(818) 447-4565 m-f 8am-5:30pm pst Visa, MC, UPS COD


P.C. ELECTRONICS

2522 Paxson Lane Arcadia CA 91007

Tom (W6ORG)
Maryann (WB6YSS)

QSO Tutor

Study Aid for the Amateur Radio Exams



- Runs on IBM compatibles or Macintoshes
- Programs are available for Novice, Technician, No-Code Technician, General, Advanced and Extra Amateur class exams as well as Commercial Radiotelephone and Commercial Radar Endorsement. Each program sold separately.
- Work with the entire question pool, or study questions automatically selected by the program from your weakest areas.
- Current Question Pools
- Includes full screen graphics, explanations on appropriate questions and, on the IBM version, a pop-up calculator.
- Logs multiple study sessions and allows resuming at a later time. Returns to review missed questions if desired.
- Creates randomly generated sample tests on-line or printed with graphics on Epson/IBM or Macintosh printers.
- Public Domain Morse code tutor is included on request at no extra charge.

\$29.95 per class for Novice thru Extra and Comm. Radar and Morse code. Price includes shipping.



QSO Software

208 Partridge Way
Kennett Square, PA 19348
215-347-2109 (Voice or FAX)

Compare the features - No other theory tutor contains the entire question pool, explanations, graphics, progress analysis and automatic concentrated study where you need it.

"Great Programs - I passed the advanced and extra licenses both in one morning! After 12 years as a general. The sample test portion really got me going! See you in the pileups!" **WB6YJF**

"As far as I am concerned, there is nothing like the QSO Tutor program. I have tried another and believe me, there is no comparison." **K4JZDE**

"The most advanced program I've tried... Graphics are extraordinary... This program should be your first consideration." **Gordon West - Worldradio**

"Do I recommend the QSO Tutor? Heavily, yes! It really motivated me and it's a great way to test my progress. The learning is a natural by-product of the fun I am having." **Jim Ball - 73 Magazine Review**

Also Available:

QSO Controller
The ultimate companion for controlling late model Kenwood rigs.

- Full mouse driven graphical user interface.
- Controls all functions of TS-950, 940, 850, 811, 711, 450, 440 and 140.
- Includes integrated logging, custom scanning, extended memories with annotation, real time S & multi-meters on screen, GMT, in/out-of band conditions by license class, and much more.
- Available for Macintoshes and IBM compatible (EGA or VGA only)
- Call or write for details **\$99.95**

\$39.95 per class for No-Code Tech (Novice and Tech programs) and Commercial Radiotelephone

1 800 483-3973

(1 800 GUD DX 73)

Ordering info please read

CIRCLE 145 ON READER SERVICE CARD



OWN THE WORLD'S BEST TURBO-DIESEL BASE STATION

Add a QMS Antenna Tuner System to your SSB.

\$895.00

The QMS is an SGC Smarttuner® automatic antenna coupler, an SG-303 extended full-range antenna, and the special exterior—waterproof—mounting package, all in one.

Trucks are America's working rigs. And now, with a QMS strapped on the side, they're also one of the world's best base station configurations. It may look a little unusual, but the QMS gives any mobile HF-SSB an almost unbelievable jump in reception and transmitting range (3-20 db). Match it with a cutting edge SGC HF-SSB and it will blast holes through major mountain ranges and probably some laws of physics. Power and focus are everything in HF-SSB ham rigs. Buy this and own the best 3/4 ton base station on the road.

Mounting the tuner and antenna on the outside reduces engine noise and eliminates power draining antenna wires runs between the antenna and tuner.

QMS. It's the look of focused power.

LEARN TO LOVE THE LOOK



**NO COMPROMISE
COMMUNICATIONS**



1-800-259-7331

The SGC Building P.O. Box 3526 Bellevue, WA 98009 USA (206) 746-6310 Fax: (206) 746-6384

CIRCLE 188 ON READER SERVICE CARD

73 Amateur Radio Today • August, 1994 75

Ask KABOOM

Number 21 on your Feedback card

Your Tech Answer Man

Michael J. Geier KB1UM
c/o 73 Magazine
70 Route 202 North
Peterborough NH 03458

Intermittents!

Last month, we were discussing clipping, and I promised to go over its effects in the digital realm. So, let's finish that up before we get to this month's topic.

Playing the Numbers

Digital signals can be created in two ways: from digital information, such as that coming from a microprocessor, or from analog information, after passing it through an analog-to-digital (A/D) converter. With digitally-originating signals, parameters are well defined; You always know the makeup of the signal. After all, there are just so many codes to go around, given the number of bits for which the circuit is designed.

Analog information, however, has no such tidy rules. If you're going to convert a changing voltage into a representative series of bits, you must set some limits. How do you know how big the analog signal will be? You don't, at least not exactly. Sure, you can scale it to some approximate

level, using amplifiers for gain and resistors for loss. But, there's no way to ensure it'll be *exactly* the optimum size, which is whatever will use up all the available digital codes without trying to go past the highest one. So, what's to prevent your making the signal a little too small, just to be sure it doesn't overdrive the A/D converter? Well, nothing, but you'll be wasting some bits, due to their never getting turned on.

Stop!

In effect, though, an A/D converter is self-limiting. As the input signal reaches the level beyond which the converter cannot generate a higher number, it just keeps outputting the highest number it can until the signal drops below the limit. The result is a digital signal which represents clipping much like the kind you get with an overdriven analog amplifier.

But it's not exactly the same. In theory, it should be. In a real analog circuit, though, clipping doesn't occur instantaneously. Rather, the circuit's gain begins to get non-linear as the signal approaches the acceptable limits, and then full clipping occurs soon after. The result is what you might call "soft clipping." An A/D converter, how-

ever, stays completely linear up to its limits, and then it clips completely. So, the resulting square waves have very steep sides, making for a particularly ugly kind of distortion called "hard clipping."

So, if you clip an A/D converter, the resulting bits will represent a highly distorted version of the input signal. It's important to remember, though, that those bits themselves are perfectly fine, and the rest of the digital system can process them with no trouble; they just don't represent what you wanted.

Can you clip a digital-to-analog (D/A) converter? No. Bits come in, and whatever they represent comes back out as analog. Bits themselves can't clip. Of course, if they represent a distorted signal, that's what you'll get. But you can't fault the bits or the D/A converter.

Well, I think that about does it for clipping. Now, let's get to something else.

A Bad Night's Sleep

Wanna give a technician headaches and nightmares? Just sneak up and whisper the word "intermittent." That ought to do it! Nothing in the wonderful, wacky world of electronics is more frustrating. Why does something work, then not work, and then work again?

Plenty of things can cause intermittent operation, but by far the number one cause is a bad connection. Big deal, right? A few minutes with a

magnifying glass and a soldering iron and all will be fixed. Well, think again. Sometimes, finding the problem can be easy, but often it is very difficult, and now and then it's just plain impossible. Let's take a look at the different kinds of bad connections you can run into and how you might smoke them out.

Leaves Me Cold

When is hot cold? When it's a cold solder joint! Many intermittents are caused by bad joints. Sometimes you can see the darned things, while other times they look perfectly normal. If you see dull, crumbly looking solder, chances are you've got a bad joint. Especially if you can see the component lead sticking out, with obvious cracks or space between it and the solder around it, you can be sure that joint's cold. How do solder joints get that way? Most are born that way; not enough heat was used to make the joint. Remember, solder isn't just globbed on; it's supposed to make a molecular bond. It takes significant heat to do that, and, if the temperature doesn't go high enough during the soldering process, the bond won't form. Typically, though, the joint will work for awhile—at least long enough for the unit to pass quality inspection and be shipped out to you. In your home, of course, it starts to die fast. Sometimes it's not so fast. I've seen cold joints which worked fine for years and then suddenly went bad.

But, you say, most devices aren't

DEALER DIRECTORY

Number 22 on your Feedback card

DELAWARE New Castle

Factory authorized dealer! Yaesu, ICOM, Kenwood, Ten-Tec, AEA, Kantronics, DRSI Mfg., Amertron, Cushcraft, HyGain, Heil Sound, Standard Amateur Radio, MFJ, Hustler, Diamond, Butternut, Astron, Larsen, and much more. **DELAWARE AMATEUR SUPPLY, 71 Meadow Road, New Castle DE 19720. (302) 328-7728.**

NEW JERSEY Lodi

North Jersey's newest Two Way Radio and Electronics Dealer is now open. Sales of Ham, Business, Marine and C.B. two way equipment as well as Scanners, Shortwave, Electronic Kits, Antennas, Books, Cable Boxes and more. Friendly service and low prices. **Advanced Specialties, 114 Essex Street, Lodi NJ 07644. (201) VHF-2067.**

NEW JERSEY Park Ridge

North Jersey's oldest and finest Shortwave and Ham Radio Dealer. Three minutes from Garden State Pkwy and NY Thruway. Authorized Dealers for AEA, Alpha Delta, Diamond, ICOM, Japan Radio Company, Kenwood, Vectronics, Yaesu, Ham Sales, Lee WK2T. **GILFER SHORTWAVE, 52 Park Ave., Park Ridge NJ 07656. (201) 391-7887.**

NEW YORK Manhattan

Manhattan's largest and only ham Radio Store, also full line of Business, Marine, Aviation, Shortwave Radios and Scanners, and Cellular Phones and Beepers. Large selection of Books, Antennas, Test Equipment, coaxial cable and parts. Full Ser-

vice Repair Lab on premises. Our 44th Year... We carry all major lines: MOTOROLA, ICOM, KENWOOD, YAESU, BENDIX-KING, ASTRON, AEA, SONY, PANASONIC, MFJ, CCTV CAMERAS AND MONITORS, BIRD WATTMETERS, FREQUENCY COUNTERS, SCANNERS, HY-GAIN, VIBROPLEX, HEIL, CALLBOOK, ARRL, OTHER PUBLICATIONS. Open 7 days M-F, 9-6 p.m.; Sat., 10-5 p.m. Sun. 11-4 p.m. We ship Worldwide. Call, Fax, or write for information and prices. Your one Source for HAM and Business Radios... **BARRY ELECTRONICS, 512 Broadway, New York NY 10012. (212) 925-7000. FAX (212) 925-7001.**

OHIO Columbus

Central Ohio's full-line authorized dealer for Kenwood, ICOM, Yaesu, Alinco, Japan Radio, Standard, AEA, Cushcraft, Hustler, Diamond and MFJ. New and used equipment on display and operational in our new 10,000 sq. ft. facility. Large SWL Department, too. **UNIVERSAL RADIO, 6830 Americana Pkwy., Reynoldsburg (Columbus) OH 43068. (614) 886-4267.**

PENNSYLVANIA Trevose

Authorized factory sales and service. KENWOOD, ICOM, YAESU, featuring AMERITRON, B&W, MFJ, HYGAIN, KLM, CUSHCRAFT, HUSTLER, KANTRONICS, VIBROPLEX, HEIL, CALLBOOK, ARRL Publications, and much more. **HAMTRONICS, INC., 4033 Brownsville Road, Trevose PA 19047. (215) 357-1400, FAX (215) 355-8958. Sales Order 1-800-426-2820. Circle Reader Service 298 for more information.**

UPDATES

Number 23 on your Feedback card

HI-PER Audio Filter

With regard to the above mentioned project, which appeared in the May, 1994 issue of 73, page 10, please note the following: The PC board component placement overlay (Figure 3) shows the polarity for the DC input in reverse. To see this more clearly, please refer to the schematic (Figure 2) where C16 is correctly polarized across the DC input.

The Parts List and overlay call for C17, but C17 does not appear on the schematic. The schematic should show C17 parallel to C3, going to ground. This was omitted on the schematic—it is correct on the overlay.

C1, 3, 14, and 16 are 100 μ F 16V

electrolytics according to the Parts List, but on the schematic C1 and 14 are called 10 μ F caps. Either value will work well; the values are not critical here.

Fast Charger

Refer to the above article in the May issue of 73, page 22. The article recommends a TK4355 inductor for L1, but that part is no longer available.

A suitable replacement can be found at Radio Shack, with a slight modification. The RS part #273-102 is a 100 μ H coil. "Fast Charger" requires a 47 μ H coil for L1. To modify the RS part, simply unwind half the windings, scrape off the protective enamel coating from the end and resolder.

**Sell your product in
73 Amateur Radio Today.
Call Dan Harper at
1-800-274-7373**

DEALERS: Your company name and message can contain up to 50 words for as little as \$420 yearly (prepaid), or \$210 for six months (prepaid). No mention of mail-order business please. Directory text and payment must reach us 60 days in advance of publication. For example, advertising for the April '93 issue must be in our hands by February 1st. Mail to 73 Amateur Radio Today, 70 Rte. 202 N, Peterborough, NH 03458

hand-soldered anymore. How can a wave-soldered board have this problem when the entire board has been dipped in a molten solder bath? Actually, most cold joint problems I've encountered have been on wave-soldered boards. Apparently, the heat sometimes just isn't turned up high enough. The small parts come out fine, but the larger ones sink enough of the heat that their leads don't get hot enough to form the proper bond. That results in the classic "lead sticking out from hole in the solder" syndrome. In fact, this problem is so common I recommend checking the leads of big components first, particularly on wave-soldered boards. On the other hand, I haven't seen too much trouble with surface-mounted devices (SMDs), probably because they're so small that they get plenty hot enough for proper bonding. Also, special low-temperature solders are used with those parts.

Gets Me Hot

Operating heat sometimes can create cold joints. I've seen anode caps on transmitting tubes actually lose the solder where the caps joined their wires. I don't mean that the solder melted—it actually disappeared altogether! The cause? The heat of the tubes. Or perhaps it was the high voltage; I don't know. It's also possible for power transistors and resistors to fry their joints, although the solder usually doesn't disappear, it just gets dull and crumbly.

Wiggle It

A great way to find cold joints is to gently wiggle the board, taking care not to get shocked or cause unwanted signals to enter the circuit through your finger. The best way is with an insulated tool of some kind. For small boards, I like to use a cotton swab stick with one end cut off. I hold the cotton end and use the stick to press

on the board, pushing on various spots until I can localize the reaction. For bigger assemblies, I use the insulated end of a small screwdriver.

Does it work? Sometimes. But often, I think I've found the right spot, only to discover much later on that the real trouble was nowhere near where I was pressing. Unfortunately, the effect of leverage sometimes can cause greater movement somewhere across the board than where I pushed. I've had some tremendously frustrating times with that sort of thing.

"A great way to find cold joints is to gently wiggle the board, taking care not to get shocked or cause unwanted signals to enter the circuit through your finger."

Cracked Up

Not all intermittents are caused by bad solder joints. Tiny cracks in PC boards used to be big offenders, but I haven't seen much of that kind of trouble in awhile. I suspect that improved board-making techniques have reduced the problem. Still, if an intermittent rig has been dropped, and you can't find bad joints, suspect a board crack. With reasonably sized, single or double-sided boards, fixing cracks isn't hard. But, with multilayer boards or the very fine lines you are likely to find in a modern HT, you may be looking at a disaster.

Going To Extremes

Some intermittents are caused or exacerbated by thermal changes. With cold solder joints, changes in temperature can result in a connection's going on and off again. Also, some damaged semiconductors can exhibit the same behavior. If the rig

works at first and then goes wacky (the usual scenario), get some coolant spray and start spraying parts around the suspect areas. When you hit the right one, you'll know it, because the circuit will start working again, at least for a few minutes. If, however, the radio misbehaves at first and then settles into normal operation, use the coolant spray to make it screw up.

In some cases, you can also make great use of a hair dryer. If you already have one, it's cheaper to use it

to find, because they react both thermally and physically when you flex the board.

Finally, always check switches and relay contacts for intermittents. Any time you pass a signal through a mechanical, unsoldered connection, you're looking for trouble. Relays are big offenders.

Well, I hope you don't have nightmares from thinking about intermittents! I know I've had plenty of them. Now, let's look at a letter:

Dear Kaboom,

I have a big junk box with lots of different kinds of parts from old radios, TVs and even a radar detector. Unfortunately, many of these potentially useful goodies don't have standard markings like 2N or 2SC. Are there any publications which could cross-reference the odd numbers? Also, are there any books of technical data for transistors and ICs?

Signed,
Electron Wanderer

Dear Electron,

Many of your parts probably have "standard" numbers you don't recognize. There are various systems in use throughout the world, and some don't show up here in the USA enough for us to become familiar with them. Check with an electronics supply house, either locally or via catalog, and you should be able to get some cross-reference books. But beware: Some parts are marked only with "house numbers," which are made up by manufacturers for their internal use. There's no book which can help with that. As for technical data books, Motorola, TI and all the other big manufacturers sell them, and having a few is an absolute must for serious experimentation or troubleshooting.

Until next time, 73 de KB1UM. **72**

HIGH POWER RF SWITCHED PREAMPS



Model 146
\$165
Model 1460S
\$165
Model 440
\$179

Model 146 160W 2 Meters 19db Gain .75db NF
Model 1460S 160W 2 Meters 19db Gain .75db NF
Model 440 70cm 100W 16db Gain .75db NF

All preamps have helical filters to prevent out of band intermodulation in the receiver. Model 146 covers the entire 2 meter band. Model 1460S is of very narrow bandwidth and would be suitable for SSB, Packet, or Satellite. Model 440 is factory tunable from 430-440 MHz or 440-450 MHz per customer request. All models are powered with 13 to 20 VDC and are mounted at the antenna.

AMPIRE, INC.
10240 NATHAN LANE
MAPLE GROVE, MINN 55369 612-425-7709



Factory Authorized Dealer & Service For

**KENWOOD
YAESU
ICOM**

**Call Us For
Great Prices & Great Service**

TOLL FREE ORDER LINE 1-800-344-3144
Continental U.S. & Texas

KCONIA, INC. SAN ANTONIO TEXAS
THE HAM CENTER
SALES AMATEUR RADIO SERVICE
5730 Mobud San Antonio, TX 78238 (512) 880-6110
FAX (512) 647-8007

Subscribe to
73 Amateur Radio Today
Call 800-289-0388

BATTERIES

Nickel-Cadmium, Alkaline, Lithium,
Sealed Lead Acid For Radios, Computers,
Etc. And All Portable Equipment

**YOU NEED BATTERIES?
WE'VE GOT BATTERIES!**
CALL US FOR FREE CATALOG



E.H.YOST & CO.
7344 TETIVA RD.
SAUK CITY, WI 53583
(608) 643-3194
FAX 608-643-4439

CIRCLE 114 ON READER SERVICE CARD

73 INTERNATIONAL

Number 24 on your Feedback card

Arnie Johnson N1BAC
43 Old Homestead Hwy.
N. Swanzey NH 03431

Notes from FN42

The June ARRL VHF/UHF contest was held last weekend (June 4-5). This has become one of the fun ham weekends in the Keene, New Hampshire, area through the years. We try to come up with a respectable score with our limited efforts: 6m, 2m, and 70cm (SSB and CW) and 223.5 MHz FM. Even though this year's totals were down from past years, we had a good time.

VHF/UHF contests can be a lot of fun even if you only have one band. We heard many operators operating FM simplex from hilltops or mountaintops with just their mobile radios and antennas. Plus, many of those operators operated for just a few hours to give others a point or two. It was also amazing just how far you can hear an FM simplex signal if good locations are available. One that I remember was on 223.5 MHz from the New Jersey area to us in New Hampshire, and we were using an omni antenna, no beam, and an IC-37A, no amplifier.

Don't let lack of equipment keep you from giving it a try.

Another fun ham weekend takes place every June, namely Field Day—which this year took place on June 25-26. This is another kind of event for which you don't need a lot of sophisticated equipment to have a good time. You can even operate from your own QTH if you don't want to get involved with emergency power. I know of many who feel it is the most enjoyable event of the year, taking their low-power HF rig, a wire dipole, and car battery, and making a family camping weekend out of it. As you can imagine, many other

campers show up to ask what the ham is doing; some stick around to find out about ham radio, others just walk away shaking their heads.

However you do it, Field Day can be a great amount of fun with a bunch of your friends.

I received a great letter today from Gerard Paquette VE2AW, with an enclosed QSL card confirming an FM contact with a high-altitude weather balloon repeater launched from Hawkesbury, Ontario, Canada, on 30 October 1993. Mine was just one of approximately 500 two-way contacts made to Gerry by radio amateurs in the United States and Canada.

This contact was made with a radio with an output of about 15 watts into a 14-element horizontal beam. If you consider that the balloon repeater was probably using a vertically-polarized antenna, I feel very lucky that it even heard my horizontal signal.

If you have any questions to ask of Gerry, or maybe even some monetary support to offer, contact him at: A/S Gerard Paquette VE2AW, 890 rue Hudson, McMasterville, QC J3G 5C3.

Until next month, 73 de Arnie N1BAC.

Roundup

England [Information from Ted Melinosky K1BV, The K1BV Directory of DX Awards, HCR 10-Box 837A, Spofford NH 03462] From Fred Handscombe G4BWP: "I am happy to inform you of my appointment as Radio Society of Great Britain (RSGB) HF Awards manager. All applications for RSGB Awards (except IOTA) should now be sent to me. Some very old information exists and several award managers still receive mail. I hope the RSGB programme will now enter a period of stability in its management!"

ability in its management!

"I also act as the National QSL checkpoint for UK applications for overseas awards, where this is an acceptable method."

An information package of the latest RSGB HF Awards is available from Fred Handscombe G4BWP for £1.50, \$3.00, or 5 IRCs to cover airmail postage. Fred's address is: Fred Handscombe G4BWP, RSGB HF Awards Manager, Sandholm, Heath Farm Road, Red Lodge, Bury St. Edmunds, Suffolk, IP28 8LG, England.

Switzerland From the International Telecommunication Union Press: The ITU Council adopted unanimously on May 10, 1994, a resolution authorizing the Government of National Unity of South Africa to resume its full participation in the conferences, meetings, and activities of the Union with immediate effect. The Chairman of the Council, Mr. Souleymane Mbaye (Senegal), informed the entire membership of the Union the same day.

The Council is the management body which meets once a year and acts on behalf of the Plenipotentiary Conference when the latter is not in session.

The ITU Plenipotentiary Conferences had successively adopted resolutions in 1973, 1982, and 1989, which excluded the Government of the Republic of South Africa from the Plenipotentiary Conference and from all other conferences and meetings of the Union. Resolution 12 adopted in 1989 by the Nice Plenipotentiary Conference had provided for the continued exclusion of the Government of the Republic of South Africa until the elimination of the apartheid policies.

The most recent developments in South Africa, culminating in the holding of the first free democratic elections, led the Council to consider that the apartheid policies had ended and hence to decide to repeal Resolution 12.

The next Plenipotentiary Conference will be held in Kyoto, Japan, September-October 1994.

For further information, write to: International Telecommunication Union, Place des Nations, CH-1211 Geneva 20, Switzerland. Telephone: National (022) 730 5111; International +41 22 730 5111; Telefax +41 22 733 7256.

Taiwan Letter from Bolon Lin BV5AF: Some information for your reference: BV10SAT—May 15-22, For Taiwan Amateur Satellite Association (TAMSAT); QTH Changhua 500, Mid-Taiwan area; QSL via BV5AF, P.O. Box 39, Changhua 500, Taiwan.

BV0RI—June 12-15 for Rotary International 1994 Convention; QTH Taipei, Taiwan; QSL via CTARL Bureau, P.O. Box 73, Taipei 100, Taiwan and/or P.O. Box 93, Taipei 100, Taiwan.

BV5EV, Handler/Operator: Linda Lai, YL student; QTH Changhua 500, Taiwan; QSL via CTARL Bureau, P.O. Box 73, Taipei 100, Taiwan. Bolon Lin, BV5AF, P.O. Box 93, Taipei 100, Taiwan.

Turkish Republic of Northern Cyprus/USA Letter from Igor Zdorov KU0J: The Turkish Republic of North Cyprus (TRNC) celebrated its 10th anniversary in 1993. In 1992, after a law authorizing ham radio there was passed, the Telecommunications Administration of TRNC issued the first license to 1B1NCC, Northern Cyprus Club. After that, four permanent licenses to local hams, 1B1AA, AB, AC, and AD, were issued. Unfortunately, 1B1AC passed away in the summer of 1993. Nevertheless, ham radio in TRNC is gaining its momentum. In 1993, 1B/DK7ZZ was on the air for two weeks, followed by my almost-three-weeks-long operation as 1B/KU0J in December. Because both 1B1AA and 1B1AB were overseas on business at that time, and 1B1AD was using mostly phone, I put my emphasis on CW and made about 10,000 QSOs on all HF bands 10 through 160, including WARC. Over 50% of my contacts were with state-side hams.

In March-April of 1994, Baldur

⇒ New to Packet?

⇒ Have Doubts About Your Settings?

⇒ Which Software Works Best?

⇒ Will My Rig Run 9600 Baud?

Find Answers in Packet Power!

This exclusive publication is full of practical, instantly usable tips and techniques—all presented in a relaxed and friendly format. Hands-on, step-by-step tutorials and articles, such as:

- optimizing your system settings
- how weak signals foul up networks
- why older rigs work better for packet


- ☐ 24 months of Packet Power for \$37
- ☐ Twelve months of Packet Power for \$20
- ☐ Six months of Packet Power for \$12

Specify disk size (3.5 or 5.25 and HD or DD with subscription order). Make check to Packet Power. Texas residents add 6.25% state sales tax. Offer ends August 30, 1994. US addresses only. Sample issue \$1.

Packet Power • PO Box 189 • Burleson, TX 76007

CIRCLE 233 ON READER SERVICE CARD

THIS MONTH'S GOODIE FROM THE CANDY STORE

	KENWOOD TH-22AT	Under \$250.00
Similar Savings on AEA, Icom, Astron, Yaesu, Cushcraft, Alinco, etc. All L.T.O.		
KENWOOD	TH-315A	\$340.00
Over 9000 Ham Items in Stock, All Prices, Cash FOB Preston.		
More Specials in HAM-ADS Looking For Something Not Listed??		
Call or Write. To save time and money, have the model number ready.		
Call Today (208) 852-0830		
ROSS DISTRIBUTING COMPANY		
78 S. State Street, Preston, ID 83263		
Hours Tue.-Fri. 9-6 • 9-2 Mondays, Closed Sat. & Sun.		

CIRCLE 254 ON READER SERVICE CARD

CABLE T.V. CONVERTERS

Jerrold™, Oak, Scientific Atlantic, Zenith, & many others. "New" MTS stereo add-on: mute & volume. Ideal for 400 & 450 owners.

1-800-826-7623

B & B INC.

3584 Kennebec, Eagan MN 55122

CIRCLE 21 ON READER SERVICE CARD

FLYTECRAFT™ SFZ Indoor Multiband HF Antenna

Work all 7 HF bands between 40 and 10 meters! • Adjustable height between 7' and 12' for use between floor and ceiling. Dismantles to 3'. • Great for outdoor use also! • Top quality construction—bright 6063-T8 aluminum, fiberglass center section, heavy-duty B&W center coil, stainless steel hardware. • Works well inside most buildings. • Antennas are complete—use your own tower, transmatch, or L-network to match to your transceiver. • Uses short counterpoise—no ground needed. • Sets up and dismantles easily and quickly. • Complete instructions supplied. • DON'T let antenna restrictions or inability to install antennas keep you off the air!

Enjoy Your QSO'S with an SFZ



\$179.95 + \$10 S/H
Send Check/\$ Order to: FLYTECRAFT™
P.O. Box 3141
Simi Valley
CA 93093
800-456-1273
For Visa/MC/Info
M-F 9A-5P (PT)
Dealer inquiries invited
For 7580 indoors, use our SFZ-75 Helical.
\$129.95 + \$10 S/H

CIRCLE 251 ON READER SERVICE CARD

HUGE 100 PAGE CATALOG

- Communications Receivers
- Portable Receivers
- Scanners
- Amateur HF Transceivers
- VHF-UHF Transceivers
- HT's and Mobiles
- Amateur and SWL Antennas
- Accessories and Parts
- RTTY and FAX Equipment
- Books and Manuals

This catalog includes prices!

Send \$1 to

Universal Radio
6830 Americana Pkwy. 73
Reynoldsburg, OH 43068
Tel. 614 866-4267

INSURE your Computer & Radio Equipment

HAMSURE coverage follows your equipment wherever you take it. Theft from vehicles, earthquake, water damage and all other hazards including surges. Insure all your equipment and accessories (except towers and antennas but including rotors), media and purchased software. Premiums start at \$50.00 per year.

HAMSURE
at
Stoesser & Vazzando Ltd.
800-443-6242 708-349-0514

Great Circle Bearings Included

CIRCLE 78 ON READER SERVICE CARD

C.P.I.

Dealers for Kenwood, Yaesu, Icom, Cushcraft, AEA, Kantronics, Bencher, Diamond, Astron, MFJ, Hustler, Ameritron, Larsen, ARRL, and more...

Service is also available.


Get your best price then call us LAST!!

(801) 567-9494 - (800) 942-8873
7946 South State Street
Midvale, UT 84047

CIRCLE 156 ON READER SERVICE CARD

SELL YOUR PRODUCT IN 73 MAGAZINE CALL DAN HARPER 800-274-7373

Is Your Shack Grounded?

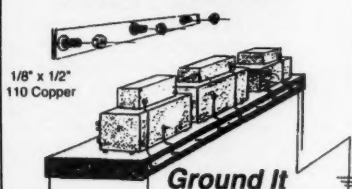

Solid Copper Buss Stainless Steel Hardware
Grounding Stud Every 6 Inches
Top or Back Installation

Ground all of your equipment chassis's to a single earth ground in one easy installation. Money back guarantee, if not satisfied!

+ \$3.50 S&H each 2 ft.....\$11.95 Custom Lengths Available
Mail check/money order to: 3 ft.....\$16.95
J.M.S. 4 ft.....\$21.95
35 Hilltop Ave., Dept. 7
Stamford, CT 06907 **J. Martin Systems**

CIRCLE 26 ON READER SERVICE CARD

PacketPeT For Windows



PC Terminal Software For Your TNC1

- ✓ Use up to 4 TAPR, KAM, MFJ, PacComm or PK88/232 type TNCs in any combination simultaneously
- ✓ Multiple Connect Support, Logging
- ✓ Integrated Text Editor / Viewer
- ✓ Binary File Transfers with Chat
- ✓ ANSI Color Graphics Support
- ✓ Macros & User Definable Menus
- ✓ Selectable Fonts & Colors
- ✓ User Manual & 1 mb of Online Help

\$49.95 + \$2.90 Shipping & Handling
Florida residents add sales tax.
Please Send Check or Money Order and your Amateur Call Sign to:

Chuck Harrington Software, Inc.
1565 Brazilian Lane
Winter Park, FL 32792-2309
(407) 679-9017

CIRCLE 355 ON READER SERVICE CARD

ELENCO • HITACHI • B&K PRODUCTS GUARANTEED LOWEST PRICES

**AFFORDABLE - HIGH QUALITY
2 YEAR WARRANTY**



STANDARD SERIES
S-1325 25MHz \$349 S-1340 40MHz \$495
S-1365 60MHz \$849

- Features:
- High Luminance 6" CRT
 - 1mV Sensitivity
 - X-Y Operation
 - Voltage, Time, & Frequency differences displayed on CRT thru the use of cursors (S-1365 only)
 - Plus much, much more
 - TV Sync
 - 2 x 1, x10 Probes
 - Complete Schematic
 - Frequency differences displayed on CRT thru the use of cursors (S-1365 only)

ELENCO OSCILLOSCOPES



DELUX SERIES
S-1330 25MHz \$449 S-1345 40MHz \$575
S-1360 60MHz \$775

- Features:
- Delayed Sweep
 - Automatic Beam Finder
 - Z Axis Modulation
 - Built-in Component Test
 - Plus all the features of the "affordable" series
 - Dual time base
 - Illuminated internal grid

Hitachi Compact Series Scopes

V-212 - 20MHz Dual Trace	\$425
V-525 - 50MHz, Cursors	\$1,069
V-523 - 50MHz, Delayed Sweep	\$995
V-522 - 50MHz, DC Offset	\$975
V-422 - 40MHz, DC Offset	\$949
V-222 - 20MHz, DC Offset	\$695
V-660 - 60MHz, Dual Trace	\$1,375
V-665A - 60MHz, DT, w/cursor	\$1,449
V-1060 - 100MHz, Dual Trace	\$1,549
V-1065A - 100MHz, DT, w/cursor	\$1,695
V-1065 - 100MHz, DT, w/cursor	\$2,125

B&K OSCILLOSCOPES

2120 - 20MHz Dual Trace	\$389
2125 - 20MHz Delayed Sweep	\$539
1541B - 40MHz Dual Trace	\$749
2160 - 60MHz Dual Trace, Delayed Sweep, Dual Time Base	\$949
2190 - 100MHz Three Trace Dual Time Base, Delayed Sweep	\$1,379
2522A - 20MHz / 20MS/s Storage	\$669

Digital Multimeter EDM-438 \$175.00 Almost every feature available Bargain of the decade	Digital Multimeter DVM-538 \$39.95 11 Functions with Case	Digital Capacitance Meter CM-1555 \$49.95 • Measures capacitors from .1pf to 20,000pf • 3-1/2 Digit LCD readout with unit indicator	Digital LCR Meter LCR-600 \$79.95 • 3-1/2 Digit LCD Display • Inductance: 1pf to 200H • Resistance: 1Ω to 20MΩ • Capacitance: 1pf to 200μF	Function Generator FG-601 \$149.95 Square, triangle sine wave. Freq range 0.1Hz to 2MHz
--	--	---	--	---

3-3/4 Digit Multimeter BK-390 \$139.00 • 0.1% DCV acv • Analog bar graph • Automatic ranging • 4,000 count LCD display • Capacitance mea. • Temperature probe	Digital Multimeter Kit with Training Course By Elenco M-2665K \$49.95 • Full function 34 Ranges • Extra large display • Ideal school project M-2661 (Assembled) \$55.00	Frequency Counter F-1225 \$225.00 • 8 Digit LED display • Wide measuring range • High sensitivity • Data hold function • Input impedance 1MΩ or 50Ω • 10:1 Input attenuation function	FLUKE MULTIMETERS (All Models Available Call) <table border="0"> <tr> <td>Scopemeters</td> <td>79 Series</td> <td>\$89.95</td> </tr> <tr> <td>Model 93</td> <td>Model 701</td> <td></td> </tr> <tr> <td>Model 95</td> <td>Model 701</td> <td>\$159.95</td> </tr> <tr> <td>Model 97</td> <td>Model 771</td> <td>\$175.00</td> </tr> <tr> <td>10 Series</td> <td>Model 701</td> <td>\$175.00</td> </tr> <tr> <td>Model 10</td> <td>80 Series</td> <td>\$289.00</td> </tr> <tr> <td>Model 12</td> <td>Model 87</td> <td></td> </tr> </table>	Scopemeters	79 Series	\$89.95	Model 93	Model 701		Model 95	Model 701	\$159.95	Model 97	Model 771	\$175.00	10 Series	Model 701	\$175.00	Model 10	80 Series	\$289.00	Model 12	Model 87	
Scopemeters	79 Series	\$89.95																						
Model 93	Model 701																							
Model 95	Model 701	\$159.95																						
Model 97	Model 771	\$175.00																						
10 Series	Model 701	\$175.00																						
Model 10	80 Series	\$289.00																						
Model 12	Model 87																							

FM Receiver Kit & Training Course \$44.95 AR2N6 Ideal training aid for beginners Makes it fun & easy to learn about amateur radio • Covers both 2 meter (144-148MHz) and 5 meter (35-40MHz) FM • Dual conversion superhetrodyne	Butane Soldering Iron ISOTIP #7980 Two tools in one! Perfect, portable tool for hobbyists and technicians \$24.95	60 Hertz EMF Probe MF \$89.95 Works with any DMM
---	--	--

Telephone Kit PT-223K \$14.95 Available Assembled PT-223 \$15.95	Function Generator Blox #9000 By Elenco \$29.95 Kit \$26.95 Sine, Triangle, Square wave	Learn to Build and Program Computers with this Kit MM-8000 By Elenco \$129.00 From scratch you build a complete system. Our Micro-Master trainer teaches you to write into RAMs, ROMs and run a 8085 microprocessor, which uses similar machine language as IBM PC.	Electronic Tool Kit TK-1000 \$39.95 A professional organizer tool kit at affordable prices. Includes 25 high quality tools in a high impact carrying case which includes a pocket for meter.	Digital/Analog Trainer Complete Mini-Lab For building, Testing, Prototyping Analog and Digital Circuits XK-525 \$159.95 KR XK-525K \$129.95 Elenco's trainer is designed for school projects, with 4 built-in power supplies, includes a function generator with continuously variable, sine, triangle, square wave forms. All power supplies are regulated and protected against shorts. The case can include a full line of tools and meter of your choice.
--	--	---	---	--

WE WILL NOT BE UNDERSOLD
UPS SHIPPING: 48 STATES \$5, OTHERS CALL
IN RES AND PAY TAX
PROBES INCL. ALL SCOPES & METERS

C&S SALES INC.
1245 ROSEWOOD, DEERFIELD, IL 60015
FAX: 708-520-0095 • (708) 541-0710

15 DAY MONEY-BACK GUARANTEE
FULL FACTORY WARRANTY
WRITE FOR FREE CATALOG

CIRCLE 184 ON READER SERVICE CARD

1B/DJ6SI was on the air for a while, and I provided Eric N1CYA with the info on getting 1B license procedure, his 1B/N1CYA operation pending in April. By the way, I would not recommend trying a 1B operation without a license. I surely was glad I had mine when the local police came and asked about my antenna.

Upon my return home, I read that Cliff KR4M had tabled his petition in favor of TRNC recognition by DXCC, as I found out later, for very unfortunate personal reasons. After discussing this matter with Cliff, I filed my own petition, which was received by DXCC on 2-2-94.

Recently I made presentations to DX Associations of six different states (TX, OK, KS, MO, IA, MN), at which I showed the slides of my 1B operation and discussed my petition. The reaction was overwhelmingly positive; a few questions were asked, but no opposition was encountered. I do acknowledge, however, the existence of some opposition among hams against TRNC recognition by DXCC and I will keep addressing their arguments as soon as I become aware of such.

I am glad to see that even the opposition agrees that DXCC criteria, like "... society united together, occupying a definite territory and having a definite population, politically organized and controlled under one exclusive regime, maintaining a standing army, customs, currency and stamps" are met. The following is my response to the arguments I have come across lately:

•Authorized Use of ITU-assigned Call Sign Prefixes: After declaring its independence, TRNC was left without ITU-assigned prefixes, since the Republic of Cyprus (South) kept total control over their usage. When, almost 10 years after TRNC declaration, a law authorizing amateur radio in TRNC was passed, the Telecommunication Administration of TRNC, to avoid any additional problems with their southern neighbor, adopted 1B as a prefix, not used by

or assigned to any country. Several cases set a prerogative for this, such as 1A0, 1S, S0, FS, all of which are, by the way, recognized by DXCC as separate countries.

•The ability of "engaging in foreign relations—including capacity to carry out its obligations under international law and applicable international agreements." TRNC is actively repaying its foreign aid loans (annual payments balance rise is about 14%), and has trade relations with more than 60 countries, including U.S.A., Japan, and UK. It stimulates foreign trade by liberal tax concessions, establishing a free port zone in Famagusta, free exchange of foreign currency/stock, and controls foreign investment policy. It provides (and pays for) postal service to any country, telephone and other communications all over the world, and is an observer member of International Islamic Association.

•Low level of diplomatic recognition is the result of failure of the U.N.'s inconsistent attempts to resolve the Cyprus problem in more than three decades, and should not be held against TRNC. Despite the official diplomatic recognition by Turkey only, acting as a responsible member of the international community, TRNC supports representations in 10 countries, including Western Europe, Japan, and the U.S.A., where it has two consulates, one of which is accredited to the U.N. in New York. From the DXCC's standpoint, the fact that North Korea is, out of the whole Western Bloc, recognized by Sweden only, did not make it ineligible. Other examples may be given.

•Continued talks about reunification" between Greek and Turkish Cypriots are purely symbolic. These talks, conducted through the U.N., have not brought any progress since 1975, and are not expected to bring any progress in the future. This opinion is shared by TRNC Consulate in Washington, D.C. The talks are basically deadlocked because the U.N., on one hand, recog-

nizes the existence of TRNC and the rights of Turkish Cypriots, but on the other hand, treats the Republic of Cyprus (Greek South) Government, as the sole government of the island, which, in turn, fails to acknowledge the rights of Turkish Cypriots. Talks on reunification of Germany took close to 40 years. DXCC did, however, count German Democratic Republic as a separate for over 17 years prior to reunification, while the talks were going on. The important difference is that the division of Germany was not based on ethnic differences and was not initiated by any group of German people on either side. The chances of the reunification of the two ethnic communities of Cyprus, which have lived separately on the island for many centuries, are way less than the chances of reunification of Bosnia and Serbia.

And, last but not never least, I would like to stress that, after my recent visit to TRNC, I strongly feel that this country does deserve DXCC recognition. (Igor Zadorov KU0J, 5980 Anna Ave. #308, Minneapolis MN 55432)

AUSTRALIA

David Horsfall VK2KFU
PO Box 257
Wahroonga NSW 2076
Australia

In my last news from Australia, I mentioned how the Spectrum Management Authority (SMA) was overhauling the licensing scheme (for all classes—business, Amateur, and CB) in Australia. Combined with the long-awaited changes to the Amateur Regulations scheduled for the end of this year, we can look forward to some interesting times (remember that Chinese curse?).

The new Amateur regulations, foreshadowed almost two years ago and delayed for one reason or another, will mean greater deregulation for Australian Amateurs, and amongst other things will allow Novices to use packet radio (currently they cannot), permit the

codeless "Limited" Amateur to use 10m FM, and create a "Codeless Novice" class of licence. These changes are expected to create an influx of people into the Amateur Radio Service, which is languishing for lack of numbers; youngsters these days are more interested in playing with their computers than talking to the other side of the world.

With these changes comes greater responsibility, and there are moves afoot to make the Amateur responsible for resolving all cases of interference; a spectrally-pure signal will no longer be a defence, and as Australia has comparatively lax EMI standards, it has become a dumping ground for the rest of the world.

I also mentioned in the last column the madness that seems to have infected the VK2 Division of the Wireless Institute of Australia (WIA). Sanity was expected to have returned at the Annual General meeting, but no—the election outcome was successfully challenged on the grounds that it was not conducted according to the Articles of Association; the Returning Officer was not permitted to conduct the ballot, proxies were not authenticated, and several dubious Reports to Members and "How to Vote" guides were circulated. At the time of writing, an amicable solution to this crisis is being sought; one that does not involve going to court and subsequent legal bills. A fresh election, conducted by a neutral third party, would appear to be the preferred option. In the meantime, it would appear that the only person who has any authority within the VK2 Division is the paid Administrative Secretary, as it is generally agreed that a new Council was not elected after all.

Cheers for now. Those with access to packet or Internet can contact me as "VK2KFU @ VK2AAB.SYD.NSW.AUS.OC" and "dave@esi.COM.AU" respectively. I'm not sure whether all messages are being delivered to my packet address, so if you don't get a reply, it means that I didn't see it.

THE FAMED 2 METER
Also the ultimate for scanners cbb to 1300 MHz.

A. S. A. 9209
+9 db Co-Linear "MultiWave" Base Station Double 5/8 over 1/4 wave delivers up to +9 db gain. All fiberglass & solid aluminum construction. Fits masts up to 1-1/2". 2 Meter Base Station 10' length.

\$36.73
+ \$6.00 S&H
(SC RES. 5% SALES TAX)
CHECK IN ADVANCE OR C.O.D.
ALSO AVAILABLE IN 220 & 440

ASA
"Service is the Reason For Our Success"

Model 9209
+9db

Tel: (803)293-7888 P.O. Box 3461
Watts: 1-800-722-2881 Myrtle Beach, SC 29578

Presenting
**THE K1FO 12 ELEMENT
144 MHz YAGI**

Model: FO12-144

Amateur Net
\$142.50

ELECTRICAL SPECIFICATIONS:
Measured gain 12.5 dBS
E-Plane beamwidth 34 deg
H-Plane beamwidth 37 deg
Sidelobe attenuation
1st E-Plane -18 dB
1st H-Plane -15 dB
SWR 1.13:1 typical
F/B ratio 22 dB
Maximum power 2000 Watts
Impedance 50 ohm

MECHANICAL SPECIFICATIONS:
Length 178 in.
Boom 1.375" 6061 T-6 Aluminum
Elements 1/4" Aluminum rod
Wind survival 120-MPH
Mast up to 2" diameter
Element Insulators Black Delrin
All Stainless Steel Hardware
Coax connector N-type
Weight 11 lb

ALSO AVAILABLE HIGH PERFORMANCE YAGI ANTENNAS FOR
6 METERS, 2 METERS, 222 MHz, 432 MHz
POWER DIVIDERS STACKING FRAMES
Tropo, Weak Signal, ATV, EME, OSCAR, FM, Packet, Contest

Add \$6 UPS S/H for each antenna, \$9 west of Mississippi
PA residents add 6% state sales tax.
CALL OR WRITE FOR OUR NEW CATALOG

RUTLAND ARRAYS
1703 Warren St. • New Cumberland, PA 17070
Information (717) 774-3570 9pm-10pm EST
Orders Phone/FAX 1-800-536-3268
DEALER INQUIRES ARE INVITED

COAX-SEAL
"The Original Coax Sealant"

The Only Material That Will Adhere to Polyvinyl or Vinyl Outer Coax Jackets!

- Forms around and seals odd-shaped fittings.
- Non-contaminating and non-conductive.
- Wide ambient temperature range (-30° F to +180° F).
- Stays flexible for years insuring moisture-proof connections.
- Reusable—quick disconnection and resealing with same material.
- A must for satellite TV—microwave work.
- Hundreds of uses.
- Moistureproofs all connections.

EVERY LNB AND COAXIAL CONNECTOR NEEDS COAX-SEAL
Trial packet for 4 connectors—\$1.00 ppd.

UNIVERSAL ELECTRONICS, INC.
4555 Groves Road, Suite 12 Columbus, OH 43232
Phone (614) 866-4605 • FAX (614) 866-1201

READER SERVICE

73 Amateur Radio Today

Subscribe now!

☐ Yes! Send me 12 issues of 73 Magazine at the low rate of \$19.97 (Save 43% off the cover price.) ☐ Bill me

☐ AMEX ☐ MC ☐ VISA ☐ Payment Enclosed

Card# _____

Exp. Date _____

AUGUST 1994

Name _____

Address _____

City _____ State _____ Zip _____

Canada add \$7.00 plus \$1.40 GST;

Foreign add \$19.00 surface, \$42.00 airmail.

This card valid until September 30, 1994.
In the U.S. and possessions.

You make the 73 supporting advertisers very happy when you're interested in them.

... Wayne

1	2	3	4	5	6	7	8	9	10	201	202	203	204	205	206	207	208	209	210
11	12	13	14	15	16	17	18	19	20	211	212	213	214	215	216	217	218	219	220
21	22	23	24	25	26	27	28	29	30	221	222	223	224	225	226	227	228	229	230
31	32	33	34	35	36	37	38	39	40	231	232	233	234	235	236	237	238	239	240
41	42	43	44	45	46	47	48	49	50	241	242	243	244	245	246	247	248	249	250
51	52	53	54	55	56	57	58	59	60	251	252	253	254	255	256	257	258	259	260
61	62	63	64	65	66	67	68	69	70	261	262	263	264	265	266	267	268	269	270
71	72	73	74	75	76	77	78	79	80	271	272	273	274	275	276	277	278	279	280
81	82	83	84	85	86	87	88	89	90	281	282	283	284	285	286	287	288	289	290
91	92	93	94	95	96	97	98	99	100	291	292	293	294	295	296	297	298	299	300

101	102	103	104	105	106	107	108	109	110	301	302	303	304	305	306	307	308	309	310
111	112	113	114	115	116	117	118	119	120	311	312	313	314	315	316	317	318	319	320
121	122	123	124	125	126	127	128	129	130	321	322	323	324	325	326	327	328	329	330
131	132	133	134	135	136	137	138	139	140	331	332	333	334	335	336	337	338	339	340
141	142	143	144	145	146	147	148	149	150	341	342	343	344	345	346	347	348	349	350
151	152	153	154	155	156	157	158	159	160	351	352	353	354	355	356	357	358	359	360
161	162	163	164	165	166	167	168	169	170	361	362	363	364	365	366	367	368	369	370
171	172	173	174	175	176	177	178	179	180	371	372	373	374	375	376	377	378	379	380
181	182	183	184	185	186	187	188	189	190	381	382	383	384	385	386	387	388	389	390
191	192	193	194	195	196	197	198	199	200	391	392	393	394	395	396	397	398	399	400

Where did you get this copy of 73?

999 ☐ newsstand 998 ☐ subscription

FREE INFORMATION READER SERVICE CARD

Reader Service: To Receive more information on the products advertised in this issue of 73, circle the appropriate number. Please allow 6 weeks for processing of inquiry. Offer valid in the U.S. and possessions for a limited time only.

B9408SS4

Radio Fun

Subscribe Now!
12 issues for \$12.97

☐ **YES! Send me one year (12 issues) of
Radio Fun for the low price of \$12.97**

For instant service call toll free 1-800-257-2346

Name _____

(Please Print)

Call _____

Address _____

City _____

State _____

Zip _____

Charge my: ☐ MC ☐ Visa ☐ AMEX ☐ Bill Me ☐ Payment enclosed

Card number _____

Exp. date _____

Class License _____ Year Licensed _____ 73 Subscriber _____ QST Subscriber _____ CQ Subscriber _____

Canada add \$8. Foreign add \$12 surface, \$36 airmail. Newsstand rate \$24. Basic subscription rate \$14.97

08H



Place
Stamp
Here

73 Amateur Radio Today

READER SERVICE MANAGEMENT DEPARTMENT
PO BOX 1928
RIVERTON NJ 08077-7528



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES


BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT # 211 RIVERTON NJ

POSTAGE WILL BE PAID BY ADDRESSEE

Radio Fun

PO Box 4926
Manchester NH 03108-9839



ADVERTISERS

R.S.#	page	R.S.#	page	R.S.#	page	R.S.#	page
• A & A Engineering.....	40	186 Coaxial Dynamics.....	85	• Kenwood USA Corporation.....	CV4	34 Ramsey Electronics.....	19*
• A.S.A.....	80	156 CompuNet Corporation (C.P.I.)	79	197 Lathrop Publications, Inc.....	43	254 Ross Distributing.....	78
• A.S.A.....	91	10 Communications Specialists, Inc.....	39	234 Lentini Communications.....	43	• RT Systems.....	36
351 Absolute Value Systems.....	17	356 Communication Electronics, Inc.....	23	243 Luke Company.....	17	71 Rutland Arrays.....	80
164 Ace Communications of Indianapolis.....	92	276 Computer Aided Technology.....	93	233 Maingate Resources.....	78	• SAMS.....	36
• Advanced Electronic Applications.....	9*	181 Digital Communications.....	68	86 MFJ Enterprises.....	11	36 Scrambling News.....	94
149 Advantage Instruments Corporation.....	5	13 Doppler Systems.....	88	86 MFJ Enterprises.....	33	167 Sescom, Inc.....	92
281 Agrelo Engineering.....	91	114 E. H. Yost.....	77	160 Micro Computer Concepts.....	55	188 SGC Inc.....	75
194 All Electronics Corporation.....	25	8 Eltronics.....	95	144 Micro Control Specialties.....	83	250 Software Systems.....	71
• Alphasab.....	92	75 Fair Radio Sales.....	36	30 Micro Video Products.....	43	244 Software Systems.....	63
• Amateur Radio Excellence	17	118 Flycraft.....	17	114 Mr. Nicad.....	77	69 Spectrum Electronics.....	63
• Ampire, Inc.....	77	251 Flycraft.....	78	240 MoTron Electronics.....	58	183 Spectrum International.....	85
113 Amsoft.....	40	329 For Hams Only.....	68	64 Mouser Electronics.....	63	247 Startek.....	1
380 Antennas West.....	37	169 G & G Electronics.....	39	223 National Amateur Radio.....	94	• Tejas RF Technologies.....	94
336 Antennas West.....	56	• Gap Antenna Products.....	56	54 NCG.....	2	• The Ham Center.....	77
107 Antennas West.....	91	193 GGTE.....	37*	1 Number One Systems Ltd.....	83	384 The Ham Contact.....	64
135 Antennas West.....	92	338 Global Upgrades.....	94	• O.F.S. Weatherfax.....	95	384 The Ham Contact.....	56
296 Antennas West.....	93	280 Grove Enterprises.....	61	• P.C. Electronics.....	75*	269 Tigertronics.....	71
89 Antennas West.....	94	348 Grove Enterprises.....	86	• P.C. Electronics.....	83*	374 TNR.....	93
332 Antennas West.....	95	• Ham Radio & More.....	27	178 Pacific Cable Company, Inc.....	59	11 Transel Technologies.....	56
80 Arrow Antenna.....	95	78 Hamsure.....	79	233 Packet Power.....	78	22 Tri-Ex.....	42
16 Astron Corporation.....	13	• Hamtronics, Inc.....	7	321 Patcomm.....	15	32 Universal Electronics.....	80
• Azden Corporation.....	37	345 HamWindows.....	59	339 Pauldon.....	42	• Universal Radio.....	79*
21 B & B, Inc.....	78	345 HamWindows.....	39	68 Periphex.....	56	• Vallarta Hamfest '94.....	87
41 Barry Electronics Corporation.....	31	187 Harlan Technologies.....	17	198 Personal Computer Repeater Controller.....	92	• Vanguard Labs.....	93
42 Bilal Company.....	93	355 Harrington Software.....	79	• Personal Database.....	93	259 Versatel Communications.....	81
56 Buckmaster Publishing.....	94*	87 High Sierra.....	95	249 Phillips Industries, Inc.....	59	104 Vis Study Guides, Inc.....	81
168 Buckmaster Publishing.....	37*	179 Icom.....	CV2*	311 Pioneer Hill Software.....	24	191 W & W Associates.....	89
7 Buckmaster Publishing.....	92*	77 Interflex Systems.....	17	49 Polyphaser.....	28	20 Wolfe Communications.....	81
• Butternut Electronics Company.....	70	42 Isotron.....	93	• Pride Tubes	34	• Yaesu Electronics Corporation.....	CV3
222 Byers Chassis Kits.....	40	55 J-Com.....	59	145 QSO Software.....	75	• ZD Engineering.....	59
184 C & S Sales, Inc.....	79	26 J.M.S.....	79	26 Quantum Instruments.....	67	268 Zero Surge Inc.....	63
• CABLE X-PERTS, INC.....	41	228 Jade Products.....	17	257 Quorum Communications.....	21		
239 Cam Lazercut Signs.....	59	285 JPS Communications.....	29	153 Radio City.....	45-52*		
• CB City International.....	91	• K-Comm.....	77	58 Radio Engineers.....	36		
265 Chipswitch.....	59	2 Kawa Productions.....	55	• Radio Fun.....	81		
		151 KDC Sound.....	59	• RAI Enterprises.....	67		

Bold Listings are 73's New Advertisers This Month.

*Advertisers who have contributed to the National Advisory Committee (NIAC).

Radio Fun

"The beginner's guide to the exciting world of amateur radio."

Radio Fun is packed full of information to help you get more fun out of amateur radio. Basic "how-to" articles will get you up and running on packet, ATV, RTTY, DXing, and the dozens of other activities that make amateur radio such a great hobby. You'll get equipment reviews geared toward the newcomer. We'll help you upgrade to a higher class license with monthly columns

designed to teach you what you need to know in a fun and exciting way. You'll find it all, and more, in the pages of *Radio Fun*.

Don't wait another minute. Subscribe today for only \$12.97 for one year. That's 12 issues of the only ham magazine that is geared especially for the newcomer, or any ham who wants to get more fun and excitement out of amateur radio — *Radio Fun*!

UHF REPEATER

Make high quality UHF repeaters from GE Master II mobiles!

- 40 Watt Mobile-Radio..... \$199
- Duplexing and tuning information..... \$12
- Version without radio..... \$40

Versatel Communications
 Orders 1-800-458-5548 For info. 307-266-1700
 P.O. Box 4012 • Casper, Wyoming 82604

CIRCLE 259 ON READER SERVICE CARD

• BUY • SELL • TRADE •

ALL BRANDS OF 2-WAY RADIOS & ACCESSORIES

Call or Write for a Current Flyer

(406)252-9220
 1113 Central Ave.
 Billings, MT 59102

C.W. WOLFE COMMUNICATIONS

CIRCLE 20 ON READER SERVICE CARD

QUICK, EASY, & COMPACT

Flash cards "NOVICE thru EXTRA" theory Key words underlined. Over 4000 sets in use! For beginner, OMs, XYLs & kids.

NOVICE \$11.95
 TECHNICIAN \$10.95
 GENERAL \$9.95
 ADVANCED \$15.95
 EXTRAS \$14.95
 Shipping 1-\$3.00
 2 or more \$4.00
 CLUB DISCOUNTS

VS STUDY CARDS
 P.O. BOX 17377
 HATTIESBURG, MS 39404

Order Today! from

CIRCLE 104 ON READER SERVICE CARD

12 issues for only \$12.97

1-800-257-2346

☐ **YES! Sign me up right now!** 12 issues of *Radio Fun* for \$12.97.

NAME _____ CALL _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Check _____ MC _____ Visa _____

CARD # _____ EXPIRES _____

Class License _____ Year Licensed _____ 73 Subscriber _____

QST Subscriber _____ CQ Subscriber _____

Mail to: *Radio Fun*, P.O. Box 4926, Manchester, NH 03108
 [Or Call 800-257-2346 (in NH Call 625-1163), FAX: 603-669-2835]

Canada add \$7.00 plus .70 GST. Foreign add \$12.00 surface, \$36.00 airmail. Newsstand Rate \$18.00. Basic subscription Rate \$14.97.

OBE

NEVER SAY DIE

Continued from page 4

me into amateur radio was *QST* magazine. Our school library had a subscription, so when I wanted to know more about amateur radio I went to the library and started reading. It sounded like fun, so I joined the school radio club, where I was able to get on the air. The club station was W2ANU on 160 meters. Well, that was about the only voice band Class B amateurs could use, and most of us were Class B back then. This was in 1937.

Will today's youngsters be able to go to their school or public library and find out what's happening in amateur radio? That's what got me going, so check it out and see if your local school libraries have subscriptions to *73* and *Radio Fun*. They probably don't unless you've donated the subscriptions. So I'll tell you what, if you'll do your bit to help interest youngsters in amateur radio by springing for a combo subscription for *73* and *Radio Fun* for your local school and your local public library, I'll go part way with you. You might even want to come off as Daddy Warbucks by giving subscriptions for your radio club library too. Subscriptions to the two publications would normally cost \$33, but if you send me \$25 we'll send the libraries you select a subscription to both magazines with your compliments.

Here's your chance to help amateur radio recruit new hams. Your \$25 can do a whole lot of good. Send your subscriptions to: Library Special, *73* Magazine, Peterborough NH 03458-1107. Cash, check, or credit card. Or call us at 603-924-0058.

Book Bargain

If you ever find yourself short of things to talk about on the air, you could do worse than get a copy of kindly old Uncle Wayne's *Declare War* book. It's time to put the few copies we've got left in the warehouse on sale.

Book? Okay, in case you are either a newcomer to *73* or have advanced brain rot, here's what happened. Coming on to three years ago, when the recession was at its worst, the governor of New Hampshire, unable to think of anything much to do about the situation, got the Legislature to authorize an Economic Development Commission to help him cope with the disaster. Yes, he appointed me to the Commission, even though I warned him that I would be at the least a royal pain by insisting that we accomplish something.

It didn't take me long to discover that most of the very important businessmen and even more important politicians on the Commission were too busy with other things to devote much time or thought to the job. So, for over a year, I attended Commission meetings and endless subcommittee meetings. I sent reports to the Commission members of what I was finding as far as our problems were concerned, and then I suggested inexpensive solutions. A few members were

enthusiastic about my reports. The rest I didn't hear from. When I saw them or called them and asked what they thought they said that, well, ahem, they hadn't had time to read them yet.

So I reprinted my reports in book form and sent it to the Legislature, most of whom didn't read it either. I wasn't set up to handle national distribution, so I settled for getting the book into New Hampshire bookstores. It sold well and brought me many compliments. No negatives from anyone yet. I've advertised it in *73* and sold several hundred copies, again getting many nice letters commenting on my approach to solving our more serious national problems.

Now I'd like to clean out the copies that are left, so instead of the \$13 published price (plus \$3 shipping and handling), I'll send it to you for \$10 postpaid.

So what's in the book? Well, there's a wealth of entrepreneurial ideas. When I took a look at the major problems facing New Hampshire and America, I looked for creative solu-

keting, plus articles in *Folio, Inc.*, and so on, has been a series of consulting gigs. While there are as many problems as there are businesses, I found some that almost all businesses had several in common.

The three almost universal problems are (a) lousy PR, (b) lousy advertising, and (c) lousy direct mail follow-up on advertising and promotion. Why the owner and CEO of a company would go to all the expense and trouble of developing a really good product, only to kill it with lousy marketing, is difficult to understand. I guess it comes down to either remarkable stupidity, or else a lousy education in the fundamentals of business.

What's more basic to selling a product than advertising? Yet there are few schools teaching the subject. Worse, all too many of the big ad agencies don't seem to have anyone around who's ever studied the fundamentals. When you consider that a good ad can easily sell 10 times as much product as a crummy ad, this is not something you want to trust to a high-school

same increase in sales of a product as a full-page ad. A good product review will sell as much as four full pages of ads.

If you use the normal magazine guideline, an ad, if it is any good, and is in a magazine reaching good potential buyers, should sell at least 10 times the cost of the ad in product. Thus, if a page ad in a magazine costs \$8,000, an advertiser would expect to get at least \$80,000 in sales as a result. Now, if we figure that a company has at least four new products a year and thus is able to get four new products releases printed in a magazine, plus maybe two product reviews, that should provide the same sales as running a dozen full-page ads—so we're talking about an additional \$1 million in sales, all from absolutely free advertising!

In the ham radio field, where ads are more like \$1,500 a page, that's still an added \$180,000 in sales—if you know how to write the new products releases and get them published.

To help business people take advantage of the power of promotion I made a one-hour video explaining exactly how to do it—giving away some secrets that have made a few other publishers furious. I've been selling the video for \$100 with a money-back guarantee. No one's asked for their money back yet, and I've sold several hundred of them. They're even being used by a couple of colleges as part of their advertising courses.

Now I'd like to make this video available to interested *73* readers at a big discount. How about \$40 plus \$3 shipping? That's my \$1 Million Video. Send a check or your credit card number to Uncle Wayne's Bookshelf, Peterborough NH 03458-1107.

It really doesn't make much difference what kind of a business you are in—PR is an inexpensive and very effective way to generate sales. But, you know, not one company in a thousand knows how to get all this free advertising. Maybe one in ten thousand. And that includes some very large, but not too brilliantly run, companies.

Is it worth \$40 to you to generate a few thousand dollars in extra sales? Probably not. Too much trouble. Yawn.

With some encouragement I'll do a video on how to double your business with a better follow-up on reader's service cards. Or at least I'll write a book. A video would be better so I could show you how stupid some manufacturers are in preparing their literature. You won't believe it if I don't show you.

Chicken Little

When one of the non-publishing WGI divisions managed, through spectacularly poor management, to rack up unexpected losses, I knew I'd be able to count on at least one Chicken Little to blow this out of proportion. I was not disappointed. Fred W5YI, who seems unable to keep himself from avoiding any such opportunity, stepped right in with his appropriately-colored pink sheet.

The only way I'm able to "run" so

"A simple new product release in a magazine will, on the average, result in about the same increase in sales of a product as a full-page ad."

tions. Not having seen socialism succeed anywhere in the world in history, I've tended to avoid calling on the government for intelligence or answers.

What kind of problems? Well, little things like our high crime rate and how to tackle it. The high cost of prisons and shortage of prison space—the welfare mess—our rotten school system—the high cost of a college education—how we can cut the bloated government bureaucracy in half in three years—how we can cut taxes and get rid of the deficit—solving the drug problem—building a high-tech workforce—ending poverty—making Congress honest. Things like that.

Sure, I've written about some of these things in my editorials, but the book has 360 pages of my findings and ideas. You may find this difficult to believe, but I even express some opinions—and I'm well known for being almost totally unopinionated. I think you'll like my proposal which will provide unlimited prison space for a fraction of what we're paying now and result in re-educated and motivated prisoners. I think you'll like my college plan which will provide free tuition and a three-year degree.

Send or call in your order (603-588-2105) to Uncle Wayne's Bookshelf, Peterborough NH 03458-1107. This book is so good I can almost guarantee you'll like it so much you'll be reading it over the air. If you paid the full bore I would guarantee it.

One Million Dollars?

One result of my offering advice in my business publications such as *Music Marketing*, *Music Retailing*, *Ham Radio Marketing*, *Microcomputer Mar-*

ketplace. That's like a manufacturer letting a rig be designed by a Novice.

Since there already are books and courses available for anyone interested in learning about advertising, and I'm not interested in writing something that is already available elsewhere, I haven't yet written an advertising primer. Maybe one of these days.


When I started my first business, manufacturing loudspeakers, I quickly discovered that I couldn't depend on agencies for anything beyond doing the mechanicals for my ads. I'd have to design and write them. I bought some books, which were OK, but not great. One of the best moves of my life was to sign up for a course in advertising with the Advertising Club of New York. Their lecture series was superb. They not only covered how to design and write ads, but how to handle ads in magazines, newspapers, radio, TV, billboards, posters, and even matchbook covers. Changed my life.

Promotion!

The easiest way for any company to generate more sales without a lot of expense is to go the promotion route. There's a lot to learn about this. There are obviously some sneaky tricks the professionals use to make sure their material gets before the public. As a publisher of some of the larger magazines in the country, I knew that not more than a handful of experts had even an inkling of how to get new products releases or product reviews published.


From my viewpoint, most companies are throwing away sales. A simple new product release in a magazine will, on the average, result in about the

PCB / Schematic CAD - from \$195




EASY-PC - For single sided and multilayer boards to 17"x17". Phenomenally fast and easy to use. Over 18,000 copies in use worldwide. **EASY-PC Professional** for boards up to 32" x 32" at .001" resolution, 16 layers. Schematic capture and netlist extraction - integrates seamlessly with **PULSAR** and **ANALYSER III**. Runs on **PC/XT/AT/286/386/486** with EGA or VGA displays.

Logic Simulation - from \$195



PULSAR and **PULSAR Professional** - Full featured digital logic simulators. Allow you to test your designs quickly and inexpensively without the need for sophisticated test equipment. **PULSAR** can detect the equivalent of a picosecond glitch occurring once a week! Runs on **PC/XT/AT/286/386/486** with EGA or VGA displays.

Analogue Simulation - from \$195



ANALYSER III and **ANALYSER III Pro**. Powerful linear circuit simulators have full graphical output, handle R's, L's, C's, Bipolar Transistors, FET's, Op-Amp's, Tapped Transformers and Transmission Lines etc. Plots Input and Output Impedances, Gain, Phase and Group Delay. Covers 0.001 Hz to >10GHz. Runs on **PC/XT/AT/286/386/486** with EGA or VGA displays.

For information write, fax or call:


Number One Systems

REF: 73, 1795 Granger Ave., Los Altos, CA94024
(415) 968 9306

VISA and MasterCard welcome.

CIRCLE 1 ON READER SERVICE CARD

AMATEUR TELEVISION

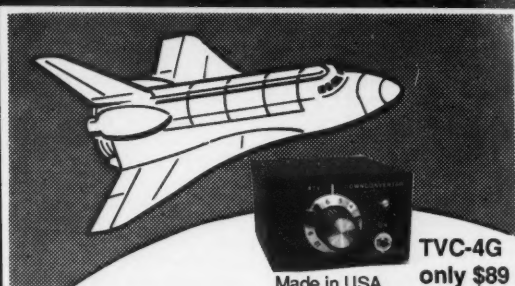

TVC-4G
only \$89

Made in USA

SEE THE SPACE SHUTTLE VIDEO

Many ATV repeaters and individuals are retransmitting Space Shuttle Video & Audio from their TVRO's tuned to Spacenet 2 transponder 9 or weather radar during significant storms, as well as home camcorder video. If it's being done in your area on 420 - check page 501 in the 94-95 ARRL Repeater Directory or call us. ATV repeaters are springing up all over - all you need is one of the TVC-4G ATV 420-450 MHz downconverters, add any TV set to ch 2, 3 or 4 and a 70 CM antenna (you can use your 435 Oscar antenna). We also have ATV downconverters, antennas, transmitters and amplifiers for the 400, 900 and 1200 MHz bands. In fact we are your one stop for all your ATV needs and info. We ship most items within 24 hours after you call. **Hams, call for our complete 10 page ATV catalogue.**

(818) 447-4565 m-f 8am-5:30pm pst.

Visa, MC, COD

P.C. ELECTRONICS

Tom (W6ORG)

2522 Paxson Ln Arcadia CA 91007

Maryann (WB6YSS)

here is the next generation Repeater

MARK 4CR

The only repeaters and controllers
with REAL SPEECH!

No other repeaters or controllers match Mark 4 in capability and features. That's why Mark 4 is the performance leader at amateur and commercial repeater sites around the world. Only Mark 4 gives you Message Master™ real speech • voice readout of received signal strength, deviation, and frequency error • 4-channel receiver voting • clock time announcements and function control • 7-helical filter receiver • extensive phone patch functions. Unlike others, Mark 4 even includes power supply and a handsome cabinet.

Call or write for specifications on the repeater, controller, and receiver winners.

Phone: #(508) 372-3442

FAX: #(508) 373-7304



MICRO CONTROL SPECIALTIES

Division of Kendecom Inc.

23 Elm Park, Groveland, MA 01834

Create messages just by talking. Speak any phrases or words in any languages or dialect and *your own voice* is stored instantly in solid-state memory. Perfect for emergency warnings, club news bulletins, and DX alerts. Create unique ID and tail messages, and the ultimate in a real speech user mailbox — only with a Mark 4.



2 meters **220 440**

CIRCLE 144 ON READER SERVICE CARD

many different businesses without being tied down 24 hours a day is to pick the best managers I can and give them the authority to run them. Most of the time this works out fine, but now and then one screws up—and then of course covers up. In this case it was with the IMPS Manufacturing Division.

This is the Independent Music Producers Syndicate, which has been brokering the manufacture of compact discs for over a thousand independent record companies. The team running it managed to lose a bundle through loose credit policies.

Yes, I should pay more attention, but I had no reason not to trust the creative financial reports I was getting, and I was spending most of my time researching and writing—work which resulted in my *Declare War* book, and a soon-to-be-finished *Declare War II*, or *Son of Declare War*. Plus I was also writing editorials for *73*, *Radio Fun*, *"Cold Fusion"*, *Music Retailing*, and *IMPS Journal*. Getting *"Cold Fusion"* started took extra time too, what with my having to bone up on the latest fundamentals of physics, chemistry, atomic theory, quantum mechanics, and even chaos theory. So I got blind-sided. Hey, I'm only one guy, and I'm old. Say, where'd I put my walker?

Despite Fred's enthusiastic Chicken Little alarms, *73* is doing just fine, thank you, and it's no more for sale than it's ever been. When I found out what was really going on I dumped the CD brokerage business and concentrated our efforts on the cold fusion field, which I'm convinced is going to have more of an impact on the world than any other development in the 20th century. That left me with a warehouse full of CDs to sell to clean up our debts. Fortunately they're all superb music, so we'll be providing some incredible music bargains for anyone who likes music. And if you don't like music, you're a very disturbed person and have no business reading my editorials.

When you break an egg, make an omelet, right? So we're arranging through a liquidator to make this great music available for anyone looking for merchandise to sell at flea markets. Would you believe full-length digitally recorded CD music collections available as low as \$2.65 each in quantity? Tests in New Hampshire flea markets saw these CDs selling like hot cakes at \$4.50, with many entrepreneurs cleaning up \$200-\$300 on a Saturday. For more information on that, check with Buys Inc., Box 184, Andrum NH 03440-0184, 603-588-2105 days, an answering machine at night—or fax 588-3205.

Tesla Symposium, July 21-24

It's in Colorado Springs and there'll be a bunch of hams there, just like last year. I was there and had a great time. I learned a lot and met some wonderfully interesting people. Even better, I bought a ton of great books—many of which I've been reviewing and recommending to you.

The Symposium is at the Sheraton Hotel South, in Colorado Springs. Give

the Tesla Society a call for details: 719-475-0918. Say Wayne sent you. I told you all about this last year, you just didn't pay any attention. If you're interested in weird science, don't miss this one.

And if you find that the Symposium doesn't keep you busy both day and night, you could do worse than drive up to nearby Boulder in the evenings and enjoy the ragtime festival. That's what Sherry and I did every night last year. If we can make it this year, we'll be doing the same. Scott Kirby will be there performing. Say hello to him and be enchanted by his artistry. He's incredible. You'll also enjoy Frank French, another superb performer. Call 303-499-9150 for details.

If Sherry and I can make it all the way from New Hampshire, what's holding you back? Have some fun. And if you can't make it, at least say hello on 14,297 via KC2Q.

Bad Science

The current scientist put-downs of cold fusion remind me of the early days of radio. As you're aware, we started out with spark transmitters. Well, I've donated several early radio books to the Wireless Museum which say that voice could never be transmitted because damped waves could not be modulated. These were, of course, published well after Nicola Tesla had demonstrated voice transmissions. History is packed with such wrong-headed scientific pontifications.

Maybe you've read about the early scientific controversy over the existence of ether. Well, light waves and radio waves had to travel through some kind of a medium, right? Just as sound waves travel through air. But when no one was able to detect the ether, they dismissed it, and moved light through space in photon packets. I guess radio goes in RF packets? Well, somehow it gets there, as do waves of a wide variety of other wavelengths.

So do magnetism and gravity. Gravitons? So now some scientists are re-looking at the ether concept. Maybe "space" isn't nothing after all. And I don't mean the few atoms or molecules of stuff that's floating around out in "empty space."

Are the researchers who are generating "excess" energy somehow tapping into the ether? Well, there are a growing number of scientists who are starting to think more seriously about this. They're calling it "zero point" energy. Everything has to have a name.

Perhaps the mysterious excess energy cold fusion researchers are tapping can be explained in this way. Or maybe there are two possible electron orbits for hydrogen and the excess energy is resulting from changing this orbit. Or who knows?

We know a lot about electricity now. We can measure it, generate it, transport it, store it, and use it. About the only thing we don't know yet is what it is. We can measure gravity, but we don't know much more about it. We don't even know for sure how fast a

"gravity wave" propagates. Speed of light? Instantaneous? We can measure inertia, but what causes it?

So don't tell me about how far along we are in science. And don't tell me what is or isn't possible. And that goes for our most revered and lettered scientists.

I'm hoping that Nova will broadcast either the March BBC or the April CBC documentaries on cold fusion. These programs have embarrassed the hell out of some very important scientists, making them look like idiots. I enjoyed the juxtaposition of the Department of Energy head saying cold fusion is the fiasco of the century against Dr. Fleischmann holding a reactor a little larger than a thermos bottle in his hands which he claims has been generating over 20,000 watts of power continuously. We could use a few more such fiascos.

The AMA Sucks

When I read about one therapy after another which has been proven in practice, but of which the AMA "doesn't approve," I almost get angry. It seems like almost every branch of science has the same problem.

In recent months I've learned a bunch about the problems that dental amalgam and nickel inlays can cause. If you have any amalgam fillings, I guarantee you'll be healthier if you get 'em replaced. You want to read *It's All In Your Head* by Hal Huggins. Those fillings, which the ADA still supports, are dumping poisonous silver and mercury into your body.

Then there's the way we're doing a job on ourselves by preventing ultraviolet light from getting into our eyeballs. Read *Health And Light* by John Ott, *Light, Medicine of the Future*, by Jacob Liberman, and *Into The Light* by W.C. Douglass. It's incredible what even just a little ultraviolet light can do for your health.

There also is a long history of curing a wide variety of illnesses by exposing a small amount of a person's blood to ultraviolet light and then putting it back. Illnesses like cancer.

Are low-powered magnetic fields helping to make you and your family sick? You bet they are. You can read more about this in *The Body Electric* by Robert Becker, *Cross Currents*, also by Becker, *The Electricity Around You May Be Hazardous To Your Health* by Ellen Sugarman, *Currents of Death* by Paul Brodeur, and *The Great Power-Line Cover-Up*, also by Brodeur.

You'll also want to read *Magnetism and Its Effects on the Living System* by Davis & Rawls.

And if that isn't enough, you're going to love *Hydrogen Peroxide Medical Miracle* by William Douglass. If you know anyone with cancer, colds, flu, artery plaque, heart disease, shingles, gum disease, etc., you should get them to read the book.

K4VSC sent me a brochure from the Jungle Aviation and Radio Service (JAARS) about a snakebite zapper. It does about the same as zapping a snakebite with a wire from the spark

plug of a car or boat, the way the Peruvian Indians do. JAARS is making small hand-operated generators for jungle use (no batteries to die). They claim that the treatment also works on scorpion stings. I'd say we need more research. I'll bet a similar approach would work on jellyfish, stingray, scorpion fish, and fire coral stings. It might work fine for bee and wasp stings, and even mosquitos and other insect bites. Imagine what a business you could have with a little gadget which instantly stopped the itching of bug bites. It would have a small ring you'd put around the bite and an electrode to touch the middle of the bite. Zap, and no more pain.

There are more than a few reasons to suspect that something like this might also help with some skin or breast cancers. I've a letter from a reader citing the Swedish use of 12 volts to get rid of breast cancers.

Alas, there is very little funding available for research into non-pharmaceutical approaches to sickness repair, and it has been claimed by many people in the field that the FDA is controlled by the pharmaceutical industry. Tough combo to fight, no matter how good the therapy.

Now we read that in the last 50 years male sperm counts have been cut in half. What we haven't yet read is what whatever is doing this is also doing to the surviving half of our sperm. If whatever it is is killing half, imagine how sick or damaged the other half must be! Pesticides are suspected. They've been used so extravagantly that now they're into just about everything we eat and much of what we drink. They're into our farm lands and our water supplies. We eat them, drink them, and breathe them.

So what can we do about this mess we've gotten ourselves into? You can do the same thing I'm doing. You can read and get the facts. You can give talks at your local Chambers of Commerce, Rotary, Lions clubs. You can get on talk radio and pass the word. You can raise hell and put a brick under it.

I'm not talking ecoscams with little or no scientific basis like the ridiculous Alar scare, the owls, nuclear winter, acid rain, greenhouse summer, the snail darter, or the blessed ozone hole. And by the way, there are some fine books on all these media-hyped scares. The two I recommend as the best are *Environmental Overkill* by Dixie Lee Ray, and *Ecoscam* by Ronald Bailey.

Your alternative is to keep quiet and shrug off your responsibility to do your best to fight for a healthier life for your children . . . and theirs. And, as you are shrugging, try to remember that the main reason democracy has failed so disastrously in America is the refusal of most people to assume any responsibility, thus leaving much of the change in the hands of nut cases who do go out and scream and carry on.

The bottom line: Do your homework and then make yourself heard.

SPECIAL EVENTS

Number 25 on your Feedback card

Ham Doings Around the World

AUG 1

DOYLESTOWN, PA The Wyndmoor AR Rptr. Club of Doylestown will meet at the Doylestown Twnshp. Bldg. Comm. Room on Wells Rd., at 7:30 PM. Interested persons may call Bob Agans, (215) 348-7966. The Club features speakers and videotapes on topics concerning amateur radio. They also get together for license tests and weekend excursions.

AUG 1-30

PITTSBURGH, PA For details regarding a Hamfest/Computer Show/Flea Market, contact Catherine Crnhovich, Queen Roberta College, 3343 Webster Ave., Pittsburgh PA 15219.

AUG 5-7

VERNON, BC, CANADA The 3rd annual Sky High Hamfest will be held by the North Okanagan RAC, at Silver Star Mt. Resort. Flea Market. Dinner & Dance. HF Station. More. Contact North Okanagan ARC, P.O. Box 1706, Vernon BC V1T 8C3, Canada. For hotel reservations, call 1-800-663-4431.

AUG 6

CARLINVILLE, IL The Macoupin County ARC, Inc., will hold "Hamfest '94" at the Macoupin County Fairgrounds, 1/2 mile north of Carlinville, on Route 4. Doors open at 8 AM. VE Ex-

ams, all classes, pre-registration required. Talk-in on 146.82 and 443.400 (103.5 PL). For registration and info, call (217) 854-8261.

GOSHEN, IN The Elkhart County Hamfest will be held at the 4-H Fair Grounds located on CR 34. Talk-in on 145.430(-), 224.90(-), 443.325(+), PL 131.8. VE Exams. Contact Jocelyne WZ9M, 20284 CR 36, Goshen IN 46526. Tel. (219) 533-7632.

INDIANAPOLIS, IN The annual WA9SNT Hamfest will be held at ITT Tech. Inst., 9511 Angola Ct., from 8 AM-3 PM. Set-up at 6 AM. This event is sponsored by the ITT Radio Club. Talk-in on 145.25(-). Contact Dave Johnston K9HDO, (317) 875-8640.

VALPARAISO, IN The Porter County Hamfest/Computer Show, sponsored by the Porter County ARC in co-operation with The Porter County Tourism Bureau, will be held at Porter County Expo Center. Doors open at 8 AM (set-up at 6 AM). VE Exams 9 AM-12 Noon. Talk-in on 146.775-6kc 131.8 PL and 146.520 simplex. Contact Rich N9QLQ, (219) 762-8701; or send SASE to PCARC Hamfest, P.O. Box 1782, Valparaiso IN 46384-1782.

AUG 7

CROOKED LAKE, ANGOLA, IN The Annual Land of Lakes Angola Hamfest, sponsored by the Land of Lakes ARC, will be held 6 AM-2 PM at Steuben

Listings are free of charge as space permits. Please send us your Special Event two months in advance of the issue you want it to appear in. For example, if you want it to appear in the January issue, we should receive it by October 31. Provide a clear, concise summary of the essential details about your Special Event. Check Special Events File Area #11 on our BBS (603-924-9343), for listings that were too late to get into publication.

County 4-H Fairgrounds, corner of 200W & 200 N. VE Exams for all classes. Talk-in on 147.180, 145.090 packet, 444.350 131.8 tone, 444.900/100, 224.94, 53.050. Contact Sharon Brown WD9DSP, 905 W Pkwy. Dr., Pleasant Lake IN 46779. Tel. (219) 475-5897.

MARSHFIELD, WI The Marshfield Area ARS will hold their 3rd annual Picnic, in Wildwood Pk., beginning around 11 AM. This is a Potluck/Swapfest. Talk-in on 147.180. Contact Guy A. Boucher KB9GPJ, 107 West Third St., Marshfield WI 54449. Tel. (715) 384-4323. PACK-ETT:KB9GPJ @ W9IHW.WI.USA.NA.

NEW KENSINGTON, PA The Skyview Radio Soc. will sponsor its annual Swap-n-Shop Hamfest from 8 AM-3 PM at the Club grounds on Turkey Ridge Rd. Talk-in on 146.64-. Contact Michael Peliz N3MRU, 11 Manorfield Dr., Delmont PA 15626. Tel. (412) 468-8699.

PEOTONE, IL The 60th annual Hamfest/Computer Festival, sponsored by Hamfests RC, Inc., will be held at Will County Fairgrounds 6 AM-3 PM. Flea Market. Set-up Sat. Aug. 6th at 6 PM-12 midnight. Talk-in on 146.52 simplex, 146.64(-) (courtesy of STARS); 146.94 (-) (courtesy of KARS). For info, call (708) 535-AHAM. For advance tickets, send SASE and check by July 20th to David F. Brasel NF9N, 6933 W. 110 St., Worth IL 60482. Tel. (708) 448-0580.

UPPER MARLBORO, MD The 4th annual Southern Patuxent Hamfest will be

held from 7 AM-2 PM at the Show Place Arena. Set-up from noon to 8 PM on Sat., Aug. 6th. Talk-in on 147.150(+). Contact SPARC Hamfest, P.O. Box 399, St. Leonard MD 20685. Tel. (410) 586-2177. Sponsored by The Southern Patuxent ARC.

WELLESLEY, MA The Wellesley ARS and the Babson Wireless Club will co-sponsor a Ham Flea Market from 9 AM-2 PM at Trim Hall, Babson College. VE Exams at 11:30 AM (register by 11 AM). Bring exam fee of \$5.75 (checks made out to ARRL/VEC), an original and a copy of your license, an original and a copy of any CSEs held, a calculator and a pen. To reserve tables, contact Barbara Holdridge N1ICQ, 107 Church St., Westwood MA 02090. Tel. (617) 329-2628. VE Exams Contact: Gerry Driscoll NV1T, 107 Church St., Westwood MA 02090. Tel. (617) 444-2686.

AUG 13

QUINCY, IL The Western IL ARC will hold the 1st Post-Flood Ham Radio/Computer Swapfest at Eagles Alps Lodge, 3737 N. 5th St. VE Exams (NA9Q-Reservations (217) 224-8526). Talk-in on 146.63/.03. For info, contact Rod Simon N9MCX, c/o WIARC, P.O. Box 3132, Quincy IL 62305-3132. Tel. (217) 223-8739.

TACOMA, WA The Radio Club of Tacoma will have its annual Flea Market at Charles Wright Academy, 7723 Cham-

1691 MHz Weather Satellite System

1691 MHz Hemt Pre-amp. model TS-1691-P. Amp	\$250
1691 MHz Receiver model TS-1691-Recvr	\$450
Decoder Board & Software model TS-VGA-SAT4	\$349
Low Loss Coaxial Cable (65ft) with connectors. other lengths available	\$65
Track II Satellite Orbital Program. Tracks ALL satellites, world map, print out	\$99
1691 MHz Loop Yagi Antenna model 1691-LY(N)	\$99

Demonstration Disc (IBM-PC VGA compatible)
of signals recorded from WX-SAT system. \$3

Shipping: FOB Concord, Mass.
Prices subject to change without notice.



si

SPECTRUM INTERNATIONAL, INC.
Post Office Box 1084, Dept. S
Concord, Mass. 01742, U.S.A.
Phone: (508) 263-2145
Fax: (508) 263-7008

CIRCLE 183 ON READER SERVICE CARD

Measure Up With Coaxial Dynamics Model 81000A RF Directional Wattmeter

Model 81000A is a thoroughly engineered, portable, insertion type wattmeter designed to measure both FWD/RFL C. W. power in Coaxial transmission lines. 81000A is comprised of a built-in line section, direct reading 3-scale meter protected by a shock-proof housing. Quick-match connectors, plus a complete selection of plug-in elements, gives the FRONT RUNNER reliability, durability, flexibility and adaptability with a two year warranty.


Contact us for your nearest authorized Coaxial Dynamics representative or distributor in our world-wide sales network.



**COAXIAL
DYNAMICS,
INC.**

15210 Industrial Parkway,
Cleveland, Ohio 44135
216-267-2233
1-800-COAXIAL
FAX: 216-267-3142

Service and Dependability...A Part of Every Product



CIRCLE 186 ON READER SERVICE CARD

bers Creek Rd. W., from 9 AM-3 PM. VE Exams at 10 AM. Commercial and non-commercial vendors MUST pre-register for tables. Talk-in on 148.28. Contact **Alan Allen N7EAY**, P.O. Box 11188, Tacoma, WA 98411. Tel. (206) 475-7413.

AUG 13-14

CHARLOTTE, VT The BARC 42nd International Hamfest will be held by the Burlington ARC at The Old Lantern Campgrounds on Greenbush Rd. Talk-in on 146.61/01, 146.94/34, and simplex 146.52. Flea Market. VE Exams. Demonstrations. Contact **Duane Waller N1BBR**, (802) 877-2819.

SHREVEPORT, LA The Shreveport ARA "ARK-LA-TEX" Hamfest will be held at Bossier City Civic Center, Benton Rd., Bossier City LA. Time: Sat. 8:30 AM-4:30 PM; Sun. 8:30 AM-1 PM. VE Exams. Forums. Banquet. Talk-in on 147.03. Contact **Alice B. Prudhomme KG5ZZ**, Rt. 1 Box 410, Mansfield LA 71052. Tel. (318) 872-5988 after 6 PM.

AUG 14

CHARLOTTE, NC Roll-A-Round Skate Center, 8830 East Harris Blvd., will be the location for the Charlotte ARC Hamfest/Computer Fair. Time: 8 AM-4 PM. Flea Market spaces are limited and must be pre-registered. Talk-in on 147.06(-), 444.85(+). For more info, call (704) 522-4971, Ext. 3330. Make checks payable to Charlotte ARC, and send with SASE (before Aug. 1st) to Charlotte ARC, P.O. Box 33582, Charlotte NC 28233-3582.

EASTON, PA The Delaware-Lehigh

ARC, Inc. will hold its annual Hamfest/Computer event at the Career Inst. of Tech., 5335 Kesslersville Rd., starting at 8 AM. Set-up at 6 AM. Talk-in will be on 146.10/70 MHz, W3OK Rptr. Contact **Bill Goodman K3ANS**, (610) 253-2745 or (610) 258-5060. You may also call the DLARC answering service at (610) 820-9110.

NAZARETH, PA A Hamfest/Computer Show will be held by the Delaware-Lehigh ARC, Inc. at the Career Institute of Tech., Easton PA, starting at 8 AM. Set-up at 6 AM. VE Exams. Demo Ham Station. Electronics Test Bench, and more. Talk-in on 146.10/70 W3OK Rptr. Contact **Bill Goodman K3ANS**, (610) 253-2745 or (610) 258-5060. Also call DLARC Answering Service at (610) 820-9110. Make checks payable to Delaware-Lehigh ARC, Inc., RR 4 Greystone Bldg., Nazareth PA 18064-9211.

AUG 20

ALBUQUERQUE, NM The Duke City Hamfest is scheduled to be held at the New Mexico Army Nat'l Guard Armory, 600 Wyoming Blvd., N.E. Hours: 7 AM MDT-5 PM MDT. Set-up Aug. 19th after 6 PM. For details about VE Exams, please call **Bob Witter** at (505) 292-3218. Flea Market spaces by pre-registration only. For info call **KCSFT** or **KB5SF** at (505) 821-2771. Make checks payable to The Duke City Hamfest, and mail with SASE prior to Aug. 11th to Duke City Hamfest, P.O. Box 6552, Albuquerque NM 87197-6552. Talk-in on 147.10 (+600 kHz) with back up on

147.15 MHz (+600 kHz). No one under the age of 15 admitted without parent or guardian.

LONGVIEW, WA The Lower Columbia ARA will host their 3rd annual Ham Radio/Computer/Electronic Equip. Swap Meet from 9 AM-3 PM at Cowitz County Fairgrounds. Set-up Aug. 19th 5 PM-9 PM; Aug. 20th, 6 AM-8:45 AM. Talk-in on 147.26(+). K7ZVV Rptr. For info, call (206) 425-6076, (206) 425-9184, or (206) 425-1866. Make checks payable to LCARA, and mail to LCARA Swap Tables, P.O. Box 906, Longview WA 98632.

AUG 20-21

HUNTSVILLE, AL The 1994 Huntsville Hamfest will be held at the Von Braun Civic Center. Doors open to the public at 9 AM on both days. Dealer Show/Flea Market. Tech. Forums. Banquets, and more. The nearby Huntsville Hilton Hotel is participating by offering special Hamfest rates. Talk-in by K4BFT on 146.34/94 MHz. For info, call (205) 534-7175, or write to Huntsville Hamfest, P.O. Box 12534, Huntsville AL 35815.

AUG 21

CAMBRIDGE, MA The MIT Electronics Research Soc., the MIT Radio Soc., and the Harvard Wireless Club will hold a Flea Market from 9 AM-2 PM at Albany and Main St. For details call (617) 253-3776. Mail advance reservations before Aug. 5th to W7GSL, P.O. Box 82 MIT BR., Cambridge MA 02139. Talk-in on 146.52 and 449.725/ 444.725 PL 2A W1XM Rptr.

MARYSVILLE, OH The 18th Annual HamFest of the Union County ARC will be held at the Union County Fairgrounds near Columbus OH. Radio equip./Computer products. Flea Market. Contact **Gene Moore N8YRF**, 24461 Claiborne Rd., Marysville OH 43040. Tel. (513) 246-5943.

AUG 26-28

SAN DIEGO, CA The 1994 ARRL Southwestern Div. Convention will be hosted by the San Diego AR Council, Inc. at the Town and Country Convention Center off of I-8 in San Diego. Times: Fri. 3 PM; Sat. 9 AM-4 PM; Sun. 9 AM-Noon. Harbor Dinner Cruise Fri. night. Banquet Sat. eve. featuring Steve Roberts N4VRE and Behemoth. VE Exams. There will also be an ARRL ceremony for Wouff Hong. Talk-in on 145.320 - 107.2 PL. For info call (619) 278-4284. To pre-register, contact **Bob Boehme**, 10340 Everell Place, Santee CA 92071.

AUG 27

BRIDGEWATER, NJ The Somerset County ARS Inc. will hold their annual Hamfest at the Somerset County 4H Center on Milltown Rd., just off of Route 202. Time: 8 AM-1 PM. Set-up at 6 AM. Talk-in on 448.175(-). Contact **Donna**, or **George N2RQH**, (908) 369-4533. Or write to SCARS, P.O. Box 742, Manville NJ 08835.

CHAFFEE, NY The Arcade Kiwanis will sponsor the Pioneer Radio Operators' Soc. 3rd annual Chaffee Hamfest/Computer Show from 7 AM-3 PM at Marion Pk. Talk-in on 145.390 and 444.175. Ad-

A KEYNOTE SPEAKER from Grove!



Order
SPK13

Introductory price.

\$199^{95*}

Price goes up on September 1, 1994.

* Plus \$7.50 UPS Ground Shipping

SPECIFICATIONS:

Power Required: 12 to 14 VDC @500 mA; 120 VAC adaptor incl.
Audio Power Output: 2.5 W @ 10% THD (8 ohms)
Audio Selectivity: Peak/notch 30 dB or greater, 0.3-6 kHz
Squelch Hold: 0-10 seconds
Noise Limiter: Adjustable-threshold pulse noise clamp
Tape Activator: Audio activated (VOX), 3 second hold
Tape Output: 500 mV P-P @ 600 ohms (nom.)
Headphone Jack: Universal mono-wired stereo Jack
Dimensions: 10-7/8"W x 6-7/8"H x 7-1/4"D

The Grove engineering team has created the most revolutionary audio accessory on the communication market: the SP200 Sound Enhancer.

Housed in a stylish, solid oak cabinet hand crafted in the mountains of North Carolina, the SP200 is sure to enhance any room and radio receiver. The control panel, constructed of sturdy, black aluminum, has been designed for optimum ease and convenience when tuning and refining signals.

The SP200 combines a powerful audio amplifier, top-of-the-line speaker, and an adjustable filter system in one to create the most versatile and precise listening environment ever available to radio enthusiasts. The keen peak/notch filter system and advanced noise limiter allow the listener to pull clear and distinct signals out of the haze of interference and background noise, while the adjustable bass and treble provide the flexibility to create just the sound you want. FSK, RTTY, packet, FAX, CW and all other data systems are enhanced while interference and electrical noise are reduced or even eliminated by the analog audio processor.

The SP200 also comes equipped with a stereo/mono headphone jack, for private listening, and an automatic tape activator so that you never have to miss anything.

Try the new Grove SP200 Sound Enhancer with your receiver, scanner, or transceiver and enjoy the latest in speaker sophistication; you'll agree this is truly a keynote speaker!

Why pay over \$400 for these separate accessories:

- Speaker
- Adjustable Filter
- Recorder Activator
- Audio Amplifier
- Audio Activated Squelch

When you can have it all in the new Grove

SP-200

SOUND ENHANCER

CALL NOW!

(800) 438-8155
(704) 837-9200

GROVE
ENTERPRISES

Changing the way you
hear the world

CIRCLE 348 ON READER SERVICE CARD

beep..

beep... last call for every Ham who'd like
to have loads of fun !!!



53rd Annual Convention Mexican Federation of Radio Experimenters



The Mexican Federation of Ham Radio Experimenters (Federación Mexicana de Radio Experimentors invites all amateur radio operators to our 53rd Annual Convention, which will be held in the beautiful paradise of Puerto Vallarta, Jalisco, Mexico, from October 6th thru 9th.

The Vallarta Casa Grande Hotel will host this event in its main convention center and exhibit room. Your purchase includes 3 nights and 4 days (if you wish to extend your stay, more days are available—just contact the hotel), free beverages from 11 a.m. to 11 p.m., as well as daily breakfast and lunch throughout the duration of the convention. To top it off, on the first evening, you will enjoy a Mexican Night Dinner; on the closing evening, dine and dance at the Gala Dinner. Early reservations will give you a preferred rate, as indicated.

If you plan to attend with your family, great! Two children can stay for free in each room and children's programs are offered. There will also be special entertainment programs available for spouses, so everyone can have fun.

Guided tours of Vallarta are available for anyone who is interested in purchasing Mexican arts, crafts, and souvenirs. Also we'll provide a free shuttle from the hotel to the beach all day long.

During this celebration, the "Ham of the Year," as well as the "Azteca de Oro" and "Azteca de Plata" awards will be presented.

Don't miss the opportunity to enjoy Mexico's most beautiful vacation resort, Puerto Vallarta, and have fun joining our Ham Group from all over the nation!

For further information, please write to:
FEDERACION MEXICANA DE
RADIOEXPERIMENTADORES, A.C.
Molinos 51, Desp. 307 y 308,
Col. Mixcoac México D.F. CP 03910
Or send us a fax to:
+ 011 (525) 273-1019



Get it...right away!

Convention pass includes: admission, hospitality with all lodging, food, and events indicated. For reservations send your certified check or money order in U.S. currency to address below. Costs are:

Before 8 - 20 - 94	\$395
From 8 - 21 - 94 to 9 - 20 - 94	\$445
At door (if available)	\$495

Please charge to:

Visa _____ MC _____ AMEX _____

Card Number _____

Name _____

Expiration Date _____

Amount USD _____

Signature _____

For exhibit space quotes and rates, please contact us via fax or mail.

beep...beep...beep...beep...beep...beep...beep...beep...

beep...beep...beep...beep...beep...beep...beep...beep...beep...beep...

vance registration tickets \$3 each (Flea Market set-up included). Make checks payable to **Mike Wrona**, 139 Greenmeadow Dr., West Seneca NY 14224. Please include an SASE.

CHANUTE, KS The Chanute Area ARC Hamfest will be held 9 AM-2 PM at the Nat'l Guard Armory, South Santa Fe St. VE Exams: registration at 9:30 AM. Testing at 10 AM. Bring originals and copies of license and all certificates, and a picture ID. Flea Market set-up 7 AM-9 AM. Talk-in on 146.745-. Contact **Paul N0NBD** or **Sarah N0TKO**, Rt. 1, Box 208, Humboldt KS 66748. Tel. (316) 473-2873.

RHINELANDER, WI The Northwoods ARC, ARES, Rhinelander and Tomahawk Rptr. Assns. will co-sponsor the Northwoods Swapfest. Doors open 8 AM-2 PM at Sugar Camp Town Hall, 13 miles north of Rhinelander, on Hwy. 17. VE Exams: Registration 10:30 AM, testing at 11 AM. Contact **Mary Berger N59Q**, 367 Lois St., Rhinelander WI 54501. Tel. (715) 362-9296.

ROSEAU, MN Lake of the Woods Rptr. Assn., Inc. will hold their 8th annual Ham Fest at Roseau High School Gym, Hwy #11 E. VE Exams. Flea Market. Banquet with program. More. Talk-in on 147.69/09 and 146.40/147.00. Contact **David Landby KB0HAP**, Rte. 3, Box 10, Warroad MN 56763. Tel. (218) 386-1092.

AUG 28

LEBANON, TN A Hamfest will be held at Cedars of Lebanon State Pk., U.S. Hwy. 231, 7 mi. south of I-40. The Short Mountain Rptr. Club will host this event 7 AM-3 PM. Talk-in on 146.91. Contact **Mary Alice Fanning KA4GSB**, 4936

Danby Dr., Nashville TN 37211. Tel. (615) 832-3215.

MATAMORAS, PA The ARRL sanctioned Tri-State ARC Hamfest will be held at Hunts Best Western Pavilion, Rt. 84 Exit 11 (where PA, NY and NJ meet). Flea Market. ARRL Booth. Contact **Paul KD3L**, (717) 491-4808 after 1 PM; **Ray WY2D**, (914) 856-1733 after 6 PM; or **Bob N3NPT**, (717) 296-4551.

ST. CHARLES, MO The St. Charles ARC will host "Hamfest94" at the Blanchette Park from 6:30 AM-2:30 PM. Vendor area open 9 AM. Talk-in on 146.071/67. Contact **Scott Schultz N0UVM**, 241 Burning Leaf Dr., St. Peters MO 63376. Tel. (314) 928-7267. To pre-register for VE Exams, call (314) 524-3254.

WOODSTOCK, IL The Tri-County Radio Group, Inc. will hold its Hamfest/Computer Show at the McHenry County Fairgrounds located just off Route 14 on Route 47, beginning at 6:30 AM for Fleamarket, and 8 AM for exhibitors. (Set-up Sat. by appointment, or 6:30 AM on Sun.) Talk-in on 146.52 simplex. Reservation deadline is Aug. 10th. Write to **T.C.R.G.**, P.O. Box 3107, Skokie IL 60076-6107; or call **Robert N9KXG**, (708) 658-1678.

YONKERS, NY A Hamfest/Computerfest, sponsored by the Yonkers ARC, will be held 9 AM-3 PM at the Yonkers Municipal Parking Garage on Main St. Talk-in on 146.865, 440.150 MHz. Pre-registration is \$10 per space. Make checks payable to the **Yonkers ARC** and send your order with an SASE to **Y.A.R.C.**, P.O. Box 378, Centuck Sta., Yonkers NY 10710-0378.

SEPT 2-3

NEW ORLEANS, LA The New Orleans Internat'l DX Convention will be held at Royal Sonesta Hotel on Bourbon St. Times: Fri., Sept. 2, 1 PM-11 PM; Sat., Sept. 3, 8 AM-Midnight. Registration deadline is Aug. 15th. For more info, call (504) 283-4143 days only; FAX (504) 524-2129. Send checks or money orders payable to: **New Orleans Internat'l DX Convention**, c/o **Michael Mayer W5ZPA**, 5836 Marcia Ave., New Orleans LA 70124.

SEPT 17

SCOTTSDALE, AZ The Family AR Event will hold its 2nd annual event at Rawhide Western Town, 23023 N. Scottsdale Rd. RC airplane demo. Weathersat forums. Emergency Ham Radio. Activities for children. Swap meet area opens at 6 AM. Exhibit hall opens at 9 AM. Contact **Len Winkler KB7LPW**, P.O. Box 9219, Phoenix AZ 85068. Tel. (602) 861-0303.

SPECIAL EVENT STATIONS

AUG 5-7

MACUNGIE, PA Local hams will operate W3TEB on the General 80, 40 and 20 meter phone subbands and 146.55, in conjunction with the 31st annual Das Awkscht Fescht (PA Dutch for "August Festival" - A Festival and Antique Car Show). For a certificate, send QSL and SASE to **Henry Buchin W3TEB**, 21 East Main St., Macungie PA 18062-1308.

AUG 6-7

BARNEGAT LIGHT, NJ The Old Barney ARC will operate W2OB from "OLD BARNEY," the Barnegat Lighthouse (Long Beach Is. IOTA NA-111), to commemorate Nat'l Lighthouse Day. Time: 3000 UTC-0000 UTC each day. Freq.: Look in the lower 25 kHz of the General phone bands; 40, 20, 15, and 10 meters, plus 146.52 simplex, 146.835 Rptr., and other local Rptrs. For a special QSL, send a 9" x 12" SASE with 2 units of postage, via NU2F. For more info, contact **QSL W2OB via NU2F**, **Joe Fleishinger Sr.**, 75 Joshua Dr., Manahawkin NJ 08050 USA.

WELLSBORO, PA The Tioga County ARC will operate WO3C 1300Z Aug. 6-1800Z Aug. 7, from Leonard Harrison State Pk., to celebrate the 50th Anniversary of Smokey Bear. Operation will be in the 80, 40, 20 and 15 meter General phone subbands, and in the Novice 10 meter phone subband. For a certificate, send QSL and a 9" x 12" SASE to **Darlene Rahn WO3C**, R.D. #6 Box 200, Wellsboro PA 16901.

AUG 7-13

POTTSVILLE, PA The Schuylkill ARA will operate N3ILC Aug. 7th-Aug. 13th, to celebrate the Schuylkill County Fair. Operation will be both CW and phone on the General and Novice subbands. For a certificate, send QSL and SASE to **Ed Brennan N3ILC**, 520 Spring Garden St., Pottsville PA 17901-1651.

AUG 12-13

MIDDLEBOURNE, WV The Tyler County ARO will operate KA8GOH 1500Z-2200Z Aug. 12th and 13th to celebrate the 32nd annual Tyler County Fair. Operation will be in the lower portion of the General 40 and 20 meter phone bands, and the 146.385/R. For a certificate, send QSL and 9" x 12" SASE to **TCARO**, P.O. Box 287, Middlebourne WV 26149.

AUG 12-16

WEST ISLAND, MONTREAL, CANADA Members of the West Island ARC are planning the club's 3rd expedition to St. Paul Island (off the northern tip of Nova Scotia). IOTA NA-94. The group plans to operate CW, SSB, and RTTY, using the call CY9CWI. Operation will be on 40, 80, and 160 meters. Operations will start at 0000Z on Aug. 12th and continue through Aug. 16th. Freq.: (MHz) 1.830-50, 3.505-15, 3.780-3.800, 7.040-7.060, 7.250, 10.110, 14.040, 14.195, 18.080, 18.120, 21.040, 21.320, 24.940, 28.120, 28.495, RS-12: Tx 21.220, Rx 29.420, RTTY 7.090, 14.090. Listen for operators Reg. VE2AYU, Coos. VE2GTI, Jean VE2JXC, Jean VE2TBH, Lowell VY2OX, Fred VE2SEI, Andrew VE2WHO, Helen VE2YAK, and Margaret VE2ZOO. VE2YAK and VE2ZOO will be especially looking for ops trying for YL DXCC. Address QSLs to **West Island ARC Inc.**, P.O. Box 884, Pointe-Claire/Dorval QC, Canada H9R 4Z6. For more info, contact **Fred Archibald VE2SEI**, 130 Embleton Cres., Pointe Claire QC, Canada H9R 3N2.

AUG 13

BARNESBORO, PA The Dividing Ridge ARC will operate KE3DR 1500Z-2300Z to commemorate Barnesboro's Centennial. Operation will be in the lower General 40 and 20 meter phone subbands and the Novice phone portion on 10 meters. For a certificate, send QSL and SASE to **Dividing Ridge ARC**, RD#1 Box 503-A, Barnesboro PA 15714.

CENTERVILLE, GA The employees of Georgia Power Co. (Plant Scherer) and friends will operate Station AD4FC to commemorate the company's dedication to the environment and the community. The event will begin at 1200 UTC and end at 2400 UTC. Operation will be in the lower 25 kHz of 80, 40, 20, and 15 meter General class phone subbands, and in the 10 meter Novice class phone subband. For a certificate, send a 9" x 12" SASE to **Don Hall AD4FC**, 262 Valencia Cir., Centerville GA 31028. There will also be VE Exams and a Tailgate Swapfest.

LAKE WINNIPESAUKEE, NH The Central NH ARC will operate W1JY from the deck of the 235 ft. M/S Mt. Washington. Operation will be 1200Z-1900Z on 28.333, 21.333 and 14.333 +/- 3mhz. Listen on 10 meters on the hour, 15 meters at 20 minutes after the hour, and 20 meters at 40 minutes after the hour. For a certificate, send 9" x 12" SASE and QSL to **CNHARC**, Box 1112, Laconia NH 03247-1112.

AUG 13-14

FALL RIVER, MA Station W1ACT will operate from aboard the tall ship "H.M.S. Bounty" as part of the annual "Fall River Celebrates America" Festival. Operations will be on 2, 6 and 10 through 160 meters, using CW, SSB, and FM. The Station will operate 1400Z Aug. 13th-1400Z Aug. 14th. To get a QSL card, please QSL via **Ed Walsh WV1L**, 798 Second St., Fall River MA 02721.

MILFORD, MI The Milford ARC will operate W8YDK 1500Z-2300Z both days, to celebrate the Milford Memories Summer Festival in commemoration of the discovery and founding of Milford MI. Operation will be in the lower portions of the General and Novice 40, 20 and 10 meter subbands. For a QSL card, send SASE and QSL to **Joe Kaminsky N8PGF**, MARC, P.O. Box 301, Highland MI 48357.

TRANSMITTER LOCATION

Direction Finding System Tracks Down

- Stuck Microphones
- Cable TV Leaks
- Jammed Repeaters & Cell Sites

Models available with computer interface, synthesized speech, for fixed or mobile use, covering 50 MHz to 1 GHz. Call or fax for details



DOPPLER SYSTEMS, INC.
P.O. Box 2780
Carefree, Arizona 85377
Tel: (602) 488-9755
Fax: (602) 488-1295

CIRCLE 13 ON READER SERVICE CARD

BARTER 'N' BUY

Number 26 on your Feedback card

Turn your old ham and computer gear into cash now. Sure, you can wait for a hamfest to try and dump it, but you know you'll get a far more realistic price if you have it out where 100,000 active ham potential buyers can see it than the few hundred local hams who come by a flea market table. Check your attic, garage, cellar and closet shelves and get cash for your ham and computer gear before it's too old to sell. You know you're not going to use it again, so why leave it for your widow to throw out? That stuff isn't getting any younger!

The 73 Flea Market, Barter 'n' Buy, costs you peanuts (almost)—comes to 35 cents a word for individual (noncommercial) ads and \$1.00 a word for commercial ads. Don't plan on telling a long story. Use abbreviations, cram it in. But be honest. There are plenty of hams who love to fix things, so if it doesn't work, say so.

Make your list, count the words, including your call, address and phone number. Include a check or your credit card number and expiration. If you're placing a commercial ad, include an additional phone number, separate from your ad.

This is a monthly magazine, not a daily newspaper, so figure a couple months before the action starts; then be prepared. If you get too many calls, you priced it low. If you don't get many calls, too high.

So get busy. Blow the dust off, check everything out, make sure it still works right and junebe you can help make a ham sure it still works right and junebe you can help make a ham newcomer or retired old timer happy with that rig you're not using now. Or you might get busy on your computer and put together a list of small gear/parts to send to those interested?

Send your ads and payment to the Barter 'n' Buy, Judy Walker, 70 Rt. 202N, Peterborough NH 03458 and get set for the phone calls.

The deadline for the September classified ad section is July 14, 1994.

ALL ABOUT CRYSTAL SETS. Theory and construction of crystal set radios. \$9.95 each, ppd USA. Send to: **AL-LABOUR BOOKS**, Dept. S, P.O. Box 22366, San Diego CA 92192. BNB200

CUSTOM MADE-HAND TOOLED leather products with your initials, name, call letters. Photo's & estimates available. Key rings, wallets, belts, purses, hanging signs, specialty items. **GREAT GIFT. LEATHER & WEST, 67**

Causeway Rd., West Swanzy NH 03469. (603)352-6256. 9-4 pm. M-F ET. BNB215

SUPERFAST MORSE CODE SUPPEREASY. Subliminal cassette, \$12. LEARN MORSE CODE IN 1 HOUR. Amazing supereasy technique, \$12; both \$20. Moneyback guarantee. Free Catalog: **SASE BAHR-T4**, 150 Greenfield, Bloomington IL 60108. BNB221

OVER 500 TAILGATE SPACES THIS YEAR. Suncoast Amateur Radio and Computer Convention. November 19 &

20, 1994. Florida State Fairgrounds. Write: **FGCARC**, P.O. Box 2423, Clearwater FL 34617-2423. BNB265

WANTED: AUDIO EQUIPMENT. Tube, Solid State, McIntosh, Marantz, Tannoy, EV-Patricians, Western Electric, Nakamichi preferred. John, (410)465-2699. BNB268

QSL SAMPLES- 50 cents. **SAM-CARDS**, 48 Monte Carlo Dr., Pittsburgh PA 15239. BNB275

MOTOROLA EQUIPMENT. Two 450Mhz MOCOM 35 Transceivers with 110v power supplies, one Alert Monitor 450Mhz Base receiver, new with manuals, \$600.00 takes all. Two 450Mhz Duplexers, \$200.00. Tony Sperduti, WB2MPZ, 710 Central Park Blvd., Port Orange FL 32127, (904)756-7763. BNB288

ATTENTION HAMS! Subscribe to 6-50 Worldwide for Six Meter Enthusiasts, DX Digest for DX Chasers, or The Novice/Tech Report. Call (817)694-4047 or FAX (817)694-2522. BNB292

COMMODORE 64 REPAIR. Fast turn around. **SOUTHERN TECHNOLOGIES AMATEUR RADIO**, 10715 SW 190th Street #9, Miami FL 33157. (305)238-3327. BNB295

KIT BUILDERS—NEW, SYNTHESIZED qrp Transmitter/Transceiver, the ARK4. Full Transceiver Kit w/case only

\$199.95. One board, no wiring, top quality components & PCB. **GUARANTEED TO WORK.** For info send SASE; Call/Write to order: **S & S ENGINEERING**, 14102 Brown Road, Smithsburg MD 21783; (301)416-0661. BNB304

WANTED: Electron Tubes, ICS, Semiconductors. **ASTRAL**, P.O. Box 707ST, Linden NJ 07036. Call (800)666-8467. BNB307

KENWOOD AUTHORIZED REPAIR. Also ICOM, Yaesu. **GROTON ELECTRONICS**, Box 379, Groton MA 01450. (508)448-3322. BNB310

PROGRAMMABLE COUNTER - Works with ANY VFO Rig! Get a digital display for your rig, 100 Hz resolution. You can read the tuned frequency directly, no need to calculate offsets. Counts to 40 Mhz, up OR down. Counter Kit, \$69.95; Kit w/case, \$99.95; Assembled w/case, \$139.95. **GUARANTEED TO WORK.** For info send SASE: Call/write to order: **S & S ENGINEERING**, 14102 Brown Rd., Smithsburg MD 21783; (301)416-0661. BNB334

RCI-2950 OWNERS: New modification manual including Power increase. Clarifier modification. Modulation increase. Operating hints, and more. Parts included. Only \$20.00 ppd in U.S. (Missouri residents add \$1.15 tax). **SCOTT**, P.O. Box 510408, St. Louis MO 63151-0408. (314)846-0252. Money Orders or C.O.D. BNB340

Continued on page 91

BATTERIES

BUY DIRECT FROM US, THE MANUFACTURER

MasterCharger® I & II



By simply changing adaptor cups, the MasterCharger will charge any Yaesu, Motorola, Icom, Kenwood, Alinco, etc. 2-Way Radio Battery

SPECIAL
FOR THE
MONTH OF AUGUST

10% OFF
on all
STANDARD
Replacement
Batteries

LOOK FOR SEPTEMBER'S
SPECIAL OF THE MONTH
MONTHLY DISCOUNTS
APPLICABLE TO END-USERS ONLY

MasterCharger® 1+1

Electrically Identical to MasterCharger I



If you have two different radios you'll only need one charger to accommodate both radios. Now by simply switching the switch to the left or right, you can determine which charging cup to activate.



NYS residents add 8.5% sales tax. Add \$4.00 for postage and shipping.



Prices and specifications subject to change without notice

W & W ASSOCIATES

800 South Broadway, Hicksville, NY 11801
In U.S.A. & Canada Call Toll Free 800-221-0732
In NY State Call (516) 942-0011 • Fax (516) 942-1944
World Wide Distributorships Available, Please Inquire

MADE IN
THE U.S.A.
SEND FOR
FREE CATALOG
AND PRICE LIST

CIRCLE 191 ON READER SERVICE CARD

New PRODUCTS

Number 27 on your Feedback card

Compiled by Charles Warrington WA1RZW



ICOM

Icom has announced the IC-820H high performance all-mode dual-band base station transceiver for 2 meter and 440 MHz operation. The IC-820H is compact and lightweight, making it ideal for mobile, fixed, or field operation. Yet, this new transceiver is packed with top performance features, including a newly designed DDS capable of resolving 1 Hz tuning steps for fine-tuning.

Built-in satellite functions include normal and reverse tracking, independent uplink/downlink control for Doppler shift compensation and separate satellite VFO. Ten satellite memories allow you to quickly switch from normal to satellite operation.

Independent controls and indicators for each band make the IC-820H easy to operate. Additional features include IF shift, memory allocation, AF speech compressor, auto repeater and one-touch repeater, built-in high stability crystal unit, RIT, CW semi break-in, and side tone.


The suggested retail price is \$1,999. For more information, visit your favorite dealer or contact Icom America, Inc., 2380-116th Avenue N.E., Bellevue, WA 98004; (206) 454-8155. Or circle Reader Service No. 201.

AMATEUR RADIO EXCELLENCE

Amateur Radio Excellence Products has introduced the ARE "Classic" Clock for the ultimate ham shack. Ham operators everywhere will appreciate the Classic's beautiful, original artwork dial, capturing the essence of the Golden Age of radio. The classic represents the finest value available today in a custom-made clock for radio amateurs.

The ARE Classic features a 12- and 24-hour dial, quartz accuracy, and a fully laminated artwork face with the call letters of your choice custom-printed with the art. These beauties are 100% crafted in the USA. The clock frame measures approximately 9" square by 2" deep, and is suitable for desktop display or wall mounting.

The ARE Classic is powered by one AA battery (included), and is gift-boxed




in fine tissue. The dial face is dark brown on light beige; frames are available in simulated light oak, walnut, or black (shown) finishes. Please specify frame and call letters when ordering.

The price is \$39.99 plus \$4.50 shipping in the USA. (Foreign addresses add shipping FPO NH, USA.) For more information or to order contact Amateur Radio Excellence, P.O. Box 1551, Dept. 73, Manchester, NH 03105.

AUTEK RESEARCH

Autek Research has introduced the pocket-sized RF Analyst, designed to check and adjust antennas, feedlines, and RF networks. It includes a microprocessor, A/D converters, and a low-distortion leveled sine wave generator with four-digit readout. This device is continuously adjustable from 1.2 to 35 MHz in five bands. Measurements include RF impedance (0 to 2,000 ohms), SWR (1 to 15:1), C (0 to 9,999 pF), and L (<0.4 to 300 µH). This range of digital readout information is unique in this price range.

The instrument connects to any antenna or feedline for instant readouts. L and C are measured at the frequency of interest, showing the true RF value of these components. Basic accuracy



is 2.5% to 5% over most of its range. The instrument fits into a shirt pocket and runs on a 9 volt battery.

The Autek Research RF Analyst is priced at \$129.95 plus \$6 S&H (US). For more information or to order contact Autek Research, 4143 W. Waters Ave., #120, Tampa, FL 33614; (813) 871-3805. Or circle Reader Service No. 205.



GORDON WEST RADIO SCHOOL

The amateur radio General Class Element 3B question pool has been revised as of July 1, 1994. The new question pool will be valid for four years, and will reflect the exact 288 questions and answers now found on amateur radio General Class tests. All of the Gordon West Radio School books and cassettes have been updated to coincide with this change.

"Only the General Class Element 3B question pool was changed last July," says Gordon West WB6NOA. "All other amateur radio question pools remain exactly the same, and the Advanced Class pool is next for revision in about nine months," adds West.

The new General Class audio cassettes also cover all the new General Class questions. They have been completely updated in stereo to make learning convenient and fun, whether while exercising at home or while driving in the car.

The updated books and cassettes are available at your favorite dealer, or you can order the autographed set direct for \$19.95 plus \$3 S&H. For more information or to order contact Gordon West Radio School Inc., 2414 College Drive, Costa Mesa, CA 92626; (714) 549-5000 (Hot Line 10-4 p.m.); (714) 434-0666 (Info Line 24 hrs.). Or circle Reader Service No. 202.



NAVAL ELECTRONICS, INC.

Naval Electronics has introduced their new all-mode PV-35R VHF Linear Amplifier incorporating a GaAsFET

preamp as well as RF power and supply voltage indicators. The unit provides a maximum output of 35 watts (30 out for 3 in). LEDs show output levels of 10, 20, and 30 watts and, at the same time, power supply variations from 10.5 to 13.8 VDC. This amp works in the FM, CW, AM, and SSB modes.

For more information contact Naval Electronics, Inc., 5417 Jetview Circle, Tampa, FL 33634; (813) 885-6091, FAX (813) 885-3789. Or circle Reader Service No. 203.

ELECTROSOFT

Electrosoft has introduced a program to control the Yaesu FT-990 transceiver. The program works on any PC or compatible equipped with a serial port and requires the FIF-232c interface circuit supplied by Yaesu.

The Electrosoft program reads the frequencies, bandwidth, and mode for both VFOs and for 90 memory channels, then stores the data in a computer file. You can store an unlimited number of channel files. The program can read any previously saved file and reset the frequencies, bandwidths, modes, and scanning information quickly and easily.

The bottom line on the screen shows the command keys used to




edit and the highlighted fields in the four top windows. The program is backed by a money back guarantee and is priced at \$100. For more information or to order contact Electrosoft, P.O. Box 1462, Loveland, CO 80539. Or circle Reader Service No. 204.

WA1FFL

Wire antenna enthusiasts will be interested in a new center support device, the WA1FFL Ladder-Loc for 450 ohm ladder-line antennas. The device is constructed of calcium-reinforced polypropylene and features a built-in strain relief to take the weight off the wire joints at the feed point. It has overlapped construction to keep water out of the sides and is very sturdy.

The Ladder-Loc goes together quickly with two wing nuts; adding a touch of sealant will make it completely weatherproof. The product is priced at



\$11.95 plus shipping. For more information or to order contact Radioware, P.O. Box 1478, Westford, MA 01886; (800) 950-9273. Or circle Reader Service Number 206.

OLD - NEW ELECTRON TUBES FOR SALE, large inventory of old receiving tubes, 2600 in cartons, 200 loose and not cartoned, loose and uncarton are free! Please call for inventory list. Donald Ouellette, 68 East Main St., Fort Kent ME 04743, (207)834-5742 or (207)834-2188 EST. BNB349

HR2510, RCI2950, CONNEX 3300, COBRA 148, GALAXY SATURN, plus many more kits to increase your modulation, \$19.95. (800)536-0109. BNB350

KIT BUILDERS! Complete list of 165+ kit vendors. #10 SASE + \$3.00 USD to: **RUTENBER ENGINEERING**, 38045 10th St. E. #H75-AR, Palmdale CA 93550. BNB365

QSL CARDS — Standard and custom. Your ideas or ours. Excellent quality. Foil stamping available. Many designs and type styles. Catalog and samples \$1.00 refundable. **WILKINS**, Dept. A, Box 787, Atascadero CA 93423. BNB370

CALLSIGN WRISTWATCH - Free details, send SASE. **TLC**, Dept HWA, 9438 Broadway, Temple City CA 91780. BNB379

MANUALS KW940 Owner and Shop manual with schematic, \$20.00; also Heathkit SB220-1 manual and schematic, \$20.00; also NEW 3-500Z, \$85.00. (210)435-6190. BNB381

NEW NN1G CW SUPER-HET SINGLE BAND TRANSCEIVER KIT. Available in 20M, 30M, 40M, 80M. \$59.95 plus \$3.75 S/H. (Catalog-2 Stamps). **DAN'S SMALL PARTS & KITS**, 1935 South 3rd West #1, Missoula MT 59801. BNB385

SERVICE . . . MONITORS . . . WANTED . . .
SERVICE . . . MONITORS . . . WANTED . . .
Any late model . . . Test Equipment. Call, (408)241-7376. BNB390

CW'ers, USN FLAMEPROOF KEY, new, packed 1955, \$59 (shipping included). Collectors, 15 pages, mostly telegraphic, refundable \$2.00 plus 2 Stamps. **Joseph Jacobs**, 60 Seaview Terr., Northport NY 11768. BNB393

IT'S BACK! The return of the HW-8 Handbook! Second printing. Modifications for the Heath QRP rigs. First class mail \$11. DX add \$4 for air mail shipping. **Mike Bryce**, WB8VGE, 2225 Bayflower NW, Massillon OH 44647. BNB404

MAHLON LOOMIS, INVENTOR OF RADIO; (patented 1872) by Thomas Appleby. (Copyright 1967). Available from **JOHAN K.V. SVANHOLM, N3RF, SVANHOLM RESEARCH LABORATORIES**, P.O. Box 81, Washington DC 20044. Please send \$25.00 donation with \$5.00 for S&H. BNB420

BROWNIES QSL CARDS SINCE 1939. Catalog & samples \$1 (refundable with order). 3035 Lehigh Street, Allentown PA 18103. BNB430

BUTTERNUT ANTENNAS, NEW—in box. (2)HF6-VX, \$125.00; (2)HF5B, \$200.00; (2)HF2V, \$110.00; (1)HF7VX, \$150.00. (210)435-6190. BNB435

RADIO DOCTOR VIDEOS for Repair and Alignment of HF Transceivers. Reviewed by Gordon West, January—73 Magazine. Videos for popular KENWOOD, YAESU, and ICOM. **ORDERS: (800)788-1416 MC/VISA**. Catalog: SASE (2 stamps): **RADIO DOCTOR**, 710 Teague Dr., Kennewick WA 98544. BNB442

FREE . . . Harn Radio Gospel Tracts: DX Contact and Christian Helps, SASE: N1GDP, RAR-OFC, P.O. Box 8, Harmony ME 04942. BNB443

CB-TO-10 METERS

We specialize in CB radio modification plans and hardware. Frequency and FM conversion kits, repair books, plans, high-performance accessories. Thousands of satisfied customers since 1976! Catalog \$3.

CBC INTERNATIONAL
LOU FRANKLIN/K6NH Owner
P.O. BOX 31500X, PHOENIX, AZ 85046

TigerTail



- Easy to Use
- Unobtrusive
- Easily Concealed
- Snaps on Handheld
- Weighs only 1.3 oz.
- Adds No Bulk or Height

AntennasWest
Box 9082-S, Provo, UT 84606 1-800-926-7373

See and Hear the Difference

CIRCLE 107 ON READER SERVICE CARD

- Range Extender for 2 meter Handhelds**
- Boosts Signal from Flex & 1-1/4 wave Antennas
 - Lowers Radiation Angle
 - Improves both Receive and Transmit
 - Raises Low Power Performance
 - Saves your Battery Pack
- Order Hotline**
1-800-926-7373

Small Talk

MICRO 1.2 & 2B VOICE RECORDER IDENTIFIERS

FULLY ASSEMBLED IN THE U.S.A. (NOT A KIT), INCLUDING MICROPHONE, SWITCHES AND FULL DOCUMENTATION

- 8KHz SAMPLE RATE
- 5-13.8 DC SUPPLY
- 8 OHM SPEAKER OUTPUT
- LINE AUDIO OUTPUT
- REPEATER/STATION ID.
- GREAT FOR BEACON OR FOX HUNTING
- SAVE YOUR VOICE DURING A CONTEST
- 100 YEAR MEMORY WITHOUT POWER
- EXACT SOUND EMULATION
- 60 SECONDS REC/PLAY



1145 CATALYN STREET SCHEMECTADY, NY 12303

ORDER BY PHONE OR MAIL - IN U.S.A. ADD \$5 FOR S&H + C.O.D. CHARGES APPLY - NY RESIDENTS ADD 7% SALES TAX

TECH. SUPPORT: 518-381-1057
TECH. FAX: 518-381-1058

TO ORDER: CALL 1-(800)-588-4300

REVISED MICRO 1.2

- FITS IN A MICROPHONE
- SMALL SIZE 1-1/4" X 15/16"

MICRO 2B

ADDITIONAL FEATURES

- SMALL SIZE 1-5/16" X 1-5/8" X 1/8"
- MULTI-PRESETS (UP TO 600 MEMORIES)
- VARIABLE AUTO ID TONE
- 5 VOLT KEY OUTPUT
- COR OR SQUELCH KEYED

\$69.95

\$109.95 NEW

CIRCLE 281 ON READER SERVICE CARD

Sell your product in 73 Amateur Radio Today
Call Dan Harper today. . . 1-800-274-7373

"FIBERWHIPS" Mobile HF Antennas

ASA

MODEL	IMTR	MHZ
HFA 6	50.0-54.0	
HFA10	28.0-29.7	
HFA12	24.89-24.99	
HFA15	21.0-21.45	
HFA17	18.1-18.8	
HFA20	14.0-14.35	
HFA30	10.1-10.15	
HFA40	7.0-7.3	
HFA75	3.5-4.0	

MADE IN U.S.A.

\$17.75 EACH

+\$6.00 S&H
(SC Residents Add 5% Sales Tax)
Check in Advance or C.O.D.


HEAVY-GAUGE NICKEL-CHROME BRASS FITTINGS
250 WATTS POWER
APPROX. 8' LENGTH
AVAIL. IN BLACK

ASA

PO Box 3461

Myrtle Beach, SC 29578


1 - 800 - 722 - 2681

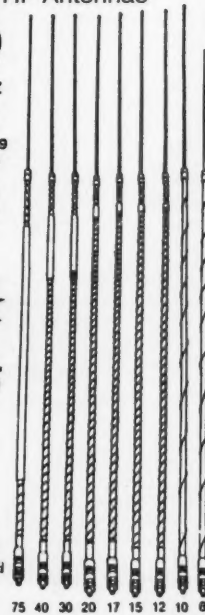

100% Guaranteed

THE ANSWER IS GAP TECHNOLOGY • THE ANSWER IS GAP TECHNOLOGY

Q An Antenna with No Earth Loss?
A Yes... the answer is GAP's revolutionary technology.

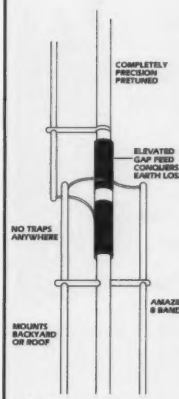

If you're looking for an antenna that can out perform the others and give you the edge, you're looking for a GAP. The Challenger DX-VIII is the revolutionary design that answers your demands for multi-band operation and unequalled efficiency with low noise. This is the technology that eliminates Earth Loss. GAP delivers from an elevated feed; your power doesn't disappear into the ground. Put it up. Turn it on. No tuning. No frustration. GAP delivers everything but the hassles. And — GAP delivers at a fraction of the cost of the "so-called" competition.

The Challenger DX-VIII

10m 15m 20m 30m 40m 60m 80m 120m 160m 220m

\$259
Plus Shipping



5010 Bldg. B
N. Old Dixie Hwy.
Vero Beach, FL 32907

(407) 778-3728

Commercial Frequencies Available

THE ANSWER IS GAP TECHNOLOGY • THE ANSWER IS GAP TECHNOLOGY

TNT FIELD DAY ANTENNA
complete, assembled ready to use.

No pruning. TNT is No-tune on 80, 40, 20, 17, 12, 10. TNT/2 is No-tune on 40, 20, 10. Work other bands w/ tuner. DX & Gain rise w/ frequency. Kink-proof. No Traps or Resistors. Wx-Scaloid. Insulated to 3000 V. Rated 500 Watts. Low Noise.

TNT Window \$89.95 + \$8 P&H
135ft. long

TNT/2 Window \$79.95 + \$7 P&H
67 ft. long

Antennas West
Box 50062S, Provo, UT 84605
Order hotline 801-373-8425

CIRCLE 135 ON READER SERVICE CARD

"ONLINE" U.S. & INTERNATIONAL
CALL DIRECTORY
OVER A MILLION CALL SIGNS

Hamcall online service gives you ALL hams via your computer & modem. Updated each month! Only \$29.95 per year. Unlimited use - 24 hours a day - you pay for the phone call.

800-282-5628 • 703-894-5777 • FAX 703-894-9141

BUCKMASTER
Route 4, Box 1630
Mineral, Virginia 23117
Internet: info@buck.com

MasterCard **VISA**

CIRCLE 7 ON READER SERVICE CARD

LAMBDA POWER SUPPLIES Linear, 5V 3 Amp, \$4.00 each; or 12V 1 1/2 Amp, \$4.00 each, 1156 Primary pulls. 4 3/4H x 4W x 1 5/8D. Guaranteed.

KALTECH ELECTRONICS, 200 S.W. 20th St., Ft. Lauderdale FL 33315, (305)522-5811. UPS, COD or Check. BNB453

GOOD DX LOCATION on the second highest hill on the East Coast. Four bedroom yellow brick house, overlooking Sandy Hook Bay, 65' military type tower. Call (304)462-5575. BNB505

CRYSTALS: High quality for your VHF/UHF and SHF transverter projects. SASE. WA3IAC, 7148 Montague St., Philadelphia PA 19135. BNB515

CELLULAR PHONE PROGRAMMING PACKAGE! Program/Reprogram cellular phone (s). Change ESN and NAM. Change or Clone ALL. \$200.00 Complete. Call (419)351-7713. BNB520

CDROM-94 HAM RADIO CALLSIGN DATA BASE Ham Radio Callsign Database with hundreds of PC Compatible programs, radio mods, TCP/IP Usenet, Ham Radio Archives, FCC Rules & Regulations, current exam question pools, and Canadian Call Signs. Only \$24.95, with Windows/DOS Interface. Includes shipping! Send check to: **CDROM**, 2348 Karen Dr., #6, Santa Clara CA 95050 or call (408)241-7376 with your Visa or MC. BNB540

DACRON ROPE, WHY RISK FAILURES with aerial supports? Strong, high UV resistant, non-stretch Military Type black DOUBLE (unlike our competitors' single) braided Dacron. 3/32": \$.06/ft., 3/16" (770 lb. test): \$.11/ft., 5/16": \$.16/ft. **DAVIS RF CO.** 24 HOUR ORDERS: (800)328-4773. BNB557

HF TRANSCEIVER, IC-781, mint, in Box, only used 10 hours, manuals included, \$3,700.00. Mike Temperino, 855 Leyte Ct., San Jose CA 95111. (408)227-7460 after 6 p.m. BNB590

DON'T BUY QSL CARDS UNTIL YOU SEE MY FREE SAMPLES. Also I specialize in custom cards and QSL business cards. Write or call for free samples and custom card ordering information. **LITTLE PRINT SHOP**, Box 1160, Plügerville TX 78660. (512)990-1192. Mastercard and Visa now accepted. BNB595

WANTED: Western Electric tubes and other tube audio equipment. (800)251-5454. BNB615

DUPLEXER TUNING GUIDE. A complete booklet showing step-by-step instructions on tuning all types of duplexers. Included is theory of operation, detailed diagrams and much more. Send \$9.95 plus \$2.50 s&h to **RGM PUBLICATIONS**, 533 Main Street, Hillsboro NM 88042. For faster service using a major credit card call (505)895-5333 and order today. 30 day money back guarantee. BNB635

SATELLITE EQUIPMENT Best \$\$\$ USA. (800)851-6534. BNB640

UNIVERSAL PROGRAMMERS Data IO, XELTEK, Logic Devices, Magic IO, EETools, Needhams, from \$399.00. EPROM programmers from \$117. Call for free catalog. (408)241-7376. BNB645

VHF-UHF-SHF Large SASE. **VHFer**, P.O. Box 685, Holbrook AZ 86025. BNB660

QSLs—ELEGANT, AFFORDABLE. Samples \$1 (refundable with order). **AACO**, Dept. S48, 1639 Fordham Way, Mountain View CA 94040. BNB670

HAM RADIO REPAIR—All makes and models. Fast, Professional Service. **AFFORDABLE ELECTRONIC REPAIR**, 7110 E. Thomas Rd., Scottsdale AZ 85251. (602)945-3908. BNB700

SELL YOUR PRODUCT IN 73 MAGAZINE CALL DAN HARPER 800-274-7373

▼ ELECTROMAGNETIC FIELD METER ▼

Reduce exposure to potentially harmful electromagnetic fields. AlphaLab's handheld TriField™ Meter measures AC electric fields, AC magnetic fields and radio/microwave power density. Find ground faults, AC current wires or measure high-field generators with the **Magnetic** setting (.2 – 100 milligauss, 60 Hz); identify poorly grounded or shielded equipment, high VDT or fluorescent light fields, distinguish hot vs. ground wires with **Electric** setting (.5 – 100 kV/m, 60 Hz); measure antenna radiation patterns, leaky microwave ovens, etc. on **RF/microwave** setting (50 MHz to 3 GHz, .01 to 1 mW/cm²).

Electric and magnetic settings are omnidirectional, measuring full magnitude of fields without the need to reorient the meter. Price of \$145 includes delivery and one-year warranty.

AlphaLab, 1272 Alameda Ave, Salt Lake City, UT 84102
Call (801) 532-6604 for speedier service or free literature on electromagnetic radiation health risks.



NEW TRIDENT

TRIDENT TR1200 Scanning Receiver

500KHz to 1300MHz with AM/FM/WFM Coverage rivaling that of receivers that cost twice as much. Extremely compact and versatile. Features 1000 memory channels, 10 search banks, lockout on scan, and search. Backlighted LCD display, Attenuator, Delay, Hold, Bank lockout, Cellular locked out, 1 Year Warranty, & Earphone jack. Size: 5 7/8H x 1 1/2D x 2 1/3W. Wt 14oz. Ground shipping: \$6.95. 2 Day Air Freight: \$9.95. Call or Fax Toll Free, 24 hours



ACE
COMMUNICATIONS



Call
1-800-445-7717

10707 E. 106th Street Fishers, IN 46038
317-842-7115 Fax 1-800-448-1084

CIRCLE 164 ON READER SERVICE CARD

RACK BOXES NEW DEEPER SIZES

MODEL	DESCRIPTION	PRICE	MODEL	DESCRIPTION	PRICE
1RU5	19 x 5 x 1.75	34.00	2RU12	19 x 12 x 3.5	46.25
1RU7	19 x 7 x 1.75	36.50	2RU15	19 x 15 x 3.5	48.25
1RU10	19 x 10 x 1.75	38.75	2RU17	19 x 17 x 3.5	51.25
1RU12	19 x 12 x 1.75	42.75	2RU22	19 x 22 x 3.5	46.00
1RU15	19 x 15 x 1.75	42.75	2RU17	19 x 17 x 5.25	48.00
1RU17	19 x 17 x 1.75	46.75	3RU10	19 x 10 x 5.25	51.00
2RU5	19 x 5 x 3.5	36.50	3RU12	19 x 12 x 5.25	54.00
2RU7	19 x 7 x 3.5	38.75	3RU15	19 x 15 x 5.25	57.00
2RU10	19 x 10 x 3.5	41.25	3RU17	19 x 17 x 5.25	60.00

PREPAID ORDERS SHIP GROUND FREE (48 STATES)
SESCOM, INC.
2100 WARD DR., HENDERSON, NV 89015 USA
US/CANADA (800) 634-3457 FAX (800) 551-2749
OFFICE (702) 565-3400 FAX (702) 565-4828
TECH LINE: (702) 565-3955 9A-7P 8 am to 4 pm (PST)
We ship and deliver to all parts of the world. Prices subject to change without notice.

CIRCLE 167 ON READER SERVICE CARD

PERSONAL COMPUTER REPEATER CONTROLLER
PCRC

Speaks for Itself

- ✓ Full Duplex Autopatch
- ✓ 911 Emergency Access
- ✓ Reverse Autopatch
- ✓ Voice Mail
- ✓ Voice ID's
- ✓ Toll Restriction
- ✓ BSR X10
- ✓ Voice/Tone/DTMF Paging
- ✓ Scheduler
- ✓ Links
- ✓ Programmable Courtesy Tones
- ✓ Hardware Logic I/O
- ✓ HF Remote Control
- ✓ Morse Code Practice
- ✓ Remote Base

PCRC/2 Combines the power of your XT/AT platform with a high quality play and record voice digitizer creating the ultimate repeater controller.

516-563-4715 *from \$695*

Fax: 563-4716 BBS: 286-1518

MasterCard **VISA**

CIRCLE 198 ON READER SERVICE CARD

ROSS' \$\$\$\$ NEW AUGUST (ONLY) SPECIALS. SAVE TIME AND MONEY HAVE MODEL NUMBER AND MANUFACTURER READY WHEN YOU CALL OR WRITE. KENWOOD, IF-10A, \$69.50; PB-12, \$50.00; TH-41BT, \$220.00; TH-205AT, \$250.00; MFJ 1228, \$44.90; 1229, \$129.90; 840, \$16.00; 815B, \$50.00; ALINCO CALL; YAESU CALL; ICOM AG-35, \$130.00; 707, \$800.00; AG-1, \$80.00; BC-50, \$35.00; 04AT, \$250.00; BP-70, \$52.00; CALLBOOK OUT DATED, \$15.00; SUPPLEMENT, \$4.50; BENCHER CALL; BUTTERNUT CALL; CUSHCRAFT R-7, \$342.50; CALL FOR MORE; TELEX HY-GAIN, T2X, \$360.00; CD-45II, \$225.00; RF CONCEPTS CALL; MIRAGE CALL; LARSEN CALL. LIMITED TIME OFFERS. LOOKING FOR SOMETHING NOT LISTED OR HARD TO FIND? CALL OR WRITE. OVER 9000 ham-related items in stock for immediate shipment. Mention ad. Prices cash, F.O.B. Preston. HOURS TUESDAY-FRIDAY 9:00 TO 6:00, 9:00-2:00 P.M. MONDAYS. CLOSED SATURDAY & SUNDAY. **ROSS DISTRIBUTING COMPANY**, 78 SOUTH STATE, PRESTON ID 83263. (208)852-0830. BNB707

ELECTRON TUBES: All types and sizes. Transmitting, receiving, microwave . . . Large inventory = same day shipping. **DAILY ELECTRONICS**, 10914 NE 39th ST. Suite B-6, Vancouver, WA 98682. (800)346-6667 or (206)896-8856. BNB719

MINIATURE POLICE RADAR TRANSMITTER One mile range, \$41 assembled, \$31.00 kit. 9025 Coldwater Rd. Bldg. 100A, Fort Wayne IN 46825. BNB725

HAM RADIO REPAIR—Prompt service. **ROBERT HALL ELECTRONICS**, 1660 McKee Rd., Suite A, San Jose CA 95116. (408)729-8200. BNB751

GET YOUR "FCC COMMERCIAL GENERAL RADIODIATELEPHONE LICENSE". Electronics Home Study. Fast, inexpensive! "Free" details. **COMMAND PRODUCTIONS**, D-174, Box 2824, San Francisco CA 94126-2824. BNB761

WANTED: HAM EQUIPMENT AND OTHER PROPERTY. The Radio Club of Junior High School 22 NYC, Inc. is not only the Big Apple's largest Ham club but also the nation's only full time, non-profit organization, working to get Ham Radio into schools around the country as a theme for teaching using our EDUCOM-Education Thru Communication-program. Send your radio to school. Your donated amateur or related property, which will be picked up or shipping arranged, means a tax deduction to the full extent of the law for us as we are an IRS 501 (c) (3) charity in our fourteenth year of service. Your help will also mean a whole new world of educational opportunity for children around the country. Radios you can write off, kids you can't. Enjoy the coming fall season by helping someone else and yourself. Please, write-phone-or FAX the WB2JKJ "22 Crew" today: The RC of JHS 22, P.O. Box 1052, New York NY 10002. Telephone (516)674-4072 or FAX (516)674-9600. Young people, nationwide, can get high on Ham Radio with your help. Meet us on the WB2JKJ CLASSROOM NET: 7.238 MHz. 1100-1230 UTC and 21.395 MHz. 1300-1900 daily. BNB762

JOIN TAPR-TUCSON AMATEUR PACKET RADIO Support the development of new communications technology. Benefits: newsletter, software/shareware, discount on kits and publications. \$15/year, Visa/MC accepted. When joining, mention 73, receive Packet Radio General Info booklet (\$7 value!) (817)383-0000. Mail:8987-309 E. Tanque Verde Rd. #337, Tucson AZ 85749-9399. BNB765

FOX TANGO NEWSLETTER Collectors Editions. Call for years available, entire library, \$30.00. Great for Yaesu enthusiast. **INTERNATIONAL RADIO & COMPUTER, INC.** (407)489-5609. BNB776

THE 4SOTRON
COMPACT ANTENNAS FROM 160-10 METERS

NO TUNERS
NO RADIALS
NO RESISTORS
NO COMPROMISE

FIVE EXCELLENT REVIEWS JUST DON'T HAPPEN BY CHANCE CALL US FOR A FREE CATALOG.

*See review in Oct. 73, 1984 *Sept. 73, 1985
CQ, Dec. 1988 Mar. W.R. 91

BILAL COMPANY
137 Manchester Drive
Florissant, Colorado 80616
(719) 587-0550

CIRCLE 42 ON READER SERVICE CARD

Field Day G5RV QuickKits™
created by Antennas West, Box 50063-S, Provo, UT 84605

Fast & Easy To Build
• Full-Safe Visual Instructions
• No measuring or cutting
• Everything Included
• Finish antennas in minutes

Quality Components
• Presoldered Silver Filings
• Kinkproof QuietFlex wire
• Fully insulated, wax sealed, no-corrode, low noise design
• Tune All Bands Incl WARC

Want Plans, Patterns, Data? Order TechInfo #129-0 \$6.50 p/d USA

• Double Size G5RV \$59.95
• 204 ft. 160-10 Dipole
• Full Size G5RV \$39.95
• 102 ft. 80-10 Dipole
• Half Size G5RV \$29.95
• 51 ft. 40-10 dipole
• Quarter Size G5RV \$25.95
• 26 ft. 20-10 Dipole
• Ready-Made 102 ft. G5RV \$50.00
• Ready-Made 51 ft. G5RV \$24.00
• 200' Dacron 2500 line \$11.95

Order: Hot-Line: Add \$5 P&H
1-801-373-8435

CIRCLE 296 ON READER SERVICE CARD

Pocket Morse Code Trainer



Made in USA

**Learn Code Faster & Easier
Better than Code tapes
Ideal for Beginners to Advance
Take it anywhere to practice**

Only! \$29.00

- Selectable code rates from 3 wpm to 23 wpm
- 3 Random code modes
Continous random code mode
Preprogrammed code mode for checking accuracy
Interactive code training
- Selectable letter groups for faster learning
- Runs up to 16 hours on one 9 volt battery
- Dimensions 1" x 3.8" x 2.4" Add \$5.00 for S/H

Computer Aided Technology, Inc, 10132 Monroe Dr, Dallas, Tx 75229, Call 214-350-0888, Visa/MC Accepted

CIRCLE 276 ON READER SERVICE CARD

SPY ON THE EARTH

See live on your PC what satellites in orbit see

Capture five breathtaking images of the Earth for fun or profit. Zoom in up to 20X. Send \$39 check or M.O. (\$45 air, \$50 overseas) for our fantastic 12 diskette set of professional quality copyrighted programs (IBM type) that does satellite tracking, image acquisition, image processing, 3-D projections and more. Direct reception from the satellites guaranteed worldwide without a satellite dish. Schematics included for interface. For FREE information log-on to our bulletin board anytime at: (718) 740-3911.

VANGUARD Electronic Labs
Dept. RF, 196-23 Jamaica Ave.
Hollis, NY 11423 Tel.718-468-2720

LOGIC 4
HAM RADIO SOFTWARE

The ultimate in ham radio software! Complete logging, online awards tracking, QSL management facility, radio interfacing, antenna rotor control, data terminal for all digital modes, unequalled packet spotting, contesting, CW keyer, sound card support, full mouse support, customizable screens and reports, superb documentation and tech support, grayscale propagation chart, interface to callbook databases, and much more. Specs: IBM 386SX, 4mb RAM, hard drive. LOGIC 4 DOS \$79, Windows \$99. LOGIC Jr DOS \$39, Windows \$49. Foreign shipping extra. visamc. Free Info! Also available: PDA QSL Route List, Radio interface hardware, Keyer interface hardware.

Personal Database Applications, Dept 7, 2618 Meadow Ridge Dr., Duluth, GA 30136. Ph. 404-242-0887. Fax 404-449-6887 Tech supp. 404-417-1899. 9-6 M-Th, 8-noon Fri.

Windows or DOS!

Say You Saw It In
73 Amateur Radio Today

ICOM BATTERY INSERTS

BP-3	8.4v	270mah	\$14.00
BP-3	8.4v	400mah	\$21.00
BP-5	10.8v	600mah	\$20.00
BP-7	13.2v	600mah	\$23.00
BP-8	8.4v	800mah	\$19.00
BP-8	8.4v	1400mah	\$24.00
BP-22	8.4v	270mah	\$21.00
BP-23	8.4v	600mah	\$17.00
BP-24	10.8v	600mah	\$19.00

KENWOOD BATTERY INSERTS

PB-21	7.2v	200mah	\$11.00
PB-2400	9.6v	800mah	\$19.00
PB-25/26	8.4v	600mah	\$21.50

YAESU BATTERY INSERTS

FNB-2	10.8v	600mah	\$19.95
FNB-4/4A	12v	600mah	\$26.00
FNB-10	7.2v	600mah	\$15.00
FNB-12	12v	600mah	\$25.00

MORE BATTERY INSERTS

Tempo S1 Early	270mah	\$19.00
Tempo S2/4/5 Late	600mah	\$21.00
Standard BP-1	270mah	\$21.00
Ten-Tec BP-1	600mah	\$21.00
San-Tec #142#144 Tabs	600mah	\$15.00
Uniden Bearcat	600mah	\$15.00
Uniden Bearcat	800mah	\$19.00
Regency MT1000 Tabs	600mah	\$15.00

* Add \$4.00 Shipping * FL residents add 7% Sales Tax

TNR The Battery Store
279 Douglas Ave., Suite 1112
Altamonte Springs, FL 32714
1-800-346-0601 FAX (407) 682-4469

CIRCLE 374 ON READER SERVICE CARD

Pico-J rolls up and hides in his 4-ounce pocket-sized holder, sealing like the genie in a bottle till you need full-questing signal pouch.

Call him forth and his glistering black weather sealed lines reveal a sleek and-led hardware antenna ready to hang anywhere. Suspend in the apartment closet or patio doorway. Attach Pico-J to window glass or curtain rod. He needs no radials for broadband low-angle omni halfwave gain.

Carry Pico-J with you for emergencies. Hang in the motel when on the road. He improves range, boosts reception, saves batteries. Pico-J comes ready for work with 72" isolated coax feedline and gold pin BNC. Typical edge-to-edge SWR under 1.2:1. Hand-crafted in the U.S.A.

Info 31
Bor 80005-D
Provo, UT
84050

Models
2 Meters
440MHz
Dual Band \$8

Antennas West
Order Hotline
801-373-8425

19.95

CIRCLE 89 ON READER SERVICE CARD

Pico-J

PAY TV AND SATELLITE DESCRAMBLING 1994
NEW...free BBS with sub to American Hacker...New Titles

Pay TV and Satellite Descrambling 1994 includes latest cable box and satellite fixes. Schematics, turn-ons, bypasses, chip files, bullets, ECMs, etc. Our best yet. Other Pay TV editions, volumes 1-5 (all different). The Complete Wizard (Videographer's edition). Wireless Cable Hacking. Build Satellite Systems Under \$700 (includes DBS). Hacker Video. All the above \$15.95 each, \$334.95 or \$352.95. American Hacker monthly now includes cable, satellite, computers, phones and BBS. \$29.95/yr. All our info, not all listed. (except Euro) \$129.95. New Title. European Scrambling Systems. 480 pages. \$30.95. New catalog \$1.

SCRAMBLING NEWS

1552 Hertel Ave., #123, Buffalo, NY 14216
Voice/FAX/BBS-716-874-2088 C.O.D.'s are OK. Add \$6

CIRCLE 36 ON READER SERVICE CARD

AMIGA AND COMMODORE SUPPORT SERVICES CTM

Now utilize the same repair facilities used by dealers and other Commodore service centers. Take advantage of direct low pricing, fast turn-around (24-48 hours), extended warranties, service contracts, low-cost system upgrades (such as 1 MB Agnus), Toaster problems and most important —PROFESSIONAL SERVICE.

CALL FOR RETURN AUTHORIZATION NUMBER

GLOBAL UPGRADES, INC.

3 CHESTNUT STREET, SUFFERN, N.Y. 10901
914-357-7339 • FAX: 914-357-6243

1-800-426-8693

HOURS: 9 A.M. - 5 P.M. - FRI.

MasterCard VISA DISCOVER

**** AMIGA & COMMODORE CHIPS ****

Commodore Plug-In Chips	
6510 CPU	\$9.95
6526 CIA	\$9.95
Amiga Plug-In Chips	
8520A CIA	\$7.95
8520 PLCC (A4000)	\$14.95
8362/8364	\$11.95
5719 Gary	\$11.95
8372/8375 Agnus with diagnostic disk	\$32.95
Plus all Commodore and Amiga POWER SUPPLIES	CALL

COST OF SERVICES*

AMIGA		COMMODORE	
FLAT RATE LABOR		FLAT RATE LABOR	
A500	\$55	A3000	\$120
A2000	\$85	A4000	\$150
*PLUS UPS SHIPPING		CDTV	
		\$60	

CALL FOR PRICING ON MONITOR REPAIR & OTHER ITEMS WE SERVICE

CIRCLE 338 ON READERS SERVICE CARD

Sell Your New & Used Gear In BARTER 'N' BUY

Classified Ads Work! Call Judy Walker today. 1-800-274-7373

How To Get Started In Packet Radio



Enter the exciting world of packet radio today with *How To Get Started In Packet Radio*. Dave Ingram, K4TWJ, wrote this beginner's guide to packet radio in an easy-to-understand manner. It starts with a non-technical description of packet radio, followed by chapters that include getting started, setting up your station, networks, BBSs, portable and high-frequency operation and even a *Packet Radio Equipment Survey*. There's also an appendix that includes circuits for interfacing equipment. Join the most exciting and rapidly growing area of ham radio today! Order your copy of *How To Get Started In Packet Radio* book for only \$9.95! (plus \$2.00 S&H).

NARA
NATIONAL AMATEUR RADIO ASSOCIATION

P.O. Box 598, Remond, WA 98073

Orders Only 1-800-GOT-2-HAM

Inquiries (206) 869-8052

CIRCLE 223 ON READER SERVICE CARD

CALL US
TODAY!!

Deluxe... Tejas KitsTM
Mini-Keyer\$39.95 + S&H
AF Filter\$29.95 + S&H
Kits, Kits and more Kits!
Tejas KitsTM Box 720331
Houston, Texas 77272-0331

HamCall CD-ROM


US & International Callsign Lookup
Over 1,000,000 listings and 100 Countries



Includes U.S. Clubs & Military Stations.
ICALL program looks up: name, address, expiration date, birth year, license class, county, lat/long, area code, time zone, & elevation. Retrieve by any data element on PC, call, name and zip on the MAC.

Hundreds of new programs are on this disc—see the Electronics Software Compendium CD-ROM for a larger collection of software.

No hard disk required • Print Labels • Export to hard/disk or floppy • TSR runs from text window • Updated every April & Oct • Standing orders accepted • Dealer discounts for 6 or more • Latest public domain PC & MAC software. Same low price of \$50.00 plus \$5.00 shipping.



New CD-Rom Electronics Software Compendium

The Electronics Software Compendium is a collection of programs and data files that pertain to electronics, broadcasting, amateur radio and SWL activity.

Over 15,000 files in total. The disc is updated and issued semi annually in April & Oct. Over 200 megabytes of material is resident on this CD-ROM, for MAC & PC. Send your order to Buckmaster Publishing, \$25.00 plus \$5.00 shipping.

Route 4, Box 1630 • Mineral, VA 23117

703-894-5777

800-282-5628

703-894-9141(Fax)

Internet: info@buck.com



CIRCLE 56 ON READER SERVICE CARD

MINIATURE MORSE KEYS. Ideal collector's item. Individually boxed. Ex-South African Military. Limited stock available, \$25.00 plus \$3.00 shipping. Payment by Visa, MasterCard or bank draft. Contact: MARC, ZS6HZ, LIMA ELECTRONICS, P.O. Box 707, Bergville, 2012, Republic of South Africa; or 27-11-444-0444 (phone), 27-11-444-0459 (FAX).

BNB768

SERIOUS ABOUT SOLAR POWER? The PVSP starter kit comes with a 32 watt Solarex VLX panel and a ten amp Sunlogic charge controller. Special introductory price \$275 plus \$7 shipping. SUN-LIGHT ENERGY SYSTEMS, 2225 Mayflower NW, Massillon OH 44647.

BNB774

LET ME SHOW YOU the tips and techniques of amateur astronomy. CLEAR SKIES QUARTERLY NEWSLETTER, \$19.00. MC/VISA/AMEX, (800)501-3003.

BNB790

AGGRESSIVE SALES REPRESENTATIVE seeking additional employment. Would like to sell amateur radio equipment. (910)299-1298. BNB800 R-390A—SALES—SERVICE—PARTS. Info SASE: MILTRONIX, P.O. Box 3541, Toledo OH 43608.

BNB813

FREE IBM SHAREWARE AND HAM CATALOG. Morse Code Computer Interfaces, \$49.95. DYNAMIC ELECTRONICS, Box 896, Hartselle AL 35640. (205)773-2758, FAX (205)773-7295.

BNB815

MORSE CODE MUSIC! Do Aerobics, Sing, or Jog, while learning code! Sensational new discovery and now the secret is yours! Order THE RHYTHM OF THE CODE cassette today! \$9.95 ppd KAWA RECORDS P.O. Box 319-S, Weymouth, MA 02188. The HIT of the Dayton Hamvention! BNB824

OVER 3500 AMATEURS WORLDWIDE ARE using Bandmaster Quad Antennas. Discover why. Free catalog. AAE, 3164 Cahaba Heights Rd., Birmingham AL 35243. (205)967-6122, (205)970-0622 FAX.

BNB830

THE ANARCHIST'S BBS is a resource for anarchists, investigators, researchers, computer hackers and phone phreaks. Categories include: Computer hacking, investigation techniques, Telecommunications technology and Surveillance. Call (214)289-8328 for free trial access.

BNB831

FCC COMMERCIAL LICENSE PREPARATION RADIOTELEPHONE-RADIOTELEGRAPH. Latest home study fast easy audio video. Q & A pool disks. FREE details WPT PUBLICATIONS (800)800-7588. BNB840

ELECTRONICS GRAB BAG! 500 pieces of new components: inductors, capacitors, diodes, resistors. \$5.00 postpaid. ALLTRONICS, 2300 Zanker Rd., San Jose CA 95131.

BNB855

WANTED: COLLINS ANTIQUES, anything old from, speakers, receivers, transmitters, and all accessories, any condition. Top \$\$\$ paid. Rick. (800)462-2972 anytime.

BNB865

SGC, INC., an HF SSB radio manufacturer has openings for technical sales and support persons. Must have general class license, good verbal and written skills. Knowledge of marketing, dealer networks and marine industry helpful. Must be willing to travel. Send employment resume and salary history to: SGC, INC., PO Box 3526, Bellevue WA 98009 USA.

BNB880

CRYSTAL SET HANDBOOK now available from the Xtal Set Society. Includes projects, formulas, and 3 issues of our newsletter, \$12.95. Join the

XTAL SET SOCIETY and receive 6 bi-monthly newsletters, \$9.95. Remit to: P.O. Box 3026, St. Louis MO 63130. BNB885

UNINTERRUPTED MUSIC, news networks, sports feeds, newspaper reading for sight impaired, and computer data are available from FM subcarriers. for FREE brochure of subcarrier (SCA/SAP) receivers and other radio devices, write: **AJL ENTERPRISES**, P.O. Box 5354, High Point NC 27622. BNB899

SCHEMATIC DESIGN PROGRAM. Free brochure, write Dept. 7, **SCHEME-ADDICT**, 8622 West 44th Place, Wheat Ridge CO 80033. BNB905

WANTED: BUY AND SELL All types of Electron Tubes. Call (612)429-9397, Fax (612)429-0292. **C & N ELECTRONICS**, Harold Bramstedt, 6104 Egg Lake Road, Hugo MN 55038. BNB915

COMMODORE 64 HAM PROGRAMS-8 disk sides over 200 Ham programs \$16.95/\$29 stamp gets unusual software catalog of Utilities, Games, Adult and British Disks. **HOME-SPUN SOFTWARE**, Box 1064-BB, Estero FL 33928. BNB917

HERO ROBOT AND ROBOTIC EQUIPMENT OWNERS: board repairs, IC programming and assorted pre-programmed speech chips. For additional requests contact: **ELECTRONIC REPAIR**, 2927 East Washington Ave., Madison WI 53704, (608)249-5577. BNB920

RADIO REPAIR Amateur and commercial, professional work. Fred Fisher WF9Q, 6866 W. River Rd., South Whitley IN 46787. (219)723-4435. BNB930

SERVICE . . . MONITORS . . . WANTED . . . SERVICE . . . MONITORS . . . WANTED . . . Any late model . . . Test Equipment. . . . Call, (408)241-7376. BNB945

RF TRANSISTORS, Japanese transistors and tubes need dealers, repair shops, kit makers, etc. for 2SC1969, 2SC2312, MB8719, MRF455, MRF454, 2SC2879 and more. **WESTGATE** (800)213-4563. BNB950

FREE HAM GOSPEL TRACTS. SASE. N3FTT, 5133 Gramercy, Clifton Heights PA 19018. BNB960

PRINTED CIRCUIT BOARDS for projects in 73, *Ham Radio*, *QST*, *ARRL Handbook*. List SASE. **FAR CIRCUITS**, 18N640 Field Ct., Dundee IL 60118. BNB966

HANDY TALKY CASES, black or camouflage, \$8.95; personalized, \$14.95; desk stands, \$8.95; specify make & model, add \$8.00 for s/h. Send SASE for catalog. **R. THOMSON**, 165 Wellington St. West, Suite 28010, Barrie, Ontario, Canada, L4N7W1. BNB967

HAM RADIO CDROMS Plus 800 other CDROM titles. Call (717)560-2321 for FREE info. KA3VXA, **DISCOUNT DATA**. BB970

AZDEN SERVICE by former factory technician. **SOUTHERN TECHNOLOGIES AMATEUR RADIO, INC.**, 10715 SW 190 St. #9, Miami FL 33157. (305)238-3327. BNB979

KC5DWK MAKES SELF INKING STAMPS for hams with your address and call sign. Send \$14.95 with your order & phone number to **SCRS**, Box 4550, Pasadena TX 77502. BNB980

ROTOR PARTS ROTOR SERVICE, ROTOR accessories: Brak-D-Lays, Quik-Connects, Pre-Set mods. NEW models for sale. Free catalog. **C.A.T.S.**, 7368 State Road 105, Pemberville OH 43450. BNB996

NEW Fox Hunt Attenuator NEW

only \$49.95

Arrow Antenna
1461 Peacock Pl. evenings (303)663-5485
Loveland, CO 80537 Fax (303)663-5065

CIRCLE 80 ON READER SERVICE CARD

Where's the Beam?

Unobtrusive DX Gain Antennas for 80 thru 10
• Easily hidden • Install Fast • Fixed or Portable •

There's a 20 meter antenna with real DX Punch hidden in this picture. You can't see it, and your neighbors can't either. But it works DX barefoot anyway. How about a low profile 80-40-30 m-bander? Or a 2 element monobander for the attic? All easily fit the pocketbook. Priced \$30 to \$99.

Work DX without telling the neighbors
Inexpack \$1 AntennasWest
Box 50062-R, Provo, UT 84605 (801) 373-8425

CIRCLE 332 ON READER SERVICE CARD

Satellite Imagery

Low Price, Advanced Full-Featured Software and Hardware Solutions

OFS WeatherFAX High Performance Satellite Weather

Phone/Fax (919) 847-4545

VISA MasterCard

6404 Lakewood Ct. Raleigh, NC 27612

The Best in PC based High Quality API Weather Satellite Imagery


X Advanced Capture Board
Removes Doppler bending
Self test modes verify operation
FCC Part 15 Class B certified
Contains both AM and FM decoders
Ultra fast 2us A/D converter
Automatic Gain Lock (AGL)
Maintains Frame Sync

X Full Function Software
Stand alone animation
Ephemeris based worldwide geographical map and latitude longitude overlay
Distance & direction measurement tool
Extensive image processing tool box

Sell Your New & Used Gear in BARTER 'N' BUY
Classified Ads Work! Call Judy Walker today. 1-800-274-7373

HF mobileer's "dream" antenna!

The **HIGH SIERRA** antenna:
Operate anywhere from 3.5MHz to 30MHz without leaving your car. "Monoband" performance!

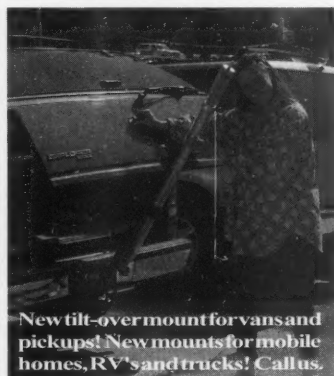

New tilt-over mount for vans and pickups! New mounts for mobile homes, RV's and trucks! Call us.

\$289 plus S&H VISA/MC
(mounts and whips sold separately)

High Sierra Antennas

Box 2389
Nevada City, CA
95959 USA

Tel: 916-273-3415
Fax: 916-273-7561

Brochure Available

CIRCLE 87 ON READER SERVICE CARD

KABULU **WB8ELK/m**

VIDEO I.D. BOARD

- Custom Graphics with your Call Sign
- 4 Screens (2 Hi-res/2 color bar)
- 12 VDC Operation
- Instant Video ID
- Video Relay for switching in Live Camera Video
- Built-in Automatic Sequencer-Timer (steps through all four screens)

VDG-1 with pre-programmed calls: \$99

Call or write for catalog of available graphics

ELKTRONICS
12536 T.R. 77 • Findlay, OH 45840
(419) 422-8206

WPSK **ELKTRONICS**
12536 T.R. 77
Findlay, OH 45840
(419) 422-8206

KABLWB-WB8ELK **KABULU**
When the RTV's
start your instant

VIDEO I.D. BOARD

CIRCLE 8 ON READER SERVICE CARD

RANDOM OUTPUT

Number 28 on your Feedback card

David Cassidy N1GPH

Another Ham Scam

The history of amateur radio has been frequently marked with people trying to make a buck. I'm not talking about legitimate businesses that sell products or services to the ham community. I'm talking about the periodic attempt by some less-than-legitimate characters to take advantage of hams. The most recent to come to my attention is interesting only because of who is behind it.

I received a fax from an amateur in Texas that contained the contents of a mailing he received from The W5YI Group. The outside envelope was emblazoned with all kinds of large and alarming messages like "Urgent Alert!" and "Your Amateur Radio License Is About To Expire!" Inside was a Form 610 with the instructions removed, a separate sheet of instructions and a letter/order form warning of the eminent expiration of the recipient's amateur radio license. Fred Maia W5YI explains in this letter

makes it all OK, save it. I don't care how many carefully-worded phrases The W5YI Group puts into the letter, the purpose of this package is to get \$5 from as many hams as possible. The W5YI Group is a business, and like any business they have the right to make a fair profit from their efforts. This particular effort is sleazy. How many elderly hams will receive this package and send out the \$5, thinking they narrowly escaped losing something that brings joy and companionship into their lives? Fred, you should be ashamed of yourself.

Is this \$5 license renewal scheme illegal? No, probably not. After all, that disclaimer is in there. It's enough to save any investigation from the bunks squad. There is a very large difference between what is legal and what is moral. What is legal is defined by law. What is moral is defined by your own heart. We all have to make our own decision as to

"When obtained from a legitimate source, the FCC Form 610 includes sufficient instructions to renew your license."

that he is such a nice guy that he just thought he'd remind you of the upcoming expiration of your license and give you the chance to renew it through his company for a measly \$5.

Wait a minute. I thought there was no fee involved with an amateur radio license. Oh, I see. Buried within the instruction sheet that comes in the mailing is the notice that "The FCC does not charge a fee to renew your license. The \$5.00 fee is to reimburse The W5YI Group for the administrative costs involved in operating a notification and renewal service." The instructions then go on to mimic the FCC instructions that somehow became separated from the 610 before being inserted into the envelope, and conclude with a large and boldfaced reminder to "Return this letter, FCC Form 610 application, and copy of your license along with the \$5.00 fee in the enclosed envelope today!"

As the skunk said, "Is it me, or is it starting to stink in here?"

When you consider the average age of an amateur radio operator and realize that many of these packages will be received by elderly people, it is more than deplorable. If you are about to write me a letter about how the above-quoted disclaimer

what defines our values and ethics. We all decide what our integrity and character are worth. Is the integrity of The W5YI Group worth about five bucks?

If you are confused as to how to complete an FCC Form 610, ask for help from someone on your local repeater or at your next ham club meeting. If you are friends with a ham who might be taken in by this kind of a scheme, ask them when their license expires and help them to get it renewed. If they can't produce a copy of their license and don't know when it expires, help them to find out.

When obtained from a legitimate source, the FCC Form 610 includes sufficient instructions to renew your license. Anyone who could manage to pass an amateur radio exam (or, for that matter, anyone who had enough brains to figure out how to obtain a license *without* taking the test) can certainly figure out how to write their own name and address and check the appropriate boxes. One thing the FCC Form 610 also includes that somehow was omitted from The W5YI Group's package is the address of the FCC, which is the only place any of you need to be sending a license renewal. 73

PROPAGATION

Number 29 on your Feedback card

Jim Gray W1XU

Jim Gray W1XU
210 East Chateau Circle
Payson AZ 85541

August has middle-of-summer type propagation conditions, and you can't expect a particularly good month for HF DX. The Solar Flux continues to decline and the usual summer "blahs" are upon us, along with hot weather throughout most of the Northern Hemisphere.

The worst days are expected to occur on the 1st, 12th-14th, and again on the 28th-31st. The best days are expected to be 5th-8th, and 18th-24th. Other days, as indicated, will be Fair or trending between Fair and Good or Poor. It looks like we may expect some severe geophysical conditions surrounding the 28th for a day or two either way. The 1st will see us emerging from some severe conditions on or near the last two days of July. As you know from following these reports over the years, we can miss by a day or two from the predicted dates in either direction, but be particularly alert on the first few and last few days of the month, keeping an ear tuned to WWV and to your local weather stations.

10 and 12 Meter Bands

Sporadic E during daylight hours on many Good days (G), with strong skip signals from 500 to 1,500 miles, and with abrupt termination of contact as the ion cloud moves out of range.

15 and 17 Meter Bands

Good sporadic E contacts between 300 and 1,300 miles on most Good (G) days. Also, you may find trans-equatorial skip into the Southern Hemisphere, with decent but not outstanding signal strength.

20 Meter Band

Consistent DX to most parts of the world on Good (G) days during daylight hours, and on particularly favorable days, often until mid-night local time. This band will be your DX workhorse.

30 and 40 Meter Bands

Nighttime DX between local sunset and sunrise ought to be good-to-excellent on days marked Good (G) on

the chart, and often on Fair (F) days. Thunderstorm activity usually abates several hours after sunset, but QRN will obscure weak signals. Day and night short skip will occur on many days, with daytime skip averaging up to 1,000 miles and nighttime skip up to 2,000 miles. Beware of high absorption levels around local noon.

80 and 160 Meter Bands

Forget any daytime activity, but when conditions are Good (G) you may well discover occasional DX at night, especially when QRN from thunderstorms isn't present. There will be few, if any, really good DX contacts on 160 or 80 during July. Short skip at night, however, can be pretty good out to about 1,000 miles or so.

Always listen to WWV and the propagation forecasts at 18 minutes after any hour, when up-to-date reports of Boulder K and A indexes are given along with solar flux readings. 73

EASTERN UNITED STATES TO:

GMT	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA							20					
ARGENTINA	20	20	20	40			20	20	15	15	15	15
AUSTRALIA	20	20	20	20	40	40	20					
CANAL ZONE	15	40	40	40	40	40	15	15	15	10	10	10
ENGLAND			40	40			20	20	20	20	20	20
HAWAII				20			20					
INDIA												
JAPAN							20	20				
MEXICO	15	40	40	40	40	40	15	15	15	10	10	10
PHILIPPINES							20					
PUERTO RICO	15	40	40	40	40	40	15	15	15	10	10	10
SOUTH AFRICA				40	40		20	20				
U.S.S.R.							20	20	20	20	20	20
WESTCOAST	20	40	40	40	40	40	20					

CENTRAL UNITED STATES TO:

GMT	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA							20	20				
ARGENTINA	15	20	20	40			20	20	15	15	15	15
AUSTRALIA	15	20	20	20	40	40	20	20	15	15	15	15
CANAL ZONE	15	20	20	20	40	40	20	20	15	15	15	15
ENGLAND	20	40					20	20	20	20	20	20
HAWAII	15	15	20	20	20	40	20	20				
INDIA												
JAPAN							20	20				
MEXICO	15	20	20	20	40	40	20	20	15	15	15	15
PHILIPPINES							20					
PUERTO RICO	15	20	20	20	40	40	20	20	15	15	15	15
SOUTH AFRICA							20	20				
U.S.S.R.							20	20	20	20	20	20

WESTERN UNITED STATES TO:

GMT	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA							20					
ARGENTINA	15	20	20	40	40		20	20	15	15	15	15
AUSTRALIA	15	20	20	20	20	40	40	20	20	15	15	15
CANAL ZONE	15	15	20	20	20	40	40	20	20	15	15	15
ENGLAND	20						20	20	20	20	20	20
HAWAII	15	15	20	20	20	40	40	20	20			
INDIA							20					
JAPAN							20					
MEXICO	15	15	20	20	40	40	20	20	15	15	15	15
PHILIPPINES							20					
PUERTO RICO	15	15	20	20	40	40	20	20	15	15	15	15
SOUTH AFRICA							20	20				
U.S.S.R.							20	20	20	20	20	20
EAST COAST	20	40	40	40	40	40	20					

AUGUST 1994

SUN	MON	TUE	WED	THU	FRI	SAT
	1 P	2 P-F	3 F	4 F-G	5 G	6 G
7 G	8 G-F	9 F	10 F-P	11 F-P	12 P	13 P
14 P	15 P-F	16 F	17 F-G	18 G	19 G	20 G
21 G	22 G	23 G	24 G	25 G-F	26 F	27 F-P
28 P	29 P	30 P	31 P			

1 = Possible 80 meter openings 2 = Check net higher band G = Good F = Fair P = Poor

FT-11R/41R 2m/70cm Handhelds

- **Frequency Coverage:**
Wide Receiver Coverage:
FT-11: 110-180 MHz RX,
144-148 MHz TX
FT-41: 430-450 MHz RX/TX
- Selectable Alpha Numeric Display
- New Compact Battery Design
4.8V produces 1.5 Watts
9.6V produces Full 5 Watts*
- 150 Memory Channels
(75 when Alpha Numeric)
- AM "Aircraft" Receive
(110-136 MHz)
- Small Compact Size w/ Easy Operation (measures only:
4"H x 2 1/4"W x 1"D)
- Rx/Tx Battery Savers
- High-efficiency MOS FET Power Module
- Large Back-Lit Keypad and Display
- Up/Down Volume/Squelch Controls
- Built-in DTMF Paging/Coded Squelch
- Automatic Power Off (APO)
- **Accessories:**
FNB-31 4.8V, 600 mAh Battery
FNB-33 4.8V, 1200 mAh Battery
FNB-38 9.6V, 600 mAh Battery
FBA-14 6 AA Size Battery Case
FTS-26 CTCSS Decode Unit
NC-50 Dual Slot 1-Hour Desk Charger
CA-10 Charge Adapter (required w/ NC-50)

*FT-11 Only.
FT-41, 3.5 Watts

"Look, alphanumeric display and a 4.8V battery. Terrific!"

"Small and thin – with a full sized keypad! How'd they do that?"

"Yaesu did it again!"

NEW!



NEW Alphanumeric Display
First time for Yaesu HT Full function LCD combines letters and numbers.

NEW Up/Down Thumb Control
with Volume and Squelch Bar Graph. No other radio has this. Back lit, too!

NEW Compact Battery Design
4.8V gets you 1.5 Watts. A first for amateur radio.

5 Watt Version Available Now!

Get a grip on this!

World's smallest size HT with a full sized keypad Measures only: 4"H x 2 1/4"W x 1"D

"Small" is relative, isn't it? It could mean size – which in this case it does. And, it could mean "reduced", which it doesn't! Nothing missing from the hot new FT-11R HT from Yaesu except bulk! You're going to wonder just how all the features of this full-function radio fit in. Until you remember Yaesu pioneered 2-way radio micro technology.

To see what this really means to you,

check out all the new features. Like the alphanumeric display. This Yaesu HT first, lets you tag your favorite frequency by name, call sign or number. Or, the new "voltage stingy" battery. It's an industry first for amateur radio. Smaller and compact, the 4.8V battery gives you 1.5 watts on TX. And, if that's not enough, there's an optional drop in, dash mount battery charger.

You see it's not a small time performer. Just small sized. The FT-11R. Another small example of Yaesu superiority. See your dealer today!

YAESU

Performance without compromise.

© 1993 Yaesu USA, 17210 Edwards Road, Cerritos, CA 90701 (310) 404-2700

Specifications subject to change without notice. Specifications guaranteed only within amateur bands. Some accessories and/or options are standard in certain areas. Check with your local Yaesu dealer for specific details.

On-Board Guidance System



New TH-79A FM DUAL BANDER

Information at your fingertips. Everything you need to know about operating the new TH-79A FM dual-bander (144MHz/440MHz) can be viewed in its unique dot-matrix LCD with alphanumeric display. No need for the manual. In addition to this innovative guide function, the TH-79A sports a user-friendly menu system, providing easy access to the many powerful features of this slim-line handheld transceiver. Such as 82 non-volatile memory channels with ID, DTSS and page functions, and a DTMF memory function for auto-dial operation. Full-crossband duplex operation is available, as is the ability to receive two frequencies on the same band (VHF+VHF or UHF+UHF) simultaneously. And thanks to the FET power module, long hours of operation are possible on one charge. With the TH-79A, transceiver technology enters the 21st century.

Features

- 2.7W approx. output (144MHz), 2W approx. output (440MHz) from MOS FET power module and supplied 6V battery; 5W approx. output using optional PB-34
- Dot-matrix LCD with menu/guide system
- 82 non-volatile memory channels with ID
- DTMF keypad with memory function
- DTSS (Dual-Tone Squelch System) with page
- Built-in CTCSS tone encoder/decoder
- Automatic band change
- Power-on call sign display
- Auto repeater offset (VHF)
- Input overvoltage warning
- 3-position output power control
- Auto power-off and battery save function
- Time-out timer
- Multiple scan modes
- Cross-band repeater function
- Page answer-back function
- Channel display function
- Wideband receiver coverage, including AM receive on the aircraft band*
- Modifiable for MARS/CAP use**

*Specifications guaranteed for Amateur bands only

**Permits required. Specifications guaranteed for Amateur bands only.

KENWOOD COMMUNICATIONS CORPORATION
AMATEUR RADIO PRODUCTS GROUP
P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745
*Customer Support/Brochures (310) 639-5300
*Repair Locations/Parts (800) KENWOOD • Bulletin Board Service (BBS) (310) 761-8264
KENWOOD ELECTRONICS CANADA INC.
6070 Kismet Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD

